

*Project Manual and Specifications*

**Parking Lot Expansion &  
Related Site Improvements  
Naugatuck High School  
Naugatuck, CT**

**Issued for BID  
March 3, 2017**

**KAESTLE BOOS**  
associates, inc

416 Slater Road, P.O. Box 2590  
New Britain, CT 06050-2590  
Phone: 860-229-0361  
Fax: 860-229-5303

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

| <b><u>PROJECT MANUAL AND SPECIFICATIONS</u></b>                            |                                     | <b>No. of Pages</b> |
|--|-------------------------------------|---------------------|
| TABLE OF CONTENTS  |                                     | 2                   |
| LIST OF DRAWINGS   |                                     | 1                   |
| PROJECT TEAM DIRECTORY   |                                     | 2                   |
| <br>   |                                     |                     |
| <b><u>BIDDING AND CONTRACT REQUIREMENTS</u></b>                            |                                     |                     |
| INVITATION TO BID  |                                     | 2                   |
| INSTRUCTIONS TO BIDDERS, AIA DOCUMENT A701                                 |                                     | 6                   |
| BID BOND, AIA DOCUMENT A310  |                                     | 2                   |
| CONTRACTOR'S QUALIFICATION STATEMENT, AIA DOCUMENT A305                    |                                     | 4                   |
| FORM OF PROPOSAL   |                                     | 4                   |
| STANDARD FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR, AIA DOCUMENT A101 |                                     | 7                   |
| GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, AIA DOCUMENT A201     |                                     | 47                  |
| PAYMENT BOND, AIA DOCUMENT A312  |                                     | 4                   |
| PERFORMANCE BOND, AIA DOCUMENT A312  |                                     | 4                   |
| PREVAILING WAGE RATES  |                                     | 44                  |
| <br>   |                                     |                     |
| <b><u>DIVISION 01 - GENERAL REQUIREMENTS</u></b>                           |                                     |                     |
| 01 10 00   | SUMMARY                             | 6                   |
| 01 22 00   | UNIT PRICES                         | 3                   |
| 01 26 00   | CONTRACT MODIFICATION PROCEDURES    | 4                   |
|  | ASI BLANK                           | 1                   |
|  | RFI BLANK                           | 1                   |
|  | PR BLANK                            | 1                   |
|  | RCOP BLANK                          | 1                   |
| 01 29 00   | PAYMENT PROCEDURES                  | 5                   |
| 01 31 00   | PROJECT MANAGEMENT AND COORDINATION | 6                   |
|  | CAD FILES AGREEMENT                 | 1                   |
| 01 32 00   | CONSTRUCTION PROGRESS DOCUMENTATION | 14                  |
| 01 32 33   | PHOTOGRAPHIC DOCUMENTATION          | 3                   |
| 01 33 00   | SUBMITTAL PROCEDURES                | 12                  |
|  | SUBMITTAL REVIEW STAMP              | 1                   |
| 01 35 01   | FLOOD CONTINGENCY PLAN              | 2                   |
| 01 40 00   | QUALITY REQUIREMENTS                | 8                   |
| 01 42 00   | REFERENCES                          | 2                   |
| 01 50 00   | TEMPORARY FACILITIES AND CONTROLS   | 9                   |
| 01 56 39   | TEMPORARY TREE AND PLANT PROTECTION | 5                   |
| 01 60 00   | PRODUCT REQUIREMENTS                | 9                   |
|  | SUBSTITUTION REQUEST FORM           | 2                   |
| 01 73 00   | EXECUTION                           | 5                   |
| 01 73 29   | CUTTING AND PATCHING                | 5                   |
| 01 77 00   | CLOSEOUT PROCEDURES                 | 4                   |
| 01 78 23   | OPERATION AND MAINTENANCE DATA      | 4                   |
| 01 78 39   | PROJECT RECORD DOCUMENTS            | 4                   |

**DIVISION 02- EXISTING CONDITIONS**

|          |                                    |   |
|----------|------------------------------------|---|
| 02 01 00 | PROTECTION OF EXISTING UTILITIES - | 3 |
|----------|------------------------------------|---|

**DIVISION 31 – EARTHWORK**

|          |  |    |
|----------|--|----|
| 31 10 00 | SITE CLEARING                                | 7  |
| 31 20 00 | EARTH MOVING                                 | 13 |
| 31 23 19 | DEWATERING                                   | 4  |
| 31 23 33 | TRENCH EXCAVATION AND BACKFILL FOR UTILITIES | 5  |
| 31 25 00 | SOIL EROSION AND SEDIMENT CONTROL            | 2  |
| 31 25 01 | ENVIRONMENTAL CONTROLS                       | 2  |

**DIVISION 32 – EXTERIOR IMPROVEMENTS**

|             |                            |    |
|-------------|----------------------------|----|
| 32 00 00    | EXTERIOR IMPROVEMENTS      | 2  |
| 32 12 16    | ASPHALT PAVING             | 9  |
| 32 12 17    | POUROUS ASPHALT PAVEMENT   | 4  |
| 32 13 13    | CONCRETE PAVING            | 14 |
| 32 16 13.26 | PRECAST CONCRETE CURBS     | 2  |
| 32 16 19    | ASPHALT CURBS              | 2  |
| 32 31 03    | METAL GUIDE RAIL           | 2  |
| 32 31 13    | CHAINLINK FENCES AND GATES | 8  |
| 32 91 01    | TOPSOIL                    | 4  |
| 32 92 00    | TURF AND GRASSES           | 10 |
| 32 93 00    | PLANTS                     | 10 |

**DIVISION 33 - UTILITIES**

|          |                     |   |
|----------|---------------------|---|
| 33 41 00 | STORM SEWER SYSTEMS | 9 |
|----------|---------------------|---|

END OF TABLE OF CONTENTS

LIST OF DRAWINGS

PROJECT COVER SHEET

|        |   |
|--------|---|
| SS1.00 | EXISTING CONDITIONS MAP                           |
| SS1.01 | SITE SURVEY (UPPER PARKING AREA A)                |
| SS1.02 | SITE SURVEY (LOWER PARKING AREA B)                |
| L0.01  | OVERALL SITE PLAN                                 |
| L1.01  | SITE DEMOLITION & PREPARATION PLAN                |
| L2.01  | SITE LAYOUT & MATERIALS PLAN                      |
| L3.01  | SITE GRADING PLAN                                 |
| L4.01  | SITE PLANTING PLAN                                |
| L5.01  | SITE DETAILS                                      |
| L5.02  | SITE DETAILS                                      |
| CG101  | DRAINAGE PLAN                                     |
| CE101  | SOIL EROSION & SEDIMENT CONTROL PLAN              |
| CE501  | DRAINAGE, SOIL EROSION & SEDIMENT CONTROL DETAILS |

END LIST OF DRAWINGS

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

---

# PROJECT TEAM AND LOCAL OFFICIALS LIST

---

## PARKING LOT EXPANSION AND RELATED SITE IMPROVEMENTS

### NAUGATUCK HIGH SCHOOL

Naugatuck, CT

KBA #16058.00

Page: 1 of 2

---

#### **BOROUGH OF NAUGATUCK**

Town Hall

229 Church Street, 4<sup>th</sup> Floor

Naugatuck, CT 06770

P: (203) 720-7009 | F:

Email: [nwarren@naugatuck-ct.gov](mailto:nwarren@naugatuck-ct.gov)

#### Mayor

N. Warren “Pete” Hess III

#### **NAUGATUCK BOARD OF EDUCATION CENTRAL ADMINISTRATION OFFICE**

380 Church Street

Naugatuck, CT 06770

P: (203) 720-5265 | F: (203) 720- 5272

Email: [rbutler@naugatuck-ct.gov](mailto:rbutler@naugatuck-ct.gov)

#### Business Manager & Controller

Robert Butler (203) 720-7027

#### **NAUGATUCK HIGH SCHOOL**

543 Rubber Avenue

Naugatuck, CT 06770

P: (203) 720-5400 | F: (203) 720-5444

#### Principal

Janice Saam

#### **LOCAL BUILDING OFFICIAL & ADA COMPLIANCE OFFICER**

Town Hall

229 Church Street, 3<sup>rd</sup> Floor

Naugatuck, CT 06770

P: (203) 720-7065 | F: (203) 720-7034

Email: [bherzman@naugatuck-ct.gov](mailto:bherzman@naugatuck-ct.gov)

#### Building Inspector

Bill Herzman

#### **FIRE CHIEF/FIRE MARSHAL**

41 Maple Street

Naugatuck, CT 06770

P: (203) 720-7080 | F: (203) 720-1348

Email: [emurray@naugatuck-ct.gov](mailto:emurray@naugatuck-ct.gov)

[rweaver@naugatuck-ct.gov](mailto:rweaver@naugatuck-ct.gov)

[wscanlon@naugatuck-ct.gov](mailto:wscanlon@naugatuck-ct.gov)

#### Fire Chief

Ellen Murray (203) 720-7085

#### Deputy Fire Marshal

Robert Weaver

#### Fire Inspector

William P. Scanlon

**P R O J E C T T E A M A N D  
L O C A L O F F I C I A L S L I S T**

---

**PARKING LOT EXPANSION AND RELATED SITE IMPROVEMENTS**

**NAUGATUCK HIGH SCHOOL**

Naugatuck, CT

KBA #16058.00

Page: 2 of 2

---

**ARCHITECT, LANDSCAPE, STRUCTURAL,**

Kaestle Boos Associates, Inc.

416 Slater Road, PO Box 2590

New Britain, CT 06050-2590

P: (860) 229-0361 | F: (860) 229-5303

Email: (first initial, full last name)@kba-architects.com

Principal-In-Charge – Charles W. Boos

Landscape Architect – Brennan White

**CIVIL ENGINEER**

Langan – Engineering & Environmental Services

555 Long Wharf Drive

New Haven, CT 06511-6107

P: (203) 562-5771 | F: (203) 789-6142

Email: [elindquist@Langan.com](mailto:elindquist@Langan.com)

Project Manager

Erik Lindquist



**INVITATION TO BID**  
**PARKING LOT EXPANSION AND RELATED SITE IMPROVEMENTS**  
**NAUGATUCK HIGH SCHOOL**  
**NAUGATUCK, CT**

Sealed bids for the **Parking Lot Expansion and Related Site Improvements to Naugatuck High School, Naugatuck, CT** addressed to **Robert Butler, Controller, c/o Wendy Hozer, Purchasing Agent** will be received in the **Purchasing Office, Naugatuck Town Hall, 229 Church Street, Naugatuck, CT 06770** until but no later than **2:00 p.m.** local time on **FRIDAY, MARCH 24, 2017**, at which time they will be publicly opened and read aloud. Late bids will be rejected.

A **Mandatory** Pre-Bid Walk Through will be held on **TUESDAY, MARCH 14, 2017**, at **2:30 p.m.** local time at the **Tennis Courts at Naugatuck High School, 543 Rubber Avenue, Naugatuck, CT 06770**.

Drawings and Specifications may be obtained directly from the printer, Joseph Merritt & Company, 650 Franklin Avenue, Hartford, CT **upon a non-refundable fee in the form of a check or money order payable to the Joseph Merritt & Company in the amount of \$70.00 for EACH SET. The Bid Documents will be available after 12:00 p.m. on MONDAY, MARCH 6, 2017.**

Drawings and Specifications can also be obtained at no cost from the Borough of Naugatuck web site: <http://www.naugatuck-ct.gov/content/bids> please contact Wendy Hozer, Purchasing Agent for any questions at [whozer@naugatuck-ct.gov](mailto:whozer@naugatuck-ct.gov).

**Addenda will be issued to all Bidders who have secured Drawings and Specifications from Joseph Merritt & Company. Faxes or emails of Addenda will not be provided by the Architect.**

The Proposal, Specifications and Contract Documents, may be examined at the following locations:

**NAUGATUCK TOWN HALL**  
**WENDY HOZER, PURCHASING AGENT**  
229 CHURCH STREET  
NAUGATUCK, CT 06770  
VOICE: 203-720-7025  
FAX: 203-720-7031

**JOSEPH MERRITT & CO.**  
650 FRANKLIN AVENUE  
HARTFORD, CT 06114  
VOICE: 860-296-2500  
FAX: 860-947-3288

Federal Express orders will only be considered if accompanied by a properly filled out Federal Express form (one form for each set ordered), charging the order to the Contractor's account.

As Security, each Bid must be accompanied by a Certified Check or Cashier's Check drawn upon either a State Bank and Trust Company or a National Banking Association, to the order of the **Borough of Naugatuck**, or the Bid must be accompanied by a Bid Bond having as surety thereto, such Surety Company or Companies as are authorized to do business in the State of Connecticut of an amount not less than (5%) of the Bid. **NO BID WILL BE ACCEPTED UNLESS ACCOMPANIED BY THE REQUIRED BID DEPOSIT.**

Upon award and prior to any work being performed a 100% Performance, Labor and Material Payment Bond and other Bonds subject to the conditions provided for in the Bid Specifications are required. A Certificate of Insurance will also be required naming the **Borough of Naugatuck** as an additional insured.

All Bidders shall refer to *AIA Document A701-1997 – Instructions to Bidders*, Article 4 – Bidding Procedures, paragraph 4.1.1 “Preparation of Bids.”

All Requests for Information (RFI) are to be emailed or faxed to the attention of Brennan White at [bwhite@kba-architects.com](mailto:bwhite@kba-architects.com) or faxed at (860) 229-5303. RFIs must be received by the Architect by **MARCH 17, 2017 – Last day to receive RFIs**.

All Bidders must submit a Contractors Qualification Statement AIA Document A305 with the bid.

Bidders shall not include Federal Excise Taxes or State of Connecticut Sales Taxes on which Public Buildings are exempt.

The Bidder must submit with the bid package a copy of the appropriate Connecticut Department of Administrative Services (DAS) prequalification in their classification. DAS prequalification for General Building Construction Group B is required.

All bidders, General Contractors (GC) and subcontractors of (GC) must be pre-qualified with the State of Connecticut Department of Administrative Services (DAS). Any bidders not on the pre-qualification list with DAS at the time of the bid opening shall be disqualified from bidding.

All Bidders should make an effort to consider the use of local trade contractors.

Bids must be held firm and may not be withdrawn for ninety (90) days after the bid opening.

The **Borough of Naugatuck** reserves the right to waive any informalities in Bids, to reject any or all Bids, or to accept any proposal that in their judgment will be in the best interest of the Town.

The **Borough of Naugatuck** does not discriminate on the basis of sex, race, age, physical disability, religion or national origin.

The **Borough of Naugatuck** is an Affirmative Action/Equal Opportunity Employer. Minority/Women’s Business Enterprises are encouraged to apply.



**AIA**<sup>®</sup>

# Document A701<sup>™</sup> – 1997

## **Instructions to Bidders**

### **for the following PROJECT:**

*(Name and location or address)*

Naugatuck High School – Parking Lot Expansion & Related Site Improvements  
543 Rubber Avenue  
Naugatuck, CT 06770

### **THE OWNER:**

*(Name, legal status and address)*

Borough of Naugatuck  
229 Church Street  
Naugatuck, CT 06770

### **THE ARCHITECT:**

*(Name, legal status and address)*

Kaestle Boos Associates, Inc.  
416 Slater Road, P.O. Box 2590  
New Britain, CT 06050-2590

### **ADDITIONS AND DELETIONS:**

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

## **TABLE OF ARTICLES**

- 1        DEFINITIONS**
- 2        BIDDER'S REPRESENTATIONS**
- 3        BIDDING DOCUMENTS**
- 4        BIDDING PROCEDURES**
- 5        CONSIDERATION OF BIDS**
- 6        POST-BID INFORMATION**
- 7        PERFORMANCE BOND AND PAYMENT BOND**
- 8        FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR**

## **ARTICLE 1 DEFINITIONS**

§ 1.1 Bidding Documents include the Bidding Requirements and the proposed Contract Documents. The Bidding Requirements consist of the Advertisement or Invitation to Bid, Instructions to Bidders, Supplementary Instructions to Bidders, the bid form, and other sample bidding and contract forms. The proposed Contract Documents consist of the form of Agreement between the Owner and Contractor, Conditions of the Contract (General, Supplementary and other Conditions), Drawings, Specifications and all Addenda issued prior to execution of the Contract.

§ 1.2 Definitions set forth in the General Conditions of the Contract for Construction, AIA Document A201, or in other Contract Documents are applicable to the Bidding Documents.

§ 1.3 Addenda are written or graphic instruments issued by the Architect prior to the execution of the Contract which modify or interpret the Bidding Documents by additions, deletions, clarifications or corrections.

§ 1.4 A Bid is a complete and properly executed proposal to do the Work for the sums stipulated therein, submitted in accordance with the Bidding Documents.

§ 1.5 The Base Bid is the sum stated in the Bid for which the Bidder offers to perform the Work described in the Bidding Documents as the base, to which Work may be added or from which Work may be deleted for sums stated in Alternate Bids.

§ 1.6 An Alternate Bid (or Alternate) is an amount stated in the Bid to be added to or deducted from the amount of the Base Bid if the corresponding change in the Work, as described in the Bidding Documents, is accepted.

§ 1.7 A Unit Price is an amount stated in the Bid as a price per unit of measurement for materials, equipment or services or a portion of the Work as described in the Bidding Documents.

§ 1.8 A Bidder is a person or entity who submits a Bid and who meets the requirements set forth in the Bidding Documents.

§ 1.9 A Sub-bidder is a person or entity who submits a bid to a Bidder for materials, equipment or labor for a portion of the Work.

## **ARTICLE 2 BIDDER'S REPRESENTATIONS**

§ 2.1 The Bidder by making a Bid represents that:

§ 2.1.1 The Bidder has read and understands the Bidding Documents or Contract Documents, to the extent that such documentation relates to the Work for which the Bid is submitted, and for other portions of the Project, if any, being bid concurrently or presently under construction.

§ 2.1.2 The Bid is made in compliance with the Bidding Documents.

§ 2.1.3 The Bidder has visited the site, become familiar with local conditions under which the Work is to be performed and has correlated the Bidder's personal observations with the requirements of the proposed Contract Documents.

§ 2.1.4 The Bid is based upon the materials, equipment and systems required by the Bidding Documents without exception.

## **ARTICLE 3 BIDDING DOCUMENTS**

### **§ 3.1 COPIES**

§ 3.1.1 Bidders may obtain complete sets of the Bidding Documents from the issuing office designated in the Advertisement or Invitation to Bid in the number and for the non-refundable deposit sum, if any, stated therein.

§ 3.1.2 Bidding Documents will not be issued directly to Sub-bidders unless specifically offered in the Advertisement or Invitation to Bid, or in supplementary instructions to bidders.

§ 3.1.3 Bidders shall use complete sets of Bidding Documents in preparing Bids; neither the Owner nor Architect assumes responsibility for errors or misinterpretations resulting from the use of incomplete sets of Bidding Documents.

§ 3.1.4 The Owner and Architect may make copies of the Bidding Documents available on the above terms for the purpose of obtaining Bids on the Work. No license or grant of use is conferred by issuance of copies of the Bidding Documents.

### § 3.2 INTERPRETATION OR CORRECTION OF BIDDING DOCUMENTS

§ 3.2.1 The Bidder shall carefully study and compare the Bidding Documents with each other, and with other work being bid concurrently or presently under construction to the extent that it relates to the Work for which the Bid is submitted, shall examine the site and local conditions, and shall at once report to the Architect errors, inconsistencies or ambiguities discovered.

§ 3.2.2 Bidders and Sub-bidders requiring clarification or interpretation of the Bidding Documents shall make a written request which must be received by the Architect at **BY MARCH 17, 2017 – LAST DAY TO RECEIVE REQUEST FOR INFORMATION (RFI'S)**. Written requests shall be emailed or faxed to the attention of Brennan White at [bwhite@kba-architects.com](mailto:bwhite@kba-architects.com) or faxed at (860) 229-5303.

§ 3.2.3 Interpretations, corrections and changes of the Bidding Documents will be made by Addendum. The Addendum will be faxed or emailed to all prospective bidders, who have secured drawings and specifications from the printer- Joseph Merritt & Company, no later than three (3) days prior to the date for receipt of bids. Faxes or emails of Addenda will not be provided by the Architect. Interpretations, corrections and changes of the Bidding Documents made in any other manner will not be binding, and Bidders shall not rely upon them.

### § 3.3 SUBSTITUTIONS

§ 3.3.1 The materials, products and equipment described in the Bidding Documents establish a standard of required function, dimension, appearance and quality to be met by any proposed substitution.

§ 3.3.2 No substitution will be considered prior to receipt of Bids unless written request for approval has been received by the Architect at least ten days prior to the date for receipt of Bids. Such requests shall include the name of the material or equipment for which it is to be substituted and a complete description of the proposed substitution including drawings, performance and test data, and other information necessary for an evaluation. A statement setting forth changes in other materials, equipment or other portions of the Work, including changes in the work of other contracts that incorporation of the proposed substitution would require, shall be included. The burden of proof of the merit of the proposed substitution is upon the proposer. The Architect's decision of approval or disapproval of a proposed substitution shall be final.

§ 3.3.3 If the Architect approves a proposed substitution prior to receipt of Bids, such approval will be set forth in an Addendum. Bidders shall not rely upon approvals made in any other manner.

§ 3.3.4 No substitutions will be considered after the Contract award unless specifically provided for in the Contract Documents.

### § 3.4 ADDENDA

§ 3.4.1 Addenda will be transmitted to all who are known by the issuing office to have received a complete set of Bidding Documents.

§ 3.4.2 Copies of Addenda will be made available for inspection wherever Bidding Documents are on file for that purpose.

§ 3.4.3 Addenda will be issued no later than three days prior to the date for receipt of Bids except an Addendum withdrawing the request for Bids or one which includes postponement of the date for receipt of Bids.

§ 3.4.4 Each Bidder shall ascertain prior to submitting a Bid that the Bidder has received all Addenda issued, and the Bidder shall acknowledge their receipt in the Bid.

## ARTICLE 4 BIDDING PROCEDURES

### § 4.1 PREPARATION OF BIDS

§ 4.1.1 Bids shall be submitted on the forms included with the Bidding Documents. **Bidders are to submit one (1) original and one (1) copy of their Bid.**

§ 4.1.2 All blanks on the bid form shall be legibly executed in a non-erasable medium.

§ 4.1.3 Sums shall be expressed in both words and figures. In case of discrepancy, the amount written in words shall govern.

§ 4.1.4 Interlineations, alterations and erasures must be initialed by the signer of the Bid.

§ 4.1.5 All requested Alternates shall be bid. If no change in the Base Bid is required, enter "No Change."

§ 4.1.6 Where two or more Bids for designated portions of the Work have been requested, the Bidder may, without forfeiture of the bid security, state the Bidder's refusal to accept award of less than the combination of Bids stipulated by the Bidder. The Bidder shall make no additional stipulations on the bid form nor qualify the Bid in any other manner.

§ 4.1.7 Each copy of the Bid shall state the legal name of the Bidder and the nature of legal form of the Bidder. The Bidder shall provide evidence of legal authority to perform within the jurisdiction of the Work. Each copy shall be signed by the person or persons legally authorized to bind the Bidder to a contract. A Bid by a corporation shall further give the state of incorporation and have the corporate seal affixed. A Bid submitted by an agent shall have a current power of attorney attached certifying the agent's authority to bind the Bidder.

### § 4.2 BID SECURITY

§ 4.2.1 Each Bid shall be accompanied by a bid security in the form and amount required if so stipulated in the Instructions to Bidders. The Bidder pledges to enter into a Contract with the Owner on the terms stated in the Bid and will, if required, furnish bonds covering the faithful performance of the Contract and payment of all obligations arising thereunder. Should the Bidder refuse to enter into such Contract or fail to furnish such bonds if required, the amount of the bid security shall be forfeited to the Owner as liquidated damages, not as a penalty. The amount of the bid security shall not be forfeited to the Owner in the event the Owner fails to comply with Section 6.2.

§ 4.2.2 If a surety bond is required, it shall be written on AIA Document A310, Bid Bond, unless otherwise provided in the Bidding Documents, and the attorney-in-fact who executes the bond on behalf of the surety shall affix to the bond a certified and current copy of the power of attorney.

§ 4.2.3 The Owner will have the right to retain the bid security of Bidders to whom an award is being considered until either (a) the Contract has been executed and bonds, if required, have been furnished, or (b) the specified time has elapsed so that Bids may be withdrawn or (c) all Bids have been rejected.

### § 4.3 SUBMISSION OF BIDS

§ 4.3.1 All copies of the Bid, the bid security, if any, and any other documents required to be submitted with the Bid shall be enclosed in a sealed opaque envelope. The envelope shall be addressed to the party receiving the Bids and shall be identified with the Project name, the Bidder's name and address and, if applicable, the designated portion of the Work for which the Bid is submitted. If the Bid is sent by mail, the sealed envelope shall be enclosed in a separate mailing envelope with the notation "SEALED BID ENCLOSED" on the face thereof.

§ 4.3.2 Bids shall be deposited at the designated location prior to the time and date for receipt of Bids. Bids received after the time and date for receipt of Bids will be returned unopened.

§ 4.3.3 The Bidder shall assume full responsibility for timely delivery at the location designated for receipt of Bids.

§ 4.3.4 Oral, telephonic, telegraphic, facsimile or other electronically transmitted bids will not be considered.

#### **§ 4.4 MODIFICATION OR WITHDRAWAL OF BID**

**§ 4.4.1** A Bid may not be modified, withdrawn or canceled by the Bidder during the stipulated time period following the time and date designated for the receipt of Bids, and each Bidder so agrees in submitting a Bid.

**§ 4.4.2** Prior to the time and date designated for receipt of Bids, a Bid submitted may be modified or withdrawn by notice to the party receiving Bids at the place designated for receipt of Bids. Such notice shall be in writing over the signature of the Bidder. Written confirmation over the signature of the Bidder shall be received, and date- and time-stamped by the receiving party on or before the date and time set for receipt of Bids. A change shall be so worded as not to reveal the amount of the original Bid.

**§ 4.4.3** Withdrawn Bids may be resubmitted up to the date and time designated for the receipt of Bids provided that they are then fully in conformance with these Instructions to Bidders.

**§ 4.4.4** Bid security, if required, shall be in an amount sufficient for the Bid as resubmitted.

#### **ARTICLE 5 CONSIDERATION OF BIDS**

##### **§ 5.1 OPENING OF BIDS**

At the discretion of the Owner, if stipulated in the Advertisement or Invitation to Bid, the properly identified Bids received on time will be publicly opened and will be read aloud. An abstract of the Bids may be made available to Bidders.

##### **§ 5.2 REJECTION OF BIDS**

The Owner shall have the right to reject any or all Bids. A Bid not accompanied by a required bid security or by other data required by the Bidding Documents, or a Bid which is in any way incomplete or irregular is subject to rejection.

##### **§ 5.3 ACCEPTANCE OF BID (AWARD)**

**§ 5.3.1** It is the intent of the Owner to award a Contract to the lowest qualified Bidder provided the Bid has been submitted in accordance with the requirements of the Bidding Documents and does not exceed the funds available. The Owner shall have the right to waive informalities and irregularities in a Bid received and to accept the Bid which, in the Owner's judgment, is in the Owner's own best interests.

**§ 5.3.2** The Owner shall have the right to accept Alternates in any order or combination, unless otherwise specifically provided in the Bidding Documents, and to determine the low Bidder on the basis of the sum of the Base Bid and Alternates accepted.

#### **ARTICLE 6 POST-BID INFORMATION**

##### **§ 6.1 CONTRACTOR'S QUALIFICATION STATEMENT**

Bidders to whom award of a Contract is under consideration shall submit to the Architect, upon request, a properly executed AIA Document A305, Contractor's Qualification Statement, unless such a Statement has been previously required and submitted as a prerequisite to the issuance of Bidding Documents.

##### **§ 6.2 OWNER'S FINANCIAL CAPABILITY**

The Owner shall, at the request of the Bidder to whom award of a Contract is under consideration and no later than seven days prior to the expiration of the time for withdrawal of Bids, furnish to the Bidder reasonable evidence that financial arrangements have been made to fulfill the Owner's obligations under the Contract. Unless such reasonable evidence is furnished, the Bidder will not be required to execute the Agreement between the Owner and Contractor.

##### **§ 6.3 SUBMITTALS**

**§ 6.3.1** The Bidder shall, as soon as practicable or as stipulated in the Bidding Documents, after notification of selection for the award of a Contract, furnish to the Owner through the Architect in writing:

- .1 a designation of the Work to be performed with the Bidder's own forces;
- .2 names of the manufacturers, products, and the suppliers of principal items or systems of materials and equipment proposed for the Work; and
- .3 names of persons or entities (including those who are to furnish materials or equipment fabricated to a special design) proposed for the principal portions of the Work.

§ 6.3.2 The Bidder will be required to establish to the satisfaction of the Architect and Owner the reliability and responsibility of the persons or entities proposed to furnish and perform the Work described in the Bidding Documents.

§ 6.3.3 Prior to the execution of the Contract, the Architect will notify the Bidder in writing if either the Owner or Architect, after due investigation, has reasonable objection to a person or entity proposed by the Bidder. If the Owner or Architect has reasonable objection to a proposed person or entity, the Bidder may, at the Bidder's option, (1) withdraw the Bid or (2) submit an acceptable substitute person or entity with an adjustment in the Base Bid or Alternate Bid to cover the difference in cost occasioned by such substitution. The Owner may accept the adjusted bid price or disqualify the Bidder. In the event of either withdrawal or disqualification, bid security will not be forfeited.

§ 6.3.4 Persons and entities proposed by the Bidder and to whom the Owner and Architect have made no reasonable objection must be used on the Work for which they were proposed and shall not be changed except with the written consent of the Owner and Architect.

## **ARTICLE 7 PERFORMANCE BOND AND PAYMENT BOND**

### **§ 7.1 BOND REQUIREMENTS**

§ 7.1.1 If stipulated in the Bidding Documents, the Bidder shall furnish bonds covering the faithful performance of the Contract and payment of all obligations arising thereunder. Bonds may be secured through the Bidder's usual sources.

§ 7.1.2 If the furnishing of such bonds is stipulated in the Bidding Documents, the cost shall be included in the Bid. If the furnishing of such bonds is required after receipt of bids and before execution of the Contract, the cost of such bonds shall be added to the Bid in determining the Contract Sum.

§ 7.1.3 If the Owner requires that bonds be secured from other than the Bidder's usual sources, changes in cost will be adjusted as provided in the Contract Documents.

### **§ 7.2 TIME OF DELIVERY AND FORM OF BONDS**

§ 7.2.1 The Bidder shall deliver the required bonds to the Owner not later than three days following the date of execution of the Contract. If the Work is to be commenced prior thereto in response to a letter of intent, the Bidder shall, prior to commencement of the Work, submit evidence satisfactory to the Owner that such bonds will be furnished and delivered in accordance with this Section 7.2.1.

§ 7.2.2 Unless otherwise provided, the bonds shall be written on AIA Document A312, Performance Bond and Payment Bond. Both bonds shall be written in the amount of the Contract Sum.

§ 7.2.3 The bonds shall be dated on or after the date of the Contract.

§ 7.2.4 The Bidder shall require the attorney-in-fact who executes the required bonds on behalf of the surety to affix thereto a certified and current copy of the power of attorney.

## **ARTICLE 8 FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR**

Unless otherwise required in the Bidding Documents, the Agreement for the Work will be written on AIA Document A101, Standard Form of Agreement Between Owner and Contractor Where the Basis of Payment Is a Stipulated Sum.





# Document A310™ – 2010

## Bid Bond

**CONTRACTOR:**

*(Name, legal status and address)*

**SURETY:**

*(Name, legal status and principal place of business)*

**OWNER:**

*(Name, legal status and address)*

Borough of Naugatuck  
229 Church Street  
Naugatuck, CT 06770

**BOND AMOUNT: \$****PROJECT:**

*(Name, location or address, and Project number, if any)*

Naugatuck High School - Parking Lot Expansion & Related Site Improvements  
543 Rubber Avenue  
Naugatuck, CT 06770

**ADDITIONS AND DELETIONS:**

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

Any singular reference to Contractor, Surety, Owner or other party shall be considered plural where applicable.

The Contractor and Surety are bound to the Owner in the amount set forth above, for the payment of which the Contractor and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, as provided herein. The conditions of this Bond are such that if the Owner accepts the bid of the Contractor within the time specified in the bid documents, or within such time period as may be agreed to by the Owner and Contractor, and the Contractor either (1) enters into a contract with the Owner in accordance with the terms of such bid, and gives such bond or bonds as may be specified in the bidding or Contract Documents, with a surety admitted in the jurisdiction of the Project and otherwise acceptable to the Owner, for the faithful performance of such Contract and for the prompt payment of labor and material furnished in the prosecution thereof; or (2) pays to the Owner the difference, not to exceed the amount of this Bond, between the amount specified in said bid and such larger amount for which the Owner may in good faith contract with another party to perform the work covered by said bid, then this obligation shall be null and void, otherwise to remain in full force and effect. The Surety hereby waives any notice of an agreement between the Owner and Contractor to extend the time in which the Owner may accept the bid. Waiver of notice by the Surety shall not apply to any extension exceeding sixty (60) days in the aggregate beyond the time for acceptance of bids specified in the bid documents, and the Owner and Contractor shall obtain the Surety's consent for an extension beyond sixty (60) days.

If this Bond is issued in connection with a subcontractor's bid to a Contractor, the term Contractor in this Bond shall be deemed to be Subcontractor and the term Owner shall be deemed to be Contractor.

When this Bond has been furnished to comply with a statutory or other legal requirement in the location of the Project, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. When so

Init.

AIA Document A310™ – 2010. Copyright © 1963, 1970 and 2010 by The American Institute of Architects. All rights reserved. WARNING: This AIA® Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA® Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law. This document was produced by AIA software at 16:13:46 on 01/26/2017 under Order No.5992967110\_1 which expires on 04/03/2017, and is not for resale.  
User Notes:

(1496676921)





**AIA®**

# Document A305™ – 1986

## Contractor's Qualification Statement

The Undersigned certifies under oath that the information provided herein is true and sufficiently complete so as not to be misleading.

GENERAL CONTRACTORS (GC) AND SUBCONTRACTORS OF GC SHALL MEET ALL PREQUALIFICATION REQUIREMENTS OF THE DEPARTMENT OF ADMINISTRATIVE SERVICES (DAS).

**SUBMITTED TO:**

**ADDRESS:**

**SUBMITTED BY:**

**NAME:**

**ADDRESS:**

**PRINCIPAL OFFICE:**

- Corporation
- Partnership
- Individual
- Joint Venture
- Other

**NAME OF PROJECT** (if applicable): Naugatuck High School – Parking Lot Expansion & Related Site Improvements

**TYPE OF WORK** (file separate form for each Classification of Work):

- General Construction
- HVAC
- Electrical
- Plumbing
- Other (please specify)

### § 1. ORGANIZATION

§ 1.1 How many years has your organization been in business as a Contractor?

§ 1.2 How many years has your organization been in business under its present business name?

§ 1.2.1 Under what other or former names has your organization operated?

### ADDITIONS AND DELETIONS:

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

This form is approved and recommended by the American Institute of Architects (AIA) and The Associated General Contractors of America (AGC) for use in evaluating the qualifications of contractors. No endorsement of the submitting party or verification of the information is made by AIA or AGC.

§ 1.3 If your organization is a corporation, answer the following:

- § 1.3.1 Date of incorporation:
- § 1.3.2 State of incorporation:
- § 1.3.3 President's name:
- § 1.3.4 Vice-president's name(s)

- § 1.3.5 Secretary's name:
- § 1.3.6 Treasurer's name:

§ 1.4 If your organization is a partnership, answer the following:

- § 1.4.1 Date of organization:
- § 1.4.2 Type of partnership (if applicable):
- § 1.4.3 Name(s) of general partner(s)

§ 1.5 If your organization is individually owned, answer the following:

- § 1.5.1 Date of organization:
- § 1.5.2 Name of owner:

§ 1.6 If the form of your organization is other than those listed above, describe it and name the principals:

## § 2. LICENSING

§ 2.1 List jurisdictions and trade categories in which your organization is legally qualified to do business, and indicate registration or license numbers, if applicable.

§ 2.2 List jurisdictions in which your organization's partnership or trade name is filed.

## § 3. EXPERIENCE

§ 3.1 List the categories of work that your organization normally performs with its own forces.

§ 3.2 Claims and Suits. (If the answer to any of the questions below is yes, please attach details.)

§ 3.2.1 Has your organization ever failed to complete any work awarded to it?

§ 3.2.2 Are there any judgments, claims, arbitration proceedings or suits pending or outstanding against your organization or its officers?

§ 3.2.3 Has your organization filed any law suits or requested arbitration with regard to construction contracts within the last five years?

§ 3.3 Within the last five years, has any officer or principal of your organization ever been an officer or principal of another organization when it failed to complete a construction contract? (If the answer is yes, please attach details.)

§ 3.4 On a separate sheet, list major construction projects your organization has in progress, giving the name of project, owner, architect, contract amount, percent complete and scheduled completion date. Projects listed completed in the last five years must be of a similar size and scope to this project and must be completed under the same company name/corporate structure for a minimum of five years.

§ 3.4.1 State total worth of work in progress and under contract:

§ 3.5 On a separate sheet, list the major projects your organization has completed in the past five years, giving the name of project, owner, architect, contract amount, date of completion and percentage of the cost of the work performed with your own forces. Demonstrate to the Owner's satisfaction that these projects were completed in a timely manner. Failure to comply may be grounds for disqualification.

§ 3.5.1 State average annual amount of construction work performed during the past five years:

§ 3.6 On a separate sheet, list the construction experience and present commitments of the key individuals of your organization.

#### § 4. REFERENCES

§ 4.1 Trade References:

§ 4.2 Bank References:

§ 4.3 Surety:

§ 4.3.1 Name of bonding company:

§ 4.3.2 Name and address of agent:

#### § 5. FINANCING

§ 5.1 Financial Statement.

§ 5.1.1 Attach a financial statement, preferably audited, including your organization's latest balance sheet and income statement showing the following items:

Current Assets (e.g., cash, joint venture accounts, accounts receivable, notes receivable, accrued income, deposits, materials inventory and prepaid expenses);

Net Fixed Assets;

Other Assets;

Current Liabilities (e.g., accounts payable, notes payable, accrued expenses, provision for income taxes, advances, accrued salaries and accrued payroll taxes);

Other Liabilities (e.g., capital, capital stock, authorized and outstanding shares par values, earned surplus and retained earnings).

§ 5.1.2 Name and address of firm preparing attached financial statement, and date thereof:

§ 5.1.3 Is the attached financial statement for the identical organization named on page one?

§ 5.1.4 If not, explain the relationship and financial responsibility of the organization whose financial statement is provided (e.g., parent-subsidiary).

§ 5.2 Will the organization whose financial statement is attached act as guarantor of the contract for construction?

§ 6. SIGNATURE

§ 6.1 Dated at this      day of

Name of Organization:

By:

Title:

§ 6.2

M      being duly sworn deposes and says that the information provided herein is true and sufficiently complete so as not to be misleading.

Subscribed and sworn before me this      day of

Notary Public:

My Commission Expires:

**FORM OF PROPOSAL**

**PARKING LOT EXPANSION AND RELATED SITE IMPROVEMENTS  
NAUGATUCK HIGH SCHOOL  
NAUGATUCK, CT**

**TO: Mr. Robert Butler, Business Manager/Controller  
c/o Ms. Wendy Hozer, Purchasing Agent  
Purchasing Office, Naugatuck Town Hall  
229 Church Street  
Naugatuck, CT 06770**

Pursuant to and in compliance with your "Invitation to Bid" relating thereto, the undersigned,

---

(Name of Firm)

having visited the site and carefully examined the Drawings, Bidding Documents and complete Specifications **dated March 3, 2017** together with all Addenda issued and received prior to scheduled closing time for recipient of Bids as prepared by the Architects, KAESTLE BOOS ASSOCIATES, INC., 416 Slater Road, New Britain, Connecticut, hereby offers and agrees as follows:

To provide all labor, materials, and all else whatsoever necessary to erect and properly finish all work in connection with the

**PARKING LOT EXPANSION AND RELATED SITE IMPROVEMENTS  
NAUGATUCK HIGH SCHOOL  
NAUGATUCK, CT**

to provide all labor, materials, and all else whatsoever necessary to construct all improvements described in the specifications.

A. Naugatuck High School – Upper Parking Lot "A" Repairs and Related Site Work for the sum of:

\_\_\_\_\_ (\$ \_\_\_\_\_)

B. Naugatuck High School – Lower Parking Lot "B" Expansion and Related Site Improvements for the sum of:

\_\_\_\_\_ (\$ \_\_\_\_\_)

Combined Bid for both projects for the sum of:

\_\_\_\_\_ (\$ \_\_\_\_\_)

Contractor has an option to either bid on A. Naugatuck High School – Upper Parking Lot Repairs and Related Site Work or B. Naugatuck High School – Lower Parking Lot Expansion and Related Site Improvements or Combined Bid.

**Note: Both Bids must be submitted separately in order to submit a combined Bid.  
The Owner reserves the right to select the best combination (lowest) in the best interest of the Borough.**

If awarded this Contract, we will execute a Contract with the **Borough of Naugatuck**, Owner of the property.

UNIT PRICES

Should the amount of improvements required be increased or decreased due to special considerations found at the site or because of a request of the **Naugatuck Board of Education**, the undersigned agrees that the following supplemental UNIT PRICES will be the basic price in place for computing the EXTRA or CREDIT.

Each UNIT PRICE shall include all equipment, tools, labor, permits, fees, etc., incidental to the installation and completion of the work involved.

The amounts shown are net changes to the Contract for additional work and include the Contractor's and any Subcontractor's amounts for overhead and profit. For deleted work, the net credit to the Contract shall be 10% less.

All work is to be accomplished in accordance with applicable Sections of the Specifications.

|                    |                      |
|--------------------|----------------------|
| C.Y. = cubic yard  | S.F. = square foot   |
| S.Y. = square yard | V.F. = vertical foot |
| L.F. = linear foot | EA = Each            |

ITEMS

1. Mass Earth Excavation – Mass Earth Excavation including the completion of the excavation, formation and compaction of the subgrade, and the disposal of surplus or unsuitable material according to Division 31 Section “Earth Moving.” \$ \_\_\_\_\_/C.Y.
2. Trench Earth Excavation – Trench Earth Excavation including the completion of the excavation, formation and compaction of the subgrade, and the disposal of surplus or unsuitable material according to Division 31 Section "Earth Moving". \$ \_\_\_\_\_/C.Y.
3. Asphalt Pavement for Patching – Asphalt Pavement for (1 ½” top course, 2” binder course) patching, including supplementing base aggregate, sawcutting and pavement removal, according to Division 32 Section “Asphalt Paving”. \$ \_\_\_\_\_/S.Y.
4. Unsuitable Soils – Description: Remove and replace with compacted processed aggregate according to Division 31 Section "Earth Moving.". \$ \_\_\_\_\_/C.Y.
5. Processed Aggregate - Processed Aggregate (in place) including compaction according to Division 31 Section “Earth Moving.” \$ \_\_\_\_\_/C.Y.



- 6. 6 Foot Galvanized Steel Chain Link Fence – 6 foot Galvanized Steel Chain Link Fence according to Division 32 Section "Chain Link Fences and Gates" Detail 7, Sheet L5.01.  
\$ \_\_\_\_\_/L.F.
- 7. Separation Fabric – Separation Fabric according to Division 31 Section "Earth Moving".  
\$ \_\_\_\_\_/S.F.
- 8. CTDOT Modified Rip Rap – Supply and installation of modified rip rap, including removal of topsoil, compaction of the subgrade and placement of geotextile separation fabric according to Division 31 Section "Earth Moving." Detail 1, Sheet L5.02.  
\$ \_\_\_\_\_/S.Y.

CONTRACT TIME

The undersigned Bidder hereby certifies that Substantial Completion and Final Completion will be achieved in accordance with the time designated in the General Conditions of the Contract for Construction.

The undersigned hereby certifies that he is able to furnish labor that can work in harmony with all other elements of labor employed or to be employed on the work. The Bid includes Addenda listed below and they are hereby acknowledged:

Addendum No. # \_\_\_\_\_ Dated \_\_\_\_\_

Addendum No. # \_\_\_\_\_ Dated \_\_\_\_\_

Addendum No. # \_\_\_\_\_ Dated \_\_\_\_\_

ATTACHMENTS

Enclosed herewith, is the Bid Security which is in the form of:

Bid Bond (    )

Certified Check (    )

In the Amount of

\$ \_\_\_\_\_ Dollars

SIGNATURE

\_\_\_\_\_  
Contractor Firm

\_\_\_\_\_  
Authorized Signature

\_\_\_\_\_  
Printed Name and Title

\_\_\_\_\_  
Business Address

\_\_\_\_\_  
City and State

\_\_\_\_\_  
Telephone Number

\_\_\_\_\_  
Telephone Fax Number



# Document A101™ – 2007

## **Standard Form of Agreement Between Owner and Contractor where the basis of payment is a Stipulated Sum**

**AGREEMENT** made as of the    day of    in the year    Two Thousand Seventeen  
(In words, indicate day, month and year.)

**BETWEEN** the Owner:  
(Name, legal status, address and other information)

Borough of Naugatuck  
229 Church Street  
Naugatuck, CT 06770

and the Contractor:  
(Name, legal status, address and other information)

for the following Project:  
(Name, location and detailed description)

Naugatuck High School – Parking Lot Expansion & Related Site Improvements  
543 Rubber Avenue  
Naugatuck, CT 06770

The Architect:  
(Name, legal status, address and other information)

Kaestle Boos Associates, Inc.  
416 Slater Road, P.O. Box 2590  
New Britain, CT 06050-2590  
Telephone Number: (860) 229-0361  
Fax Number: (860) 229-5303

The Owner and Contractor agree as follows.

### **ADDITIONS AND DELETIONS:**

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

AIA Document A201™–2007, General Conditions of the Contract for Construction, is adopted in this document by reference. Do not use with other general conditions unless this document is modified.

## TABLE OF ARTICLES

- 1 THE CONTRACT DOCUMENTS
- 2 THE WORK OF THIS CONTRACT
- 3 DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION
- 4 CONTRACT SUM
- 5 PAYMENTS
- 6 DISPUTE RESOLUTION
- 7 TERMINATION OR SUSPENSION
- 8 MISCELLANEOUS PROVISIONS
- 9 ENUMERATION OF CONTRACT DOCUMENTS
- 10 INSURANCE AND BONDS

### ARTICLE 1 THE CONTRACT DOCUMENTS

The Contract Documents consist of this Agreement, Conditions of the Contract (General, Supplementary and other Conditions), Drawings, Specifications, Addenda issued prior to execution of this Agreement, other documents listed in this Agreement and Modifications issued after execution of this Agreement, all of which form the Contract, and are as fully a part of the Contract as if attached to this Agreement or repeated herein. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations or agreements, either written or oral. An enumeration of the Contract Documents, other than a Modification, appears in Article 9.

### ARTICLE 2 THE WORK OF THIS CONTRACT

The Contractor shall fully execute the Work described in the Contract Documents, except as specifically indicated in the Contract Documents to be the responsibility of others.

### ARTICLE 3 DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION

§ 3.1 The date of commencement of the Work shall be the date of this Agreement unless a different date is stated below or provision is made for the date to be fixed in a notice to proceed issued by the Owner.

*(Insert the date of commencement if it differs from the date of this Agreement or, if applicable, state that the date will be fixed in a notice to proceed.)*

If, prior to the commencement of the Work, the Owner requires time to file mortgages and other security interests, the Owner's time requirement shall be as follows:

§ 3.2 The Contract Time shall be measured from the date of commencement.

§ 3.3 The Contractor shall achieve Substantial Completion of the entire Work not later than ( ) days from the date of commencement, or as follows:

*(Insert number of calendar days. Alternatively, a calendar date may be used when coordinated with the date of commencement. If appropriate, insert requirements for earlier Substantial Completion of certain portions of the Work.)*

Init.

**Portion of Work**  
Entire Job

**Substantial Completion Date**

, subject to adjustments of this Contract Time as provided in the Contract Documents.  
*(Insert provisions, if any, for liquidated damages relating to failure to achieve Substantial Completion on time or for bonus payments for early completion of the Work.)*

#### **ARTICLE 4 CONTRACT SUM**

§ 4.1 The Owner shall pay the Contractor the Contract Sum in current funds for the Contractor's performance of the Contract. The Contract Sum shall be (\$ ), subject to additions and deductions as provided in the Contract Documents.

§ 4.2 The Contract Sum is based upon the following alternates, if any, which are described in the Contract Documents and are hereby accepted by the Owner:  
*(State the numbers or other identification of accepted alternates. If the bidding or proposal documents permit the Owner to accept other alternates subsequent to the execution of this Agreement, attach a schedule of such other alternates showing the amount for each and the date when that amount expires.)*

§ 4.3 Unit prices, if any: Form of Proposal as set forth in Exhibit A  
*(Identify and state the unit price; state quantity limitations, if any, to which the unit price will be applicable.)*

| Item | Units and Limitations | Price Per Unit (\$0.00) |
|------|-----------------------|-------------------------|
|------|-----------------------|-------------------------|

§ 4.4 Allowances included in the Contract Sum, if any: Form of Proposal as set forth in Exhibit A  
*(Identify allowance and state exclusions, if any, from the allowance price.)*

| Item | Price |
|------|-------|
|------|-------|

#### **ARTICLE 5 PAYMENTS**

##### **§ 5.1 PROGRESS PAYMENTS**

§ 5.1.1 Based upon Applications for Payment submitted to the Architect by the Contractor and Certificates for Payment issued by the Architect, the Owner shall make progress payments on account of the Contract Sum to the Contractor as provided below and elsewhere in the Contract Documents.

§ 5.1.2 The period covered by each Application for Payment shall be one calendar month ending on the last day of the month, or as follows:

§ 5.1.3 Provided that an Application for Payment is received by the Architect not later than the First day of a month, the Owner shall make payment of the certified amount to the Contractor not later than the Thirtieth day of the same month. If an Application for Payment is received by the Architect after the application date fixed above, payment shall be made by the Owner not later than Thirty ( 30 ) days after the Architect receives the Application for Payment.  
*(Federal, state or local laws may require payment within a certain period of time.)*

§ 5.1.4 Each Application for Payment shall be based on the most recent schedule of values submitted by the Contractor in accordance with the Contract Documents. The schedule of values shall allocate the entire Contract Sum among the various portions of the Work. The schedule of values shall be prepared in such form and supported

by such data to substantiate its accuracy as the Architect may require. This schedule, unless objected to by the Architect, shall be used as a basis for reviewing the Contractor's Applications for Payment.

§ 5.1.5 Applications for Payment shall show the percentage of completion of each portion of the Work as of the end of the period covered by the Application for Payment.

§ 5.1.6 Subject to other provisions of the Contract Documents, the amount of each progress payment shall be computed as follows:

- .1 Take that portion of the Contract Sum properly allocable to completed Work as determined by multiplying the percentage completion of each portion of the Work by the share of the Contract Sum allocated to that portion of the Work in the schedule of values, less retainage of Five percent ( 5.00 %). Pending final determination of cost to the Owner of changes in the Work, amounts not in dispute shall be included as provided in Section 7.3.9 of AIA Document A201™-2007, General Conditions of the Contract for Construction;
- .2 Add that portion of the Contract Sum properly allocable to materials and equipment delivered and suitably stored at the site for subsequent incorporation in the completed construction (or, if approved in advance by the Owner, suitably stored off the site at a location agreed upon in writing), less retainage of Five percent ( 5.00 %);
- .3 Subtract the aggregate of previous payments made by the Owner; and
- .4 Subtract amounts, if any, for which the Architect has withheld or nullified a Certificate for Payment as provided in Section 9.5 of AIA Document A201-2007.

§ 5.1.7 The progress payment amount determined in accordance with Section 5.1.6 shall be further modified under the following circumstances:

- .1 Add, upon Substantial Completion of the Work, a sum sufficient to increase the total payments to the full amount of the Contract Sum, less such amounts as the Architect shall determine for incomplete Work, retainage applicable to such work and unsettled claims; and  
*(Section 9.8.5 of AIA Document A201-2007 requires release of applicable retainage upon Substantial Completion of Work with consent of surety, if any.)*
- .2 Add, if final completion of the Work is thereafter materially delayed through no fault of the Contractor, any additional amounts payable in accordance with Section 9.10.3 of AIA Document A201-2007.

§ 5.1.8 Reduction or limitation of retainage, if any, shall be as follows:

*(If it is intended, prior to Substantial Completion of the entire Work, to reduce or limit the retainage resulting from the percentages inserted in Sections 5.1.6.1 and 5.1.6.2 above, and this is not explained elsewhere in the Contract Documents, insert here provisions for such reduction or limitation.)*

§ 5.1.9 Except with the Owner's prior approval, the Contractor shall not make advance payments to suppliers for materials or equipment which have not been delivered and stored at the site.

## § 5.2 FINAL PAYMENT

§ 5.2.1 Final payment, constituting the entire unpaid balance of the Contract Sum, shall be made by the Owner to the Contractor when

- .1 the Contractor has fully performed the Contract except for the Contractor's responsibility to correct Work as provided in Section 12.2.2 of AIA Document A201-2007, and to satisfy other requirements, if any, which extend beyond final payment; and
- .2 a final Certificate for Payment has been issued by the Architect.

§ 5.2.2 The Owner's final payment to the Contractor shall be made no later than 30 days after the issuance of the Architect's final Certificate for Payment, or as follows:

**ARTICLE 6 DISPUTE RESOLUTION**

**§ 6.1 INITIAL DECISION MAKER**

The Architect will serve as Initial Decision Maker pursuant to Section 15.2 of AIA Document A201-2007, unless the parties appoint below another individual, not a party to this Agreement, to serve as Initial Decision Maker. *(If the parties mutually agree, insert the name, address and other contact information of the Initial Decision Maker, if other than the Architect.)*

**§ 6.2 BINDING DISPUTE RESOLUTION**

For any Claim subject to, but not resolved by, mediation pursuant to Section 15.3 of AIA Document A201-2007, the method of binding dispute resolution shall be as follows:

*(Check the appropriate box. If the Owner and Contractor do not select a method of binding dispute resolution below, or do not subsequently agree in writing to a binding dispute resolution method other than litigation, Claims will be resolved by litigation in a court of competent jurisdiction.)*

- Arbitration pursuant to Section 15.4 of AIA Document A201-2007
- Litigation in a court of competent jurisdiction
- Other *(Specify) Refer to Section 15.3 Mediation of AIA Document A201-2007*

**ARTICLE 7 TERMINATION OR SUSPENSION**

**§ 7.1** The Contract may be terminated by the Owner or the Contractor as provided in Article 14 of AIA Document A201-2007.

**§ 7.2** The Work may be suspended by the Owner as provided in Article 14 of AIA Document A201-2007.

**ARTICLE 8 MISCELLANEOUS PROVISIONS**

**§ 8.1** Where reference is made in this Agreement to a provision of AIA Document A201-2007 or another Contract Document, the reference refers to that provision as amended or supplemented by other provisions of the Contract Documents.

**§ 8.2** Payments due and unpaid under the Contract shall bear interest from the date payment is due at the rate stated below, or in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.

*(Insert rate of interest agreed upon, if any.)*

%

**§ 8.3** The Owner's representative:  
*(Name, address and other information)*

Robert Butler, Business Manager & Controller c/o Wendy Hozer, Purchasing Agent – Purchasing Office  
Naugatuck Town Hall  
229 Church Street  
Naugatuck, CT 06770  
Telephone Number: 203-720-2500  
Fax Number: 203-720-7031

§ 8.4 The Contractor's representative:  
(Name, address and other information)

§ 8.5 Neither the Owner's nor the Contractor's representative shall be changed without ten days written notice to the other party.

§ 8.6 Other provisions:

#### ARTICLE 9 ENUMERATION OF CONTRACT DOCUMENTS

§ 9.1 The Contract Documents, except for Modifications issued after execution of this Agreement, are enumerated in the sections below.

§ 9.1.1 The Agreement is this executed AIA Document A101-2007, Standard Form of Agreement Between Owner and Contractor.

§ 9.1.2 The General Conditions are AIA Document A201-2007, General Conditions of the Contract for Construction.

§ 9.1.3 The Supplementary and other Conditions of the Contract:

| Document | Title | Date | Pages |
|----------|-------|------|-------|
|----------|-------|------|-------|

§ 9.1.4 The Specifications:  
(Either list the Specifications here or refer to an exhibit attached to this Agreement.)

Title of Specification exhibit: Table of Contents – as set forth in Exhibit B

| Section | Title | Date | Pages |
|---------|-------|------|-------|
|---------|-------|------|-------|

§ 9.1.5 The Drawings:  
(Either list the Drawings here or refer to an exhibit attached to this Agreement.)

Title of Drawings exhibit: List of Drawings – as set forth in Exhibit C

| Number | Title | Date |
|--------|-------|------|
|--------|-------|------|

§ 9.1.6 The Addenda, if any:

| Number | Date | Pages |
|--------|------|-------|
|--------|------|-------|

Portions of Addenda relating to bidding requirements are not part of the Contract Documents unless the bidding requirements are also enumerated in this Article 9.

§ 9.1.7 Additional documents, if any, forming part of the Contract Documents:

- .1 AIA Document E201™-2007, Digital Data Protocol Exhibit, if completed by the parties, or the following:



**.2 Other documents, if any, listed below:**

*(List here any additional documents that are intended to form part of the Contract Documents. AIA Document A201-2007 provides that bidding requirements such as advertisement or invitation to bid, Instructions to Bidders, sample forms and the Contractor's bid are not part of the Contract Documents unless enumerated in this Agreement. They should be listed here only if intended to be part of the Contract Documents.)*

Bid Proposal – submitted by \_\_\_\_\_ as set forth in Exhibit A  
All Documents Enumerated in the Table of Contents – contained in the Project Manual as set forth in Exhibit B  
List of Drawings – contained in the Project Manual as set forth in Exhibit C  
Performance, Labor and Material Payment Bond – submitted by \_\_\_\_\_ as set forth by Exhibit D  
Certificate of Insurance – submitted by \_\_\_\_\_ as set forth by Exhibit E  
AIA Document A701 and the Invitation to Bid – contained in the Project Manual as set forth in Exhibit F

**ARTICLE 10 INSURANCE AND BONDS**

The Contractor shall purchase and maintain insurance and provide bonds as set forth in Article 11 of AIA Document A201-2007.

*(State bonding requirements, if any, and limits of liability for insurance required in Article 11 of AIA Document A201-2007.)*

**Type of insurance or bond**  
See Exhibits D & E

**Limit of liability and bond amount**  
See Exhibits D & E

This Agreement entered into as of the day and year first written above.

\_\_\_\_\_  
**OWNER** *(Signature)*

Robert Neth, Building Committee Chair  
\_\_\_\_\_  
*(Printed name and title)*

\_\_\_\_\_  
**CONTRACTOR** *(Signature)*

\_\_\_\_\_  
*(Printed name and title)*

Init.

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**



**AIA**<sup>®</sup>

# Document A201<sup>™</sup> – 2007

## General Conditions of the Contract for Construction

**for the following PROJECT:**

*(Name and location or address)*

Naugatuck High School – Parking Lot Expansion & Related Site Improvements  
543 Rubber Avenue  
Naugatuck, CT 06770

**THE OWNER:**

*(Name and address)*

Borough of Naugatuck  
229 Church Street  
Naugatuck, CT 06770

**THE ARCHITECT:**

*(Name and address)*

Kaestle Boos Associates, Inc.  
416 Slater Road  
New Britain, CT 06050

**ADDITIONS AND DELETIONS:**

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

**TABLE OF ARTICLES**

- 1      **GENERAL PROVISIONS**
- 2      **OWNER**
- 3      **CONTRACTOR**
- 4      **ARCHITECT**
- 5      **SUBCONTRACTORS**
- 6      **CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS**
- 7      **CHANGES IN THE WORK**
- 8      **TIME**
- 9      **PAYMENTS AND COMPLETION**
- 10     **PROTECTION OF PERSONS AND PROPERTY**
- 11     **INSURANCE AND BONDS**
- 12     **UNCOVERING AND CORRECTION OF WORK**
- 13     **MISCELLANEOUS PROVISIONS**

Init.

AIA Document A201<sup>™</sup> – 2007. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997 and 2007 by The American Institute of Architects. All rights reserved. WARNING: This AIA<sup>®</sup> Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA<sup>®</sup> Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law. This document was produced by AIA software at 16:15:32 on 01/26/2017 under Order No.5992967110\_1 which expires on 04/03/2017, and is not for resale.

User Notes:

(1295081776)

14      **TERMINATION OR SUSPENSION OF THE CONTRACT**

15      **CLAIMS AND DISPUTES**

Init.

## INDEX

(Numbers and Topics in Bold are Section Headings)

### Acceptance of Nonconforming Work

9.6.6, 9.9.3, 12.3

### Acceptance of Work

9.6.6, 9.8.2, 9.9.3, 9.10.1, 9.10.3, 12.3

### Access to Work

**3.16**, 6.2.1, 12.1

### Accident Prevention

10

### Acts and Omissions

3.2, 3.3.2, 3.12.8, 3.18, 4.2.3, 8.3.1, 9.5.1, 10.2.5, 10.2.8, 13.4.2, 13.7.1, 14.1, 15.2

### Addenda

1.1.1.1, 3.11.1

### Additional Costs, Claims for

3.7.4, 3.7.5, 6.1.1, 7.3.7.5, 10.3, 15.1.4

### Additional Inspections and Testing

9.4.2, 9.8.3, 12.2.1, 13.5

### Additional Insured

11.1.4

### Additional Time, Claims for

3.2.4, 3.7.4, 3.7.5, 3.10.2, 8.3.2, **15.1.5**

### Administration of the Contract

3.1.3, 4.2, 9.4, 9.5

### Advertisement or Invitation to Bid

1.1.1

### Aesthetic Effect

4.2.13

### Allowances

**3.8**, 7.3.8

### All-risk Insurance

11.3.1, 11.3.1.1

### Applications for Payment

4.2.5, 7.3.9, 9.2, 9.3, 9.4, 9.5.1, 9.6.3, 9.7.1, 9.10, 11.1.3

### Approvals

2.1.1, 2.2.2, 2.4, 3.1.3, 3.10.2, 3.12.8, 3.12.9, 3.12.10, 4.2.7, 9.3.2, 13.5.1

### Arbitration

8.3.1, 11.3.10, 13.1.1, 15.3.2, 15.4

## ARCHITECT

4

### Architect, Definition of

**4.1.1**

### Architect, Extent of Authority

2.4.1, 3.12.7, 4.1, 4.2, 5.2, 6.3.1, 7.1.2, 7.3.7, 7.4, 9.2.1, 9.3.1, 9.4, 9.5, 9.6.3, 9.8, 9.10.1, 9.10.3, 12.1, 12.2.1, 13.5.1, 13.5.2, 14.2.2, 14.2.4, 15.1.3, 15.2.1

### Architect, Limitations of Authority and

### Responsibility

2.1.1, 3.12.4, 3.12.8, 3.12.10, 4.1.2, 4.2.1, 4.2.2, 4.2.3, 4.2.6, 4.2.7, 4.2.10, 4.2.12, 4.2.13, 5.2.1, 7.4.1, 9.4.2, 9.5.3, 9.6.4, 15.1.3, 15.2

### Architect's Additional Services and Expenses

2.4.1, 11.3.1.1, 12.2.1, 13.5.2, 13.5.3, 14.2.4

### Architect's Administration of the Contract

3.1.3, **4.2**, 3.7.4, 15.2, 9.4.1, 9.5

### Architect's Approvals

2.4.1, 3.1.3, 3.5.1, 3.10.2, 4.2.7

### Architect's Authority to Reject Work

3.5.1, 4.2.6, 12.1.2, 12.2.1

### Architect's Copyright

1.1.7, 1.5

### Architect's Decisions

3.7.4, 4.2.6, 4.2.7, 4.2.11, 4.2.12, 4.2.13, 4.2.14, 6.3.1, 7.3.7, 7.3.9, 8.1.3, 8.3.1, 9.2.1, 9.4.1, 9.5, 9.8.4, 9.9.1, 13.5.2, 15.2, 15.3

### Architect's Inspections

3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.8.3, 9.9.2, 9.10.1, 13.5

### Architect's Instructions

3.2.4, 3.3.1, 4.2.6, 4.2.7, 13.5.2

### Architect's Interpretations

4.2.11, 4.2.12

### Architect's Project Representative

4.2.10

### Architect's Relationship with Contractor

1.1.2, 1.5, 3.1.3, 3.2.2, 3.2.3, 3.2.4, 3.3.1, 3.4.2, 3.5.1, 3.7.4, 3.7.5, 3.9.2, 3.9.3, 3.10, 3.11, 3.12, 3.16, 3.18, 4.1.2, 4.1.3, 4.2, 5.2, 6.2.2, 7, 8.3.1, 9.2, 9.3, 9.4, 9.5, 9.7, 9.8, 9.9, 10.2.6, 10.3, 11.3.7, 12, 13.4.2, 13.5, 15.2

### Architect's Relationship with Subcontractors

1.1.2, 4.2.3, 4.2.4, 4.2.6, 9.6.3, 9.6.4, 11.3.7

### Architect's Representations

9.4.2, 9.5.1, 9.10.1

### Architect's Site Visits

3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.5.1, 9.9.2, 9.10.1, 13.5

### Asbestos

10.3.1

### Attorneys' Fees

3.18.1, 9.10.2, 10.3.3

### Award of Separate Contracts

6.1.1, 6.1.2

### Award of Subcontracts and Other Contracts for Portions of the Work

**5.2**

## Basic Definitions

**1.1**

### Bidding Requirements

1.1.1, 5.2.1, 11.4.1

### Binding Dispute Resolution

9.7.1, 11.3.9, 11.3.10, 13.1.1, 15.2.5, 15.2.6.1, 15.3.1, 15.3.2, 15.4.1

### Boiler and Machinery Insurance

11.3.2

### Bonds, Lien

7.3.7.4, 9.10.2, 9.10.3

### Bonds, Performance, and Payment

7.3.7.4, 9.6.7, 9.10.3, 11.3.9, **11.4**

Init.

AIA Document A201™ – 2007. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997 and 2007 by The American Institute of Architects. All rights reserved. **WARNING:** This AIA® Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA® Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law. This document was produced by AIA software at 16:15:32 on 01/26/2017 under Order No.5992967110\_1 which expires on 04/03/2017, and is not for resale.

User Notes:

(1295081776)

Building Permit

3.7.1

## Capitalization

### 1.3

Certificate of Substantial Completion

9.8.3, 9.8.4, 9.8.5

### Certificates for Payment

4.2.1, 4.2.5, 4.2.9, 9.3.3, 9.4, 9.5, 9.6.1, 9.6.6, 9.7.1,

9.10.1, 9.10.3, 14.1.1.3, 14.2.4, 15.1.3

Certificates of Inspection, Testing or Approval

13.5.4

Certificates of Insurance

9.10.2, 11.1.3

### Change Orders

1.1.1, 2.4.1, 3.4.2, 3.7.4, 3.8.2.3, 3.11.1, 3.12.8, 4.2.8,

5.2.3, 7.1.2, 7.1.3, 7.2, 7.3.2, 7.3.6, 7.3.9, 7.3.10,

8.3.1, 9.3.1.1, 9.10.3, 10.3.2, 11.3.1.2, 11.3.4, 11.3.9,

12.1.2, 15.1.3

Change Orders, Definition of

7.2.1

## CHANGES IN THE WORK

2.2.1, 3.11, 4.2.8, 7, 7.2.1, 7.3.1, 7.4, 7.4.1, 8.3.1,

9.3.1.1, 11.3.9

Claims, Definition of

15.1.1

## CLAIMS AND DISPUTES

3.2.4, 6.1.1, 6.3.1, 7.3.9, 9.3.3, 9.10.4, 10.3.3, 15,

15.4

Claims and Timely Assertion of Claims

15.4.1

Claims for Additional Cost

3.2.4, 3.7.4, 6.1.1, 7.3.9, 10.3.2, 15.1.4

Claims for Additional Time

3.2.4, 3.7.4.6.1.1, 8.3.2, 10.3.2, 15.1.5

Concealed or Unknown Conditions, Claims for

3.7.4

Claims for Damages

3.2.4, 3.18, 6.1.1, 8.3.3, 9.5.1, 9.6.7, 10.3.3, 11.1.1,

11.3.5, 11.3.7, 14.1.3, 14.2.4, 15.1.6

Claims Subject to Arbitration

15.3.1, 15.4.1

### Cleaning Up

3.15, 6.3

Commencement of the Work, Conditions Relating to

2.2.1, 3.2.2, 3.4.1, 3.7.1, 3.10.1, 3.12.6, 5.2.1, 5.2.3,

6.2.2, 8.1.2, 8.2.2, 8.3.1, 11.1, 11.3.1, 11.3.6, 11.4.1,

15.1.4

Commencement of the Work, Definition of

8.1.2

Communications Facilitating Contract

Administration

3.9.1, 4.2.4

Completion, Conditions Relating to

3.4.1, 3.11, 3.15, 4.2.2, 4.2.9, 8.2, 9.4.2, 9.8, 9.9.1,

9.10, 12.2, 13.7, 14.1.2

## COMPLETION, PAYMENTS AND

9

Completion, Substantial

4.2.9, 8.1.1, 8.1.3, 8.2.3, 9.4.2, 9.8, 9.9.1, 9.10.3,

12.2, 13.7

Compliance with Laws

1.6.1, 3.2.3, 3.6, 3.7, 3.12.10, 3.13, 4.1.1, 9.6.4,

10.2.2, 11.1, 11.3, 13.1, 13.4, 13.5.1, 13.5.2, 13.6,

14.1.1, 14.2.1.3, 15.2.8, 15.4.2, 15.4.3

Concealed or Unknown Conditions

3.7.4, 4.2.8, 8.3.1, 10.3

Conditions of the Contract

1.1.1, 6.1.1, 6.1.4

Consent, Written

3.4.2, 3.7.4, 3.12.8, 3.14.2, 4.1.2, 9.3.2, 9.8.5, 9.9.1,

9.10.2, 9.10.3, 11.3.1, 13.2, 13.4.2, 15.4.4.2

Consolidation or Joinder

15.4.4

## CONSTRUCTION BY OWNER OR BY

## SEPARATE CONTRACTORS

1.1.4, 6

Construction Change Directive, Definition of

7.3.1

Construction Change Directives

1.1.1, 3.4.2, 3.12.8, 4.2.8, 7.1.1, 7.1.2, 7.1.3, 7.3,

9.3.1.1

Construction Schedules, Contractor's

3.10, 3.12.1, 3.12.2, 6.1.3, 15.1.5.2

Contingent Assignment of Subcontracts

5.4, 14.2.2.2

Continuing Contract Performance

15.1.3

Contract, Definition of

1.1.2

## CONTRACT, TERMINATION OR

## SUSPENSION OF THE

5.4.1.1, 11.3.9, 14

Contract Administration

3.1.3, 4, 9.4, 9.5

Contract Award and Execution, Conditions Relating

to

3.7.1, 3.10, 5.2, 6.1, 11.1.3, 11.3.6, 11.4.1

Contract Documents, The

1.1.1

Contract Documents, Copies Furnished and Use of

1.5.2, 2.2.5, 5.3

Contract Documents, Definition of

1.1.1

Contract Sum

3.7.4, 3.8, 5.2.3, 7.2, 7.3, 7.4, 9.1, 9.4.2, 9.5.1.4,

9.6.7, 9.7, 10.3.2, 11.3.1, 14.2.4, 14.3.2, 15.1.4,

15.2.5

Contract Sum, Definition of

9.1

Contract Time

3.7.4, 3.7.5, 3.10.2, 5.2.3, 7.2.1.3, 7.3.1, 7.3.5, 7.4,

8.1.1, 8.2.1, 8.3.1, 9.5.1, 9.7.1, 10.3.2, 12.1.1, 14.3.2,

15.1.5.1, 15.2.5

Contract Time, Definition of

Init.

## 8.1.1

### CONTRACTOR

#### 3

Contractor, Definition of

#### 3.1, 6.1.2

#### Contractor's Construction Schedules

3.10, 3.12.1, 3.12.2, 6.1.3, 15.1.5.2

Contractor's Employees

3.3.2, 3.4.3, 3.8.1, 3.9, 3.18.2, 4.2.3, 4.2.6, 10.2, 10.3, 11.1.1, 11.3.7, 14.1, 14.2.1.1,

#### Contractor's Liability Insurance

#### 11.1

Contractor's Relationship with Separate Contractors and Owner's Forces

3.12.5, 3.14.2, 4.2.4, 6, 11.3.7, 12.1.2, 12.2.4

Contractor's Relationship with Subcontractors

1.2.2, 3.3.2, 3.18.1, 3.18.2, 5, 9.6.2, 9.6.7, 9.10.2, 11.3.1.2, 11.3.7, 11.3.8

Contractor's Relationship with the Architect

1.1.2, 1.5, 3.1.3, 3.2.2, 3.2.3, 3.2.4, 3.3.1, 3.4.2, 3.5.1, 3.7.4, 3.10, 3.11, 3.12, 3.16, 3.18, 4.1.3, 4.2, 5.2, 6.2.2, 7, 8.3.1, 9.2, 9.3, 9.4, 9.5, 9.7, 9.8, 9.9, 10.2.6, 10.3, 11.3.7, 12, 13.5, 15.1.2, 15.2.1

Contractor's Representations

3.2.1, 3.2.2, 3.5.1, 3.12.6, 6.2.2, 8.2.1, 9.3.3, 9.8.2

Contractor's Responsibility for Those Performing the Work

3.3.2, 3.18, 5.3.1, 6.1.3, 6.2, 9.5.1, 10.2.8

Contractor's Review of Contract Documents

3.2

Contractor's Right to Stop the Work

9.7

Contractor's Right to Terminate the Contract

14.1, 15.1.6

Contractor's Submittals

3.10, 3.11, 3.12.4, 4.2.7, 5.2.1, 5.2.3, 9.2, 9.3, 9.8.2, 9.8.3, 9.9.1, 9.10.2, 9.10.3, 11.1.3, 11.4.2

Contractor's Superintendent

3.9, 10.2.6

Contractor's Supervision and Construction

Procedures

1.2.2, 3.3, 3.4, 3.12.10, 4.2.2, 4.2.7, 6.1.3, 6.2.4, 7.1.3, 7.3.5, 7.3.7, 8.2, 10, 12, 14, 15.1.3

Contractual Liability Insurance

11.1.1.8, 11.2

Coordination and Correlation

1.2, 3.2.1, 3.3.1, 3.10, 3.12.6, 6.1.3, 6.2.1

Copies Furnished of Drawings and Specifications

1.5, 2.2.5, 3.11

Copyrights

1.5, 3.17

Correction of Work

2.3, 2.4, 3.7.3, 9.4.2, 9.8.2, 9.8.3, 9.9.1, 12.1.2, 12.2

#### Correlation and Intent of the Contract Documents

#### 1.2

Cost, Definition of

7.3.7

#### Costs

2.4.1, 3.2.4, 3.7.3, 3.8.2, 3.15.2, 5.4.2, 6.1.1, 6.2.3, 7.3.3.3, 7.3.7, 7.3.8, 7.3.9, 9.10.2, 10.3.2, 10.3.6, 11.3, 12.1.2, 12.2.1, 12.2.4, 13.5, 14

#### Cutting and Patching

3.14, 6.2.5

Damage to Construction of Owner or Separate Contractors

3.14.2, 6.2.4, 10.2.1.2, 10.2.5, 10.4, 11.1.1, 11.3, 12.2.4

Damage to the Work

3.14.2, 9.9.1, 10.2.1.2, 10.2.5, 10.4.1, 11.3.1, 12.2.4

Damages, Claims for

3.2.4, 3.18, 6.1.1, 8.3.3, 9.5.1, 9.6.7, 10.3.3, 11.1.1, 11.3.5, 11.3.7, 14.1.3, 14.2.4, 15.1.6

Damages for Delay

6.1.1, 8.3.3, 9.5.1.6, 9.7, 10.3.2

Date of Commencement of the Work, Definition of

#### 8.1.2

Date of Substantial Completion, Definition of

#### 8.1.3

Day, Definition of

#### 8.1.4

Decisions of the Architect

3.7.4, 4.2.6, 4.2.7, 4.2.11, 4.2.12, 4.2.13, 15.2, 6.3, 7.3.7, 7.3.9, 8.1.3, 8.3.1, 9.2.1, 9.4, 9.5.1, 9.8.4, 9.9.1, 13.5.2, 14.2.2, 14.2.4, 15.1, 15.2

#### Decisions to Withhold Certification

9.4.1, 9.5, 9.7, 14.1.1.3

Defective or Nonconforming Work, Acceptance, Rejection and Correction of

2.3.1, 2.4.1, 3.5.1, 4.2.6, 6.2.5, 9.5.1, 9.5.2, 9.6.6, 9.8.2, 9.9.3, 9.10.4, 12.2.1

Defective Work, Definition of

#### 3.5.1

Definitions

1.1, 2.1.1, 3.1.1, 3.5.1, 3.12.1, 3.12.2, 3.12.3, 4.1.1, 15.1.1, 5.1, 6.1.2, 7.2.1, 7.3.1, 8.1, 9.1, 9.8.1

#### Delays and Extensions of Time

3.2., 3.7.4, 5.2.3, 7.2.1, 7.3.1, 7.4.1, 8.3, 9.5.1, 9.7.1, 10.3.2, 10.4.1, 14.3.2, 15.1.5, 15.2.5

Disputes

6.3.1, 7.3.9, 15.1, 15.2

#### Documents and Samples at the Site

#### 3.11

Drawings, Definition of

#### 1.1.5

Drawings and Specifications, Use and Ownership of

3.11

Effective Date of Insurance

8.2.2, 11.1.2

#### Emergencies

10.4, 14.1.1.2, 15.1.4

Employees, Contractor's

3.3.2, 3.4.3, 3.8.1, 3.9, 3.18.2, 4.2.3, 4.2.6, 10.2, 10.3.3, 11.1.1, 11.3.7, 14.1, 14.2.1.1

Equipment, Labor, Materials or

Init.

1.1.3, 1.1.6, 3.4, 3.5.1, 3.8.2, 3.8.3, 3.12, 3.13.1, 3.15.1, 4.2.6, 4.2.7, 5.2.1, 6.2.1, 7.3.7, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1, 10.2.4, 14.2.1.1, 14.2.1.2  
 Execution and Progress of the Work  
 1.1.3, 1.2.1, 1.2.2, 2.2.3, 2.2.5, 3.1, 3.3.1, 3.4.1, 3.5.1, 3.7.1, 3.10.1, 3.12, 3.14, 4.2, 6.2.2, 7.1.3, 7.3.5, 8.2, 9.5.1, 9.9.1, 10.2, 10.3, 12.2, 14.2, 14.3.1, 15.1.3  
 Extensions of Time  
 3.2.4, 3.7.4, 5.2.3, 7.2.1, 7.3, 7.4.1, 9.5.1, 9.7.1, 10.3.2, 10.4.1, 14.3, 15.1.5, **15.2.5**  
**Failure of Payment**  
 9.5.1.3, 9.7, 9.10.2, 13.6, 14.1.1.3, 14.2.1.2  
 Faulty Work  
 (See Defective or Nonconforming Work)  
**Final Completion and Final Payment**  
 4.2.1, 4.2.9, 9.8.2, 9.10, 11.1.2, 11.1.3, 11.3.1, 11.3.5, 12.3.1, 14.2.4, 14.4.3

Financial Arrangements, Owner's  
 2.2.1, 13.2.2, 14.1.1.4  
 Fire and Extended Coverage Insurance  
 11.3.1.1

**GENERAL PROVISIONS**

**1**

**Governing Law**

**13.1**

Guarantees (See Warranty)

**Hazardous Materials**

10.2.4, 10.3

Identification of Subcontractors and Suppliers  
 5.2.1

**Indemnification**

3.17.1, 3.18, 9.10.2, 10.3.3, 10.3.5, 10.3.6, 11.3.1.2, 11.3.7

**Information and Services Required of the Owner**

2.1.2, 2.2, 3.2.2, 3.12.4, 3.12.10, 6.1.3, 6.1.4, 6.2.5, 9.6.1, 9.6.4, 9.9.2, 9.10.3, 10.3.3, 11.2.1, 11.4, 13.5.1, 13.5.2, 14.1.1.4, 14.1.4, 15.1.3

**Initial Decision**

**15.2**

**Initial Decision Maker, Definition of**

1.1.8

Initial Decision Maker, Decisions

14.2.2, 14.2.4, 15.2.1, 15.2.2, 15.2.3, 15.2.4, 15.2.5

Initial Decision Maker, Extent of Authority

14.2.2, 14.2.4, 15.1.3, 15.2.1, 15.2.2, 15.2.3, 15.2.4, 15.2.5

**Injury or Damage to Person or Property**

**10.2.8, 10.4.1**

Inspections

3.1.3, 3.3.3, 3.7.1, 4.2.2, 4.2.6, 4.2.9, 9.4.2, 9.8.3, 9.9.2, 9.10.1, 12.2.1, 13.5

Instructions to Bidders

1.1.1

Instructions to the Contractor

3.2.4, 3.3.1, 3.8.1, 5.2.1, 7, 8.2.2, 12, 13.5.2

**Instruments of Service, Definition of**

**1.1.7**

**Insurance**

3.18.1, 6.1.1, 7.3.7, 9.3.2, 9.8.4, 9.9.1, 9.10.2, 11

**Insurance, Boiler and Machinery**

**11.3.2**

**Insurance, Contractor's Liability**

**11.1**

Insurance, Effective Date of  
 8.2.2, 11.1.2

**Insurance, Loss of Use**

**11.3.3**

**Insurance, Owner's Liability**

**11.2**

**Insurance, Property**

10.2.5, 11.3

Insurance, Stored Materials

9.3.2, 11.4.1.4

**INSURANCE AND BONDS**

**11**

Insurance Companies, Consent to Partial Occupancy  
 9.9.1, 11.4.1.5

Insurance Companies, Settlement with  
 11.4.10

Intent of the Contract Documents

1.2.1, 4.2.7, 4.2.12, 4.2.13, 7.4

**Interest**

**13.6**

**Interpretation**

1.2.3, 1.4, 4.1.1, 5.1, 6.1.2, 15.1.1

Interpretations, Written

4.2.11, 4.2.12, 15.1.4

Judgment on Final Award

15.4.2

**Labor and Materials, Equipment**

1.1.3, 1.1.6, 3.4, 3.5.1, 3.8.2, 3.8.3, 3.12, 3.13, 3.15.1, 4.2.6, 4.2.7, 5.2.1, 6.2.1, 7.3.7, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1, 10.2.4, 14.2.1.1, 14.2.1.2

Labor Disputes

8.3.1

Laws and Regulations

1.5, 3.2.3, 3.6, 3.7, 3.12.10, 3.13.1, 4.1.1, 9.6.4, 9.9.1, 10.2.2, 11.1.1, 11.3, 13.1.1, 13.4, 13.5.1, 13.5.2, 13.6.1, 14, 15.2.8, 15.4

Liens

2.1.2, 9.3.3, 9.10.2, 9.10.4, 15.2.8

Limitations, Statutes of

12.2.5, 13.7, 15.4.1.1

Limitations of Liability

2.3.1, 3.2.2, 3.5.1, 3.12.10, 3.17.1, 3.18.1, 4.2.6, 4.2.7, 4.2.12, 6.2.2, 9.4.2, 9.6.4, 9.6.7, 10.2.5, 10.3.3, 11.1.2, 11.2.1, 11.3.7, 12.2.5, 13.4.2

Limitations of Time

2.1.2, 2.2, 2.4, 3.2.2, 3.10, 3.11, 3.12.5, 3.15.1, 4.2.7, 5.2, 5.3.1, 5.4.1, 6.2.4, 7.3, 7.4, 8.2, 9.2.1, 9.3.1, 9.3.3, 9.4.1, 9.5, 9.6, 9.7.1, 9.8, 9.9, 9.10, 11.1.3, 11.3.1.5, 11.3.6, 11.3.10, 12.2, 13.5, 13.7, 14, 15

**Loss of Use Insurance**

**11.3.3**

Init.



Material Suppliers  
1.5, 3.12.1, 4.2.4, 4.2.6, 5.2.1, 9.3, 9.4.2, 9.6, 9.10.5

**Materials, Hazardous**  
10.2.4, 10.3

Materials, Labor, Equipment and  
1.1.3, 1.1.6, 1.5.1, 3.4.1, 3.5.1, 3.8.2, 3.8.3, 3.12,  
3.13.1, 3.15.1, 4.2.6, 4.2.7, 5.2.1, 6.2.1, 7.3.7, 9.3.2,  
9.3.3, 9.5.1.3, 9.10.2, 10.2.1.2, 10.2.4, 14.2.1.1,  
14.2.1.2

Means, Methods, Techniques, Sequences and  
Procedures of Construction  
3.3.1, 3.12.10, 4.2.2, 4.2.7, 9.4.2

Mechanic's Lien  
2.1.2, 15.2.8

**Mediation**  
8.3.1, 10.3.5, 10.3.6, 15.2.1, 15.2.5, 15.2.6, 15.3,  
15.4.1

**Minor Changes in the Work**  
1.1.1, 3.12.8, 4.2.8, 7.1, 7.4

**MISCELLANEOUS PROVISIONS**  
13

**Modifications, Definition of**  
1.1.1

Modifications to the Contract  
1.1.1, 1.1.2, 3.11, 4.1.2, 4.2.1, 5.2.3, 7, 8.3.1, 9.7.1,  
10.3.2, 11.3.1

**Mutual Responsibility**  
6.2

**Nonconforming Work, Acceptance of**  
9.6.6, 9.9.3, 12.3

Nonconforming Work, Rejection and Correction of  
2.3.1, 2.4.1, 3.5.1, 4.2.6, 6.2.4, 9.5.1, 9.8.2, 9.9.3,  
9.10.4, 12.2.1

Notice  
2.2.1, 2.3.1, 2.4.1, 3.2.4, 3.3.1, 3.7.2, 3.12.9, 5.2.1,  
9.7.1, 9.10, 10.2.2, 11.1.3, 11.4.6, 12.2.2.1, 13.3,  
13.5.1, 13.5.2, 14.1, 14.2, 15.2.8, 15.4.1

**Notice, Written**  
2.3.1, 2.4.1, 3.3.1, 3.9.2, 3.12.9, 3.12.10, 5.2.1, 9.7.1,  
9.10, 10.2.2, 10.3, 11.1.3, 11.3.6, 12.2.2.1, 13.3, 14,  
15.2.8, 15.4.1

**Notice of Claims**  
3.7.4, 4.5, 10.2.8, 15.1.2, 15.4

Notice of Testing and Inspections  
13.5.1, 13.5.2

Observations, Contractor's  
3.2, 3.7.4

Occupancy  
2.2.2, 9.6.6, 9.8, 11.3.1.5

Orders, Written  
1.1.1, 2.3, 3.9.2, 7, 8.2.2, 11.3.9, 12.1, 12.2.2.1,  
13.5.2, 14.3.1

**OWNER**  
2

**Owner, Definition of**  
2.1.1

**Owner, Information and Services Required of the**

2.1.2, 2.2, 3.2.2, 3.12.10, 6.1.3, 6.1.4, 6.2.5, 9.3.2,  
9.6.1, 9.6.4, 9.9.2, 9.10.3, 10.3.3, 11.2.1, 11.3, 13.5.1,  
13.5.2, 14.1.1.4, 14.1.4, 15.1.3

**Owner's Authority**  
1.5, 2.1.1, 2.3.1, 2.4.1, 3.4.2, 3.8.1, 3.12.10, 3.14.2,  
4.1.2, 4.1.3, 4.2.4, 4.2.9, 5.2.1, 5.2.4, 5.4.1, 6.1, 6.3.1,  
7.2.1, 7.3.1, 8.2.2, 8.3.1, 9.3.1, 9.3.2, 9.5.1, 9.6.4,  
9.9.1, 9.10.2, 10.3.2, 11.1.3, 11.3.3, 11.3.10, 12.2.2,  
12.3.1, 13.2.2, 14.3, 14.4, 15.2.7

**Owner's Financial Capability**  
2.2.1, 13.2.2, 14.1.1.4

**Owner's Liability Insurance**  
11.2

**Owner's Loss of Use Insurance**  
11.3.3

**Owner's Relationship with Subcontractors**  
1.1.2, 5.2, 5.3, 5.4, 9.6.4, 9.10.2, 14.2.2

**Owner's Right to Carry Out the Work**  
2.4, 14.2.2

**Owner's Right to Clean Up**  
6.3

**Owner's Right to Perform Construction and to Award Separate Contracts**  
6.1

**Owner's Right to Stop the Work**  
2.3

**Owner's Right to Suspend the Work**  
14.3

**Owner's Right to Terminate the Contract**  
14.2

**Ownership and Use of Drawings, Specifications and Other Instruments of Service**  
1.1.1, 1.1.6, 1.1.7, 1.5, 2.2.5, 3.2.2, 3.11.1, 3.17.1,  
4.2.12, 5.3.1

**Partial Occupancy or Use**  
9.6.6, 9.9, 11.3.1.5

**Patching, Cutting and**  
3.14, 6.2.5

Patents  
3.17

**Payment, Applications for**  
4.2.5, 7.3.9, 9.2.1, 9.3, 9.4, 9.5, 9.6.3, 9.7.1, 9.8.5,  
9.10.1, 14.2.3, 14.2.4, 14.4.3

**Payment, Certificates for**  
4.2.5, 4.2.9, 9.3.3, 9.4, 9.5, 9.6.1, 9.6.6, 9.7.1, 9.10.1,  
9.10.3, 13.7, 14.1.1.3, 14.2.4

**Payment, Failure of**  
9.5.1.3, 9.7, 9.10.2, 13.6, 14.1.1.3, 14.2.1.2

**Payment, Final**  
4.2.1, 4.2.9, 9.8.2, 9.10, 11.1.2, 11.1.3, 11.4.1, 11.4.5,  
12.3.1, 13.7, 14.2.4, 14.4.3

**Payment Bond, Performance Bond and**  
7.3.7.4, 9.6.7, 9.10.3, 11.4.9, 11.4

**Payments, Progress**  
9.3, 9.6, 9.8.5, 9.10.3, 13.6, 14.2.3, 15.1.3

**PAYMENTS AND COMPLETION**  
9

Init.

Payments to Subcontractors  
 5.4.2, 9.5.1.3, 9.6.2, 9.6.3, 9.6.4, 9.6.7, 11.4.8,  
 14.2.1.2  
 PCB  
 10.3.1  
**Performance Bond and Payment Bond**  
 7.3.7.4, 9.6.7, 9.10.3, 11.4.9, 11.4  
**Permits, Fees, Notices and Compliance with Laws**  
 2.2.2, 3.7, 3.13, 7.3.7.4, 10.2.2  
**PERSONS AND PROPERTY, PROTECTION**  
**OF**  
**10**  
 Polychlorinated Biphenyl  
 10.3.1  
**Product Data, Definition of**  
**3.12.2**  
**Product Data and Samples, Shop Drawings**  
 3.11, 3.12, 4.2.7  
**Progress and Completion**  
 4.2.2, 8.2, 9.8, 9.9.1, 14.1.4, 15.1.3  
**Progress Payments**  
 9.3, 9.6, 9.8.5, 9.10.3, 13.6, 14.2.3, 15.1.3  
**Project, Definition of the**  
**1.1.4**  
 Project Representatives  
 4.2.10  
**Property Insurance**  
 10.2.5, 11.3  
**PROTECTION OF PERSONS AND PROPERTY**  
**10**  
 Regulations and Laws  
 1.5, 3.2.3, 3.6, 3.7, 3.12.10, 3.13, 4.1.1, 9.6.4, 9.9.1,  
 10.2.2, 11.1, 11.4, 13.1, 13.4, 13.5.1, 13.5.2, 13.6, 14,  
 15.2.8, 15.4  
 Rejection of Work  
 3.5.1, 4.2.6, 12.2.1  
 Releases and Waivers of Liens  
 9.10.2  
 Representations  
 3.2.1, 3.5.1, 3.12.6, 6.2.2, 8.2.1, 9.3.3, 9.4.2, 9.5.1,  
 9.8.2, 9.10.1  
 Representatives  
 2.1.1, 3.1.1, 3.9, 4.1.1, 4.2.1, 4.2.2, 4.2.10, 5.1.1,  
 5.1.2, 13.2.1  
 Responsibility for Those Performing the Work  
 3.3.2, 3.18, 4.2.3, 5.3.1, 6.1.3, 6.2, 6.3, 9.5.1, 10  
 Retainage  
 9.3.1, 9.6.2, 9.8.5, 9.9.1, 9.10.2, 9.10.3  
**Review of Contract Documents and Field**  
**Conditions by Contractor**  
 3.2, 3.12.7, 6.1.3  
 Review of Contractor's Submittals by Owner and  
 Architect  
 3.10.1, 3.10.2, 3.11, 3.12, 4.2, 5.2, 6.1.3, 9.2, 9.8.2  
 Review of Shop Drawings, Product Data and  
 Samples by Contractor  
 3.12

**Rights and Remedies**  
 1.1.2, 2.3, 2.4, 3.5.1, 3.7.4, 3.15.2, 4.2.6, 4.5, 5.3, 5.4,  
 6.1, 6.3, 7.3.1, 8.3, 9.5.1, 9.7, 10.2.5, 10.3, 12.2.2,  
 12.2.4, 13.4, 14, 15.4  
**Royalties, Patents and Copyrights**  
**3.17**  
 Rules and Notices for Arbitration  
 15.4.1  
**Safety of Persons and Property**  
**10.2, 10.4**  
**Safety Precautions and Programs**  
 3.3.1, 4.2.2, 4.2.7, 5.3.1, 10.1, 10.2, 10.4  
**Samples, Definition of**  
**3.12.3**  
**Samples, Shop Drawings, Product Data and**  
 3.11, 3.12, 4.2.7  
**Samples at the Site, Documents and**  
**3.11**  
**Schedule of Values**  
**9.2, 9.3.1**  
 Schedules, Construction  
 1.4.1.2, 3.10, 3.12.1, 3.12.2, 6.1.3, 15.1.5.2  
 Separate Contracts and Contractors  
 1.1.4, 3.12.5, 3.14.2, 4.2.4, 4.2.7, 6, 8.3.1, 11.4.7,  
 12.1.2  
**Shop Drawings, Definition of**  
**3.12.1**  
**Shop Drawings, Product Data and Samples**  
 3.11, 3.12, 4.2.7  
**Site, Use of**  
**3.13, 6.1.1, 6.2.1**  
 Site Inspections  
 3.2.2, 3.3.3, 3.7.1, 3.7.4, 4.2, 9.4.2, 9.10.1, 13.5  
 Site Visits, Architect's  
 3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.5.1, 9.9.2, 9.10.1, 13.5  
 Special Inspections and Testing  
 4.2.6, 12.2.1, 13.5  
**Specifications, Definition of the**  
**1.1.6**  
**Specifications, The**  
 1.1.1, 1.1.6, 1.2.2, 1.5, 3.11, 3.12.10, 3.17, 4.2.14  
 Statute of Limitations  
 13.7, 15.4.1.1  
 Stopping the Work  
 2.3, 9.7, 10.3, 14.1  
 Stored Materials  
 6.2.1, 9.3.2, 10.2.1.2, 10.2.4, 11.4.1.4  
**Subcontractor, Definition of**  
**5.1.1**  
**SUBCONTRACTORS**  
**5**  
 Subcontractors, Work by  
 1.2.2, 3.3.2, 3.12.1, 4.2.3, 5.2.3, 5.3, 5.4, 9.3.1.2,  
 9.6.7  
**Subcontractual Relations**  
**5.3, 5.4, 9.3.1.2, 9.6, 9.10, 10.2.1, 11.4.7, 11.4.8,**  
**14.1, 14.2.1**

Init.

Submittals  
3.10, 3.11, 3.12, 4.2.7, 5.2.1, 5.2.3, 7.3.7, 9.2, 9.3, 9.8, 9.9.1, 9.10.2, 9.10.3, 11.1.3

Submittal Schedule  
3.10.2, 3.12.5, 4.2.7

**Subrogation, Waivers of**  
6.1.1, 11.4.5, 11.3.7

**Substantial Completion**  
4.2.9, 8.1.1, 8.1.3, 8.2.3, 9.4.2, 9.8, 9.9.1, 9.10.3, 12.2, 13.7

**Substantial Completion, Definition of**  
**9.8.1**

Substitution of Subcontractors  
5.2.3, 5.2.4

Substitution of Architect  
4.1.3

Substitutions of Materials  
3.4.2, 3.5.1, 7.3.8

**Sub-subcontractor, Definition of**  
**5.1.2**

Subsurface Conditions  
3.7.4

**Successors and Assigns**  
**13.2**

**Superintendent**  
**3.9, 10.2.6**

**Supervision and Construction Procedures**  
1.2.2, 3.3, 3.4, 3.12.10, 4.2.2, 4.2.7, 6.1.3, 6.2.4, 7.1.3, 7.3.7, 8.2, 8.3.1, 9.4.2, 10, 12, 14, 15.1.3

Surety  
5.4.1.2, 9.8.5, 9.10.2, 9.10.3, 14.2.2, 15.2.7

Surety, Consent of  
9.10.2, 9.10.3

Surveys  
2.2.3

**Suspension by the Owner for Convenience**  
**14.3**

Suspension of the Work  
5.4.2, 14.3

Suspension or Termination of the Contract  
5.4.1.1, 11.4.9, 14

**Taxes**  
3.6, 3.8.2.1, 7.3.7.4

**Termination by the Contractor**  
14.1, **15.1.6**

**Termination by the Owner for Cause**  
5.4.1.1, 14.2, 15.1.6

**Termination by the Owner for Convenience**  
**14.4**

Termination of the Architect  
4.1.3

Termination of the Contractor  
14.2.2

**TERMINATION OR SUSPENSION OF THE CONTRACT**  
**14**

**Tests and Inspections**

3.1.3, 3.3.3, 4.2.2, 4.2.6, 4.2.9, 9.4.2, 9.8.3, 9.9.2, 9.10.1, 10.3.2, 11.4.1.1, 12.2.1, 13.5

**TIME**  
**8**

**Time, Delays and Extensions of**  
3.2.4, 3.7.4, 5.2.3, 7.2.1, 7.3.1, 7.4.1, 8.3, 9.5.1, 9.7.1, 10.3.2, 10.4.1, 14.3.2, 15.1.5, **15.2.5**

Time Limits  
2.1.2, 2.2, 2.4, 3.2.2, 3.10, 3.11, 3.12.5, 3.15.1, 4.2, 4.4, 4.5, 5.2, 5.3, 5.4, 6.2.4, 7.3, 7.4, 8.2, 9.2, 9.3.1, 9.3.3, 9.4.1, 9.5, 9.6, 9.7, 9.8, 9.9, 9.10, 11.1.3, 11.4.1.5, 11.4.6, 11.4.10, 12.2, 13.5, 13.7, 14, 15.1.2, 15.4

**Time Limits on Claims**  
3.7.4, 10.2.8, 13.7, 15.1.2

Title to Work  
9.3.2, 9.3.3

**Transmission of Data in Digital Form**  
**1.6**

**UNCOVERING AND CORRECTION OF WORK**  
**12**

**Uncovering of Work**  
**12.1**

Unforeseen Conditions, Concealed or Unknown  
3.7.4, 8.3.1, 10.3

Unit Prices  
7.3.3.2, 7.3.4

Use of Documents  
1.1.1, 1.5, 2.2.5, 3.12.6, 5.3

**Use of Site**  
**3.13, 6.1.1, 6.2.1**

**Values, Schedule of**  
**9.2, 9.3.1**

Waiver of Claims by the Architect  
13.4.2

Waiver of Claims by the Contractor  
9.10.5, 11.4.7, 13.4.2, **15.1.6**

Waiver of Claims by the Owner  
9.9.3, 9.10.3, 9.10.4, 11.4.3, 11.4.5, 11.4.7, 12.2.2.1, 13.4.2, 14.2.4, **15.1.6**

Waiver of Consequential Damages  
14.2.4, **15.1.6**

Waiver of Liens  
9.10.2, 9.10.4

**Waivers of Subrogation**  
6.1.1, 11.4.5, 11.3.7

**Warranty**  
3.5, 4.2.9, 9.3.3, 9.8.4, 9.9.1, 9.10.4, 12.2.2, 13.7.1

Weather Delays  
15.1.5.2

**Work, Definition of**  
**1.1.3**

Written Consent  
1.5.2, 3.4.2, 3.7.4, 3.12.8, 3.14.2, 4.1.2, 9.3.2, 9.8.5, 9.9.1, 9.10.2, 9.10.3, 11.4.1, 13.2, 13.4.2, 15.4.4.2

Written Interpretations

4.2.11, 4.2.12

Written Notice

2.3, 2.4, 3.3.1, 3.9, 3.12.9, 3.12.10, 5.2.1, 8.2.2, 9.7,  
9.10, 10.2.2, 10.3, 11.1.3, 11.4.6, 12.2.2, 12.2.4, **13.3**,  
14, 15.4.1

Written Orders

1.1.1, 2.3, 3.9, 7, 8.2.2, 11.4.9, 12.1, 12.2, 13.5.2,  
14.3.1, 15.1.2

Init.

## ARTICLE 1 GENERAL PROVISIONS

### § 1.1 BASIC DEFINITIONS

#### § 1.1.1 THE CONTRACT DOCUMENTS

The Contract Documents are enumerated in the Agreement between the Owner and Contractor (hereinafter the Agreement) and consist of the Agreement, Conditions of the Contract (General, Supplementary and other Conditions), Drawings, Specifications, Addenda issued prior to execution of the Contract, other documents listed in the Agreement and Modifications issued after execution of the Contract. A Modification is (1) a written amendment to the Contract signed by both parties, (2) a Change Order, (3) a Construction Change Directive or (4) a written order for a minor change in the Work issued by the Architect.

**§ 1.1.1.1 Owner and Contractor recognizing that other rights, duties and obligations with respect to public construction contracts are also provided by statute, notwithstanding the fact that they are not specifically enumerated herein. Accordingly, any provision required by statute to be included in this Contract shall be deemed to be so included as though fully set forth herein. However, compliance with a statute does not diminish the Contractor's responsibilities hereunder. A reference to some statutes which are applicable to the Project are contained herein and are specifically incorporated by reference as Contract Documents.**

#### § 1.1.2 THE CONTRACT

The Contract Documents form the Contract for Construction. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations or agreements, either written or oral. The Contract may be amended or modified only by a Modification. The Contract Documents shall not be construed to create a contractual relationship of any kind (1) between the Contractor and the Architect or the Architect's consultants, (2) between the Owner and a Subcontractor or a Sub-subcontractor, (3) between the Owner and the Architect or the Architect's consultants. The Architect shall, however, be entitled to performance and enforcement of obligations under the Contract intended to facilitate performance of the Architect's duties.

#### § 1.1.3 THE WORK

The term "Work" means the construction and services required by the Contract Documents, whether completed or partially completed, and includes all other labor, materials, equipment and services provided or to be provided by the Contractor to fulfill the Contractor's obligations. The Work may constitute the whole or a part of the Project.

#### § 1.1.4 THE PROJECT

The Project is the total construction of which the Work performed under the Contract Documents may be the whole or a part and which may include construction by the Owner and by separate contractors.

#### § 1.1.5 THE DRAWINGS

The Drawings are the graphic and pictorial portions of the Contract Documents showing the design, location and dimensions of the Work, generally including plans, elevations, sections, details, schedules and diagrams.

#### § 1.1.6 THE SPECIFICATIONS

The Specifications are that portion of the Contract Documents consisting of the written requirements for materials, equipment, systems, standards and workmanship for the Work, and performance of related services.

#### § 1.1.7 INSTRUMENTS OF SERVICE

Instruments of Service are representations, in any medium of expression now known or later developed, of the tangible and intangible creative work performed by the Architect and the Architect's consultants under their respective professional services agreements. Instruments of Service may include, without limitation, studies, surveys, models, sketches, drawings, specifications, and other similar materials.

#### § 1.1.8 INITIAL DECISION MAKER

The Initial Decision Maker is the **Architect unless there is another** person identified in the Agreement to render initial decisions on Claims in accordance with Section 15.2 and certify termination of the Agreement under Section 14.2.2.

#### § 1.1.9 AWARDING AUTHORITY

**Where the term "Awarding Authority" appears in any statutory provision, it shall mean "the Owner".**

### § 1.1.10 THE PROJECT MANUAL

The Project Manual is a volume assembled for the Work which may include the bidding information, bidding requirements, sample forms, schedules, Conditions of the Contract, Drawings, and Specifications.

### § 1.2 CORRELATION AND INTENT OF THE CONTRACT DOCUMENTS

*(Paragraph deleted)*

§ 1.2.1 The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary, and what is required by one shall be as binding as if required by all; performance by the Contractor shall be required only to the extent consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the indicated results. **All Work mentioned or indicated in the Contract Documents shall be performed by the Contractor as part of the Contract unless it is specifically indicated in the Contract Documents that such Work is to be done by others.**

§ 1.2.1.1 In the event of conflict in or between the Contract Documents, the Contractor shall be held to the higher quality or greater quantity as set forth therein as determined by the Architect.

§ 1.2.2 Organization of the Specifications into divisions, sections and articles, and arrangement of Drawings shall not control the Contractor in dividing the Work among Subcontractors or in establishing the extent of Work to be performed by any trade.

§ 1.2.3 Unless otherwise stated in the Contract Documents, words that have well-known technical or construction industry meanings are used in the Contract Documents in accordance with such recognized meanings.

§ 1.2.4 Test boring and soil test information provided in the Project Manual was obtained by the Owner for use by the Architect in the design of the Project. The Owner does not hold out such information to the Contractor as an accurate or approximate indication of subsurface conditions, and no claim for extra cost or extension of time resulting from the Contractor's reliance upon such information shall be permitted.

### § 1.3 CAPITALIZATION

Terms capitalized in these General Conditions include those that are (1) specifically defined, (2) the titles of numbered articles or (3) the titles of other documents published by the American Institute of Architects.

### § 1.4 INTERPRETATION

In the interest of brevity the Contract Documents frequently omit modifying words such as "all" and "any" and articles such as "the" and "an," but the fact that a modifier or an article is absent from one statement and appears in another is not intended to affect the interpretation of either statement.

### § 1.5 OWNERSHIP AND USE OF DRAWINGS, SPECIFICATIONS AND OTHER INSTRUMENTS OF SERVICE

§ 1.5.1 The Architect and the Architect's consultants shall be deemed the authors and owners of their respective Instruments of Service, including the Drawings and Specifications, and will retain all common law, statutory and other reserved rights, including copyrights. The Contractor, Subcontractors, Sub-subcontractors, and material or equipment suppliers shall not own or claim a copyright in the Instruments of Service. Submittal or distribution to meet official regulatory requirements or for other purposes in connection with this Project is not to be construed as publication in derogation of the Architect's or Architect's consultants' reserved rights.

§ 1.5.2 The Contractor, Subcontractors, Sub-subcontractors and material or equipment suppliers are authorized to use and reproduce the Instruments of Service provided to them solely and exclusively for execution of the Work. All copies made under this authorization shall bear the copyright notice, if any, shown on the Instruments of Service. The Contractor, Subcontractors, Sub-subcontractors, and material or equipment suppliers may not use the Instruments of Service on other projects or for additions to this Project outside the scope of the Work without the specific written consent of the Owner, Architect and the Architect's consultants.

## § 1.6 TRANSMISSION OF DATA IN DIGITAL FORM

If the parties intend to transmit Instruments of Service or any other information or documentation in digital form, they shall endeavor to establish necessary protocols governing such transmissions, unless otherwise already provided in the Agreement or the Contract Documents.

## ARTICLE 2 OWNER

### § 2.1 GENERAL

§ 2.1.1 The Owner is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Owner shall designate in writing a representative who shall have express authority to bind the Owner with respect to all matters requiring the Owner's approval or authorization. Except as otherwise provided in Section 4.2.1, the Architect does not have such authority. The term "Owner" means the Owner or the Owner's authorized representative.

### § 2.1.2

### § 2.2 INFORMATION AND SERVICES REQUIRED OF THE OWNER

#### § 2.2.1

§ 2.2.2 Except for permits and fees that are the responsibility of the Contractor under the Contract Documents, including those required under Section 3.7.1, the Owner shall secure and pay for necessary approvals, easements, assessments and charges required for construction, use or occupancy of permanent structures or for permanent changes in existing facilities.

§ 2.2.3 The Owner shall furnish **available** surveys describing physical characteristics, legal limitations and utility locations for the site of the Project, and a legal description of the site. The **Owner makes no warranties as to the accuracy or completeness of such material**. The Contractor shall exercise proper precautions relating to the safe performance of the Work.

§ 2.2.4 The Owner shall furnish information or services required of the Owner by the Contract Documents with reasonable promptness after receiving the Contractor's written request for such information or services.

*(Paragraph deleted)*

### § 2.3 OWNER'S RIGHT TO STOP THE WORK

If the Contractor fails to correct Work that is not in accordance with the requirements of the Contract Documents as required by Section 12.2 or repeatedly fails to carry out Work in accordance with the Contract Documents, the Owner may **in addition to any other remedy it may have herein terminate in accordance with Article 14** issue a written order to the Contractor to stop the Work, or any portion thereof, until the cause for such order has been eliminated; however, the right of the Owner to stop the Work shall not give rise to a duty on the part of the Owner to exercise this right for the benefit of the Contractor or any other person or entity, except to the extent required by Section 6.1.3.

### § 2.4 OWNER'S RIGHT TO CARRY OUT THE WORK

If the Contractor defaults or neglects to carry out the Work in accordance with the Contract Documents and fails within a ten-day period after receipt of written notice from the Owner to **to immediately correct** such default or neglect with diligence and promptness, the Owner may, without prejudice to other remedies the Owner may have, **including terminate in accordance with Article 14**, correct such deficiencies. In such case an appropriate Change Order shall be issued deducting from payments then or thereafter due the Contractor the reasonable cost of correcting such deficiencies, including Owner's expenses and compensation for the Architect's additional services made necessary by such default, neglect or failure. . If payments then or thereafter due the Contractor are not sufficient to cover such amounts, the Contractor shall pay the difference to the Owner. **In the event that the Contractor's failure to prosecute the Work causes (in the opinion of the Owner), a risk of harm to the public, the Owner shall have the right to carry out the Work without notice at the Contractor's cost and/or deduct such sums from amounts due the Contractor.**

Init.

## ARTICLE 3 CONTRACTOR

### § 3.1 GENERAL

§ 3.1.1 The Contractor is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Contractor shall be lawfully licensed, if required in the jurisdiction where the Project is located. The Contractor shall designate in writing a representative who shall have express authority to bind the Contractor with respect to all matters under this Contract. The term "Contractor" means the Contractor or the Contractor's authorized representative.

§ 3.1.2 The Contractor shall perform the Work in accordance with the Contract Documents.

§ 3.1.3 The Contractor shall not be relieved of obligations to perform the Work in accordance with the Contract Documents either by activities or duties of the Architect in the Architect's administration of the Contract, or by tests, inspections or approvals required or performed by persons or entities other than the Contractor.

### § 3.2 REVIEW OF CONTRACT DOCUMENTS AND FIELD CONDITIONS BY CONTRACTOR

§ 3.2.1 Execution of the Contract by the Contractor is a representation that the Contractor has visited the site, become generally familiar with local conditions under which the Work is to be performed and correlated personal observations with requirements of the Contract Documents.

§ 3.2.2 Because the Contract Documents are complementary, the Contractor shall, before starting each portion of the Work, carefully study and compare the various Contract Documents relative to that portion of the Work, as well as the information furnished by the Owner pursuant to Section 2.2.3, shall take field measurements of any existing conditions related to that portion of the Work, and shall observe any conditions at the site affecting it. These obligations are for the purpose of facilitating coordination and construction by the Contractor and are not for the purpose of discovering errors, omissions, or inconsistencies in the Contract Documents; however, the Contractor shall promptly report to the Architect, **in writing**, any errors, inconsistencies or omissions discovered by or made known to the Contractor as a request for information in such form as the Architect may require. It is recognized that the Contractor's review is made in the Contractor's capacity as a contractor and not as a licensed design professional, unless otherwise specifically provided in the Contract Documents.

§ 3.2.3 The Contractor is not required to ascertain that the Contract Documents are in accordance with applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, but the Contractor shall promptly report to the Architect **in writing** any nonconformity discovered by or made known to the Contractor as a request for information in such form as the Architect may require.

§ 3.2.4 The Contractor shall reimburse the Owner for costs incurred by the Architect for design and construction administration services which are caused by the Contractor's inefficient or otherwise faulty administration or execution of its Work. These may include but are not limited to the cost of the Architect to perform:

§ 3.2.4.1 Repeated review of the Contractor's submittals and submittals, substantially incomplete or out of sequence from the submittal schedule provided by the Contractor and agreed to by the Architect.

§ 3.2.4.2 An extensive number of responses to the Contractor's requests for information where such information is available to the Contractor from a careful study and comparison of the Contract Documents, field conditions, other Owner provided information, Contractor prepared coordination drawings, or prior correspondence or documentation.

§ 3.2.4.3 An extensive number of Change Orders and Construction Change Directives requiring evaluation of proposals and the preparation or revision of instruments of service and not otherwise caused by the design defects of the Architect.

§ 3.2.4.4 Consultation regarding replacement of Work resulting from fire or other such causes during construction.

§ 3.2.4.5 Evaluation of an extensive number of claims not otherwise caused by design defects.



§ 3.2.4.6 Evaluation of substitutions proposed by the Contractor and making subsequent revisions to Instruments of Services resulting therefrom.

§ 3.2.4.7 Contract Administration services provided forty-five (45) days or more after Substantial Completion.

§ 3.2.5 Preconstruction Inspection: The Contractor shall notify the Owner and the Architect in writing of any existing damage to the property or any unsafe conditions at the site prior to commencing the Work

### § 3.3 SUPERVISION AND CONSTRUCTION PROCEDURES

§ 3.3.1 The Contractor shall supervise and direct the Work, using the Contractor's best skill and attention. The Contractor shall be solely responsible for, and have control over, construction means, methods, techniques, sequences and procedures and for coordinating all portions of the Work. If the Contract Documents give specific instructions concerning construction means, methods, techniques, sequences or procedures, the Contractor shall evaluate the jobsite safety thereof and, except as stated below, shall be fully and solely responsible for the jobsite safety of such means, methods, techniques, sequences or procedures. If the Contractor determines that such means, methods, techniques, sequences or procedures may not be safe, the Contractor shall give timely written notice to the Owner and Architect and shall not proceed with that portion of the Work without further written instructions from the Architect.

§ 3.3.2 The Contractor shall be responsible to the Owner for acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons or entities performing or supplying portions of the Work for or on behalf of the Contractor or any of its Subcontractors.

§ 3.3.3 The Contractor shall be responsible for inspection of portions of Work already performed to determine that such portions are in proper condition to receive subsequent Work.

### § 3.4 LABOR AND MATERIALS

§ 3.4.1 Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for proper execution and completion of the Work, whether temporary or permanent and whether or not incorporated or to be incorporated in the Work.

§ 3.4.2 Except in the case of minor changes in the Work authorized by the Architect in accordance with Sections 3.12.8 or 7.4, the Contractor may make substitutions only with the consent of the Owner, after evaluation by the Architect and in accordance with a Change Order or Construction Change Directive.

§ 3.4.3 The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Work. The Contractor shall not permit employment of unfit persons or persons not properly skilled in tasks assigned to them. **The Contractor shall, upon written request of the Owner, remove and replace workers where the Owner deems such worker(s) to be disorderly, careless or incompetent, or to be employed in violation of the terms of the Contract Documents, at no increase in the Contract Sum or the Contract Time.**

§ 3.4.4. During the progress of the Work and at all times prior to the date of Substantial Completion or occupancy of the Work by the Owner, whichever is earlier, the Contractor shall provide temporary heat, ventilation, and enclosure, adequate to permit the Work to proceed in a timely fashion and to prevent damage to completed Work and Work in progress, and to materials stored on the premises. As a minimum, and not as a limitation, enclosed areas shall be heated from November 1 through March 31. The permanent heating and ventilation system may be used for these purposes when available, subject to conditions as forth in Division 1 of the Specifications.

### § 3.5 WARRANTY

The Contractor warrants to the Owner and Architect that materials and equipment furnished under the Contract will be of good quality and new and of recent manufacture unless the Contract Documents require otherwise. The Contractor further warrants that the Work will conform to the requirements of the Contract Documents and will be free from defects. Work, materials, or equipment not conforming to these requirements may be considered defective.

Init.

. All warranties and guarantees shall commence on the Date of Substantial Completion unless otherwise defined in the Contract Documents. Warranties and guarantees shall extend for a minimum of one year. Notwithstanding the foregoing, any special warranties as required by the Contract Documents or manufacturer's standard warranties extending longer than one year shall remain in effect for the full warranty period.

§ 3.5.2 The Contractor shall be solely responsible for determining that all materials furnished for the Work meet all requirements of the Contract Documents. The Architect may require the Contractor to furnish at the Contractor's expense, reasonable evidence that a material meets such requirements.

§ 3.5.3 The Warranty provided in this Paragraph 3.5 shall be in addition to and not in limitation of any other warranty required by the Contract Documents or otherwise prescribed by law..

§ 3.5.4 The Contractor shall procure and deliver to the Architect, no later than Substantial Completion, all special warranties required by the Contract Documents. Delivery of such warranties shall constitute the Contractor's guarantee to the Owner that the warranties will be performed in accordance with their terms and conditions.

### § 3.6 TAXES

The Contractor shall pay sales, consumer, use and similar taxes for the Work provided by the Contractor that are legally enacted when bids are received or negotiations concluded, whether or not yet effective or merely scheduled to go into effect. **However, the Contractor shall not pay, and the Owner shall not reimburse, or pay the Contractor for, any sales taxes for building supplies or materials for which an exemption is provided by law. The Owner's tax exemption number, to be used by the Contractor in this regard, will be provided by the Owner.**

### § 3.7 PERMITS, FEES, NOTICES, AND COMPLIANCE WITH LAWS

§ 3.7.1 Building permits with the Borough of Naugatuck's Building Department have been waived. The Contractor shall secure and pay for other permits, fees, licenses, and inspections by government agencies necessary for proper execution and completion of the Work that are customarily secured after execution of the Contract and legally required at the time bids are received or negotiations concluded.

#### § 3.7.1.1 [INSERT PROVISION FOR WAIVER OF ANY/OR ALL PERMIT FEES AND/OR INSPECTIONS HERE]

§ 3.7.2 The Contractor shall comply with and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders **and directives** of public authorities **and governmental inspection agencies** applicable to performance of the Work.

§ 3.7.3 If the Contractor performs Work **which it should know** to be contrary to applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, the Contractor shall assume appropriate responsibility for such Work and shall bear the costs attributable to correction **in addition to any other damages incurred by the Owner.**

§ 3.7.4 **Concealed or Unknown Conditions.** If the Contractor encounters conditions at the site that are (1) subsurface or otherwise concealed physical conditions that differ materially from those indicated in the Contract Documents or (2) unknown physical conditions of an unusual nature, that differ materially from those ordinarily found to exist and generally recognized as inherent in construction activities of the character provided for in the Contract Documents, the Contractor shall promptly provide notice to the Owner and the Architect before conditions are disturbed

§ 3.7.5 If, in the course of the Work, the Contractor encounters human remains or recognizes the existence of burial markers, archaeological sites or wetlands not indicated in the Contract Documents, the Contractor shall immediately suspend any operations that would affect them and shall notify the Owner and Architect. Upon receipt of such notice, the Owner shall promptly take any action necessary to obtain governmental authorization required to resume the operations. The Contractor shall continue to suspend such operations until otherwise instructed by the Owner but shall continue with all other operations that do not affect those remains or features. Requests for adjustments in the

Contract Sum and Contract Time arising from the existence of such remains or features may be made as provided in

### § 3.8 ALLOWANCES

§ 3.8.1 The Contractor shall include in the Contract Sum all allowances stated in the Contract Documents. Items covered by allowances shall be supplied for such amounts and by such persons or entities as the Owner may direct, but the Contractor shall not be required to employ persons or entities to whom the Contractor has reasonable objection.

§ 3.8.2 Unless otherwise provided in the Contract Documents,

- .1 allowances shall cover the cost to the Contractor of materials and equipment delivered at the site and all required taxes, less applicable trade discounts;
- .2 Contractor's costs for unloading and handling at the site, labor, installation costs, overhead, profit and other expenses contemplated for stated allowance amounts shall be included in the Contract Sum but not in the allowances; and
- .3 whenever costs are more than or less than allowances, the Contract Sum shall be adjusted accordingly by Change Order. The amount of the Change Order shall reflect (1) the difference between actual costs and the allowances under Section 3.8.2.1 and (2) changes in Contractor's costs under Section 3.8.2.2.

§ 3.8.3 Materials and equipment under an allowance shall be selected by the Owner with reasonable promptness.

### § 3.9 SUPERINTENDENT

§ 3.9.1 The Contractor shall employ a competent **full time** superintendent who does not work with the tools and necessary assistants who shall be in attendance at the Project site during performance of the Work. The superintendent shall represent the Contractor, and communications given to the superintendent shall be as binding as if given to the Contractor.

§ 3.9.1.2 The Contractor's Superintendent and similar authorized representative of any Subcontractor, supplier or any other person or organization shall attend all meetings as required by the Owner.

§ 3.9.1.3 When the presence of a Subcontractor or Sub-subcontractor is required at a job meeting, the Contractor shall require that the Subcontractor or Sub-subcontractor be represented by an authorized representative who is empowered to make binding commitments on all matters to be discussed as such meetings, including costs, payments, Change Orders, time schedules and manpower. Notices required under the Contract may be served on such representatives.

§ 3.9.2 The Contractor, as soon as practicable after award of the Contract, shall furnish in writing to the Owner through the Architect the name and qualifications of a proposed superintendent and necessary assistants. The Architect may reply to the Contractor in writing stating (1) whether the Owner or the Architect has reasonable objection to the proposed superintendent or (2) that the Architect requires additional time to review. **If the Owner or Architect objects to the Contractor's Superintendent or any assistant, whether initially or otherwise, the Contractor shall submit a competent replacement Superintendent or assistant at no increase in the Contract Sum or the Contract Time.**

§ 3.9.3 The Contractor shall not employ a proposed superintendent or necessary assistants to whom the Owner or Architect has made reasonable and timely objection. The Contractor shall not change the superintendent or necessary assistants without providing written notice to the Owner through the Architect, and receiving the Owner's or Architect's written consent, which shall not unreasonably be withheld or delayed.

### § 3.10 CONTRACTOR'S CONSTRUCTION SCHEDULES

§ 3.10.1 The Contractor, promptly after being awarded the Contract, shall prepare and submit for the Owner's and Architect's information a Contractor's construction schedule for the Work. The schedule shall not exceed time limits current under the Contract Documents, shall be revised at appropriate intervals as required by the conditions of the Work and Project, shall be related to the entire Project to the extent required by the Contract Documents, and shall provide for expeditious and practicable execution of the Work.

**§ 3.10.2** The Contractor shall prepare a submittal schedule, promptly after being awarded the Contract and thereafter as necessary to maintain a current submittal schedule, and shall submit the schedule(s) for the Architect's approval. The Architect's approval shall not unreasonably be delayed or withheld. The submittal schedule shall (1) be coordinated with the Contractor's construction schedule, and (2) allow the Architect **sufficient** time to review submittals **in accordance with Specifications**. If the Contractor fails to submit a submittal schedule, the Contractor shall not be entitled to any increase in Contract Sum or extension of Contract Time based on the time required for review of submittals.

**§ 3.10.3** Time is of the essence of the Contract. Accordingly, the Contractor shall perform the Work in strict accordance with the approved construction schedule. The Contractor's compliance with the construction schedule shall be a material obligation of this Contract. If each of three successive applications for payment, as certified by the Architect, indicate that the actual work completed is less than 90% of the values estimated to be completed by the respective trades as shown or listed on Specification Section 01 32 00, titled "Construction Progress Documentation", the cost correlation line of the Construction Schedule, the Owner may, at the Owner's option, treat the Contractor's delinquency as a default and the Owner may pursue any remedy in light of such default, including but not limited to the action permitted under Section 14.2.

### **§ 3.11 DOCUMENTS AND SAMPLES AT THE SITE**

The Contractor shall maintain at the site for the Owner one copy of the Drawings, Specifications, Addenda, Change Orders and other Modifications, in good order and marked currently to indicate field changes and selections made during construction, and one copy of approved Shop Drawings, Product Data, Samples and similar required submittals. These shall be available to the Architect and shall be delivered to the Architect for submittal to the Owner upon completion of the Work as a record of the Work as constructed.

### **§ 3.12 SHOP DRAWINGS, PRODUCT DATA AND SAMPLES**

**§ 3.12.1** Shop Drawings are drawings, diagrams, schedules and other data specially prepared for the Work by the Contractor or a Subcontractor, Sub-subcontractor, manufacturer, supplier or distributor to illustrate some portion of the Work.

**§ 3.12.2** Product Data are illustrations, standard schedules, performance charts, instructions, brochures, diagrams and other information furnished by the Contractor to illustrate materials or equipment for some portion of the Work.

**§ 3.12.3** Samples are physical examples that illustrate materials, equipment or workmanship and establish standards by which the Work will be judged.

**§ 3.12.4** Shop Drawings, Product Data, Samples and similar submittals are not Contract Documents. Their purpose is to demonstrate the way by which the Contractor proposes to conform to the information given and the design concept expressed in the Contract Documents for those portions of the Work for which the Contract Documents require submittals. Review by the Architect is subject to the limitations of Section 4.2.7. Informational submittals upon which the Architect is not expected to take responsive action may be so identified in the Contract Documents. Submittals that are not required by the Contract Documents may be returned by the Architect without action.

**§ 3.12.5** The Contractor shall review for compliance with the Contract Documents, approve and submit to the Architect Shop Drawings, Product Data, Samples and similar submittals required by the Contract Documents in accordance with the submittal schedule approved by the Architect or, in the absence of an approved submittal schedule, with reasonable promptness and in such sequence as to cause no delay in the Work or in the activities of the Owner or of separate contractors. **Submittals that are not marked as reviewed for compliance with the Contract Documents and approved by the Contractor may be returned by the Architect without action.**

**§ 3.12.6** By submitting Shop Drawings, Product Data, Samples and similar submittals, the Contractor represents to the Owner and Architect that the Contractor has (1) reviewed and approved them, (2) determined and verified materials, field measurements and field construction criteria related thereto, and (3) checked and coordinated the information contained within such submittals with the requirements of the Work and of the Contract Documents.

Init.

§ 3.12.7 The Contractor shall perform no portion of the Work for which the Contract Documents require submittal and review of Shop Drawings, Product Data, Samples or similar submittals until the respective submittal has been approved by the Architect.

§ 3.12.8 The Work shall be in accordance with approved submittals except that the Contractor shall not be relieved of responsibility for deviations from requirements of the Contract Documents by the Architect's approval of Shop Drawings, Product Data, Samples or similar submittals unless the Contractor has specifically informed the Architect in writing of such deviation at the time of submittal and (1) the Architect has given written approval to the specific deviation as a minor change in the Work, or (2) a Change Order or Construction Change Directive has been issued authorizing the deviation. The Contractor shall not be relieved of responsibility for errors or omissions in Shop Drawings, Product Data, Samples or similar submittals by the Architect's approval thereof.

§ 3.12.9 The Contractor shall direct specific attention, in writing or on resubmitted Shop Drawings, Product Data, Samples or similar submittals, to revisions other than those requested by the Architect on previous submittals. In the absence of such written notice, the Architect's approval of a resubmission shall not apply to such revisions.

§ 3.12.10 The Contractor shall not be required to provide professional services that constitute the practice of architecture or engineering unless such services are specifically required by the Contract Documents for a portion of the Work or unless the Contractor needs to provide such services in order to carry out the Contractor's responsibilities for construction means, methods, techniques, sequences and procedures. The Contractor shall not be required to provide professional services in violation of applicable law. If professional design services or certifications by a design professional related to systems, materials or equipment are specifically required of the Contractor by the Contract Documents, the Contractor shall cause such services or certifications to be provided by a properly licensed design professional, whose signature and seal shall appear on all drawings, calculations, specifications, certifications, Shop Drawings and other submittals prepared by such professional. Shop Drawings and other submittals related to the Work designed or certified by such professional, if prepared by others, shall bear such professional's written approval when submitted to the Architect. The Owner and the Architect shall be entitled to rely upon the adequacy, accuracy and completeness of the services, certifications and approvals performed or provided by such design professionals. Pursuant to this Section 3.12.10, the Architect will review, approve or take other appropriate action on submittals only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. The Contractor shall not be responsible for the adequacy of the performance and design criteria specified in the Contract Documents.

§ 3.12.11 When professional certification of materials, systems or equipment is required by the Contract Documents, the Owner shall be entitled to rely upon such certifications, and neither the Owner nor the Architect shall be expected to make an independent examination with respect to the performance of such materials systems or equipment.

### § 3.13 USE OF SITE

The Contractor shall confine operations at the site to areas permitted by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities and the Contract Documents and shall not unreasonably encumber the site with materials or equipment. **The right of possession of the premises and the improvements made thereon by the Contractor shall remain at all times in the Owner. The Contractor's right to entry and use thereof arises solely from the permission granted by the Owner under the Contract Documents. The Contractor shall confine the Contractor's apparatus, the storage of materials and the operations of the Contractor's workers to limits indicated by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities, the Contractor Documents, and/or directions of the Architect and shall not unreasonably encumber the premises with the Contractor's materials. The Owner shall not be liable to the Contractor, the Subcontractors, their employees or anyone else with respect to the conditions of the premises, except only for a condition caused directly and solely by the negligence of the Owner.**

§ 3.13.1 Following the date of Substantial Completion, the Contractor shall notify the Owner prior to each entry to the site, and neither the Contractor nor its Subcontractors shall enter the site without the express permission of the Owner

### § 3.14 CUTTING AND PATCHING

§ 3.14.1 The Contractor shall be responsible for cutting, **coring**, fitting and patching required to complete the Work or to make its parts fit together properly as described in Division 01 Specification Section titled "CUTTING AND PATCHING". All areas requiring cutting, **coring**, fitting and patching shall be restored to the condition existing prior to the cutting, **coring**, fitting and patching, unless otherwise required by the Contract Documents.

§ 3.14.2 The Contractor shall not damage or endanger a portion of the Work or fully or partially completed construction of the Owner or separate contractors by cutting, **coring**, **fitting**, patching or otherwise altering such construction, or by excavation. The Contractor shall not cut or otherwise alter such construction by the Owner or a separate contractor except with written consent of the Owner and of such separate contractor; such consent shall not be unreasonably withheld. The Contractor shall not unreasonably withhold from the Owner or a separate contractor the Contractor's consent to cutting or otherwise altering the Work.

### § 3.15 CLEANING UP

§ 3.15.1 The Contractor shall **on a daily basis** keep the premises and surrounding area free from accumulation of waste materials or rubbish caused by operations under the Contract. At completion of the Work, the Contractor shall remove from and about the Project waste materials, rubbish, the Contractor's tools, construction equipment, machinery and surplus materials.

§ 3.15.2 If the Contractor fails to clean up as provided in the Contract Documents, the Owner may do so and Owner shall be entitled to reimbursement from the Contractor.

### § 3.16 ACCESS TO WORK

The Contractor shall provide the Owner, and Architect access to the Work in preparation and progress wherever located.

### § 3.17 ROYALTIES, PATENTS AND COPYRIGHTS

The Contractor shall pay all royalties and license fees. The Contractor shall defend suits or claims for infringement of copyrights and patent rights and shall hold the Owner and Architect harmless from loss on account thereof, but shall not be responsible for such defense or loss when a particular design, process or product of a particular manufacturer or manufacturers is required by the Contract Documents, or where the copyright violations are contained in Drawings, Specifications or other documents prepared by the Owner or Architect. However, if the Contractor has reason to believe that the required design, process or product is an infringement of a copyright or a patent, the Contractor shall be responsible for such loss unless such information is promptly furnished to the Architect.

### § 3.18 INDEMNIFICATION

§ 3.18.1 To the fullest extent permitted by law the Contractor shall indemnify and hold harmless the Owner, Architect, Architect's consultants, and agents and employees of any of them from and against claims, damages, losses and expenses, including but not limited to attorneys' fees caused by the negligent acts or omissions of the Contractor, a Subcontractor, anyone directly or indirectly employed by them or anyone for whose acts they may be liable, regardless of whether or not such claim, damage, loss or expense is caused in part by a party indemnified hereunder. Such obligation shall not be construed to negate, abridge, or reduce other rights or obligations of indemnity which would otherwise exist as to a party or person described in this Section 3.18.

§ 3.18.2 In claims against any person or entity indemnified under this Section 3.18 by an employee of the Contractor, a Subcontractor, anyone directly or indirectly employed by them or anyone for whose acts they may be liable, the indemnification obligation under Section 3.18.1 shall not be limited by a limitation on amount or type of damages, compensation or benefits payable by or for the Contractor or a Subcontractor under workers' compensation acts, disability benefit acts or other employee benefit acts.

## ARTICLE 4 ARCHITECT

### § 4.1 GENERAL

§ 4.1.1 The Owner shall retain an architect lawfully licensed to practice architecture or an entity lawfully practicing architecture in the jurisdiction where the Project is located. That person or entity is identified as the Architect in the Agreement and is referred to throughout the Contract Documents as if singular in number.

Init.

§ 4.1.2 Duties, responsibilities and limitations of authority of the Architect as set forth in the Contract Documents shall not be restricted, modified or extended without written consent of the Owner, Contractor and Architect. Consent shall not be unreasonably withheld.

§ 4.1.3 If the employment of the Architect is terminated, the Owner shall employ a new Architect whose status under the Contract Documents shall be that of the former Architect.

#### § 4.2 ADMINISTRATION OF THE CONTRACT

§ 4.2.1 The Architect will provide administration of the Contract as described in the Contract Documents and will be an Owner's representative during construction until the date the Architect issues the final Certificate For Payment. The Architect will have authority to act on behalf of the Owner only to the extent provided in the Contract Documents.

§ 4.2.2 The Architect will visit the site at intervals appropriate to the stage of construction, or as otherwise agreed with the Owner, to become generally familiar with the progress and quality of the portion of the Work completed, and to determine in general if the Work observed is being performed in a manner indicating that the Work, when fully completed, will be in accordance with the Contract Documents. However, the Architect will not be required to make exhaustive or continuous on-site inspections to check the quality or quantity of the Work. The Architect will not have control over, charge of, or responsibility for, the construction means, methods, techniques, sequences or procedures, or for the safety precautions and programs in connection with the Work, since these are solely the Contractor's rights and responsibilities under the Contract Documents, except as provided in Section 3.3.1.

§ 4.2.3 On the basis of the site visits, the Architect will keep the Owner reasonably informed about the progress and quality of the portion of the Work completed, and report to the Owner (1) known deviations from the Contract Documents and from the most recent construction schedule submitted by the Contractor, and (2) defects and deficiencies observed in the Work. The Architect will not be responsible for the Contractor's failure to perform the Work in accordance with the requirements of the Contract Documents. The Architect will not have control over or charge of and will not be responsible for acts or omissions of the Contractor, Subcontractors, or their agents or employees, or any other persons or entities performing portions of the Work.

#### § 4.2.4 COMMUNICATIONS FACILITATING CONTRACT ADMINISTRATION

Except as otherwise provided in the Contract Documents or when direct communications have been specially authorized, the Owner and Contractor shall endeavor to communicate with each other through the Architect about matters arising out of or relating to the Contract. Communications by and with the Architect's consultants shall be through the Architect. Communications by and with Subcontractors and material suppliers shall be through the Contractor. Communications by and with separate contractors shall be through the Owner.

§ 4.2.5 Based on the Architect's evaluations of the Contractor's Applications for Payment, the Architect will review and certify the amounts due the Contractor and will issue Certificates for Payment in such amounts.

§ 4.2.6 The Architect has authority to reject Work that does not conform to the Contract Documents. Whenever the Architect considers it necessary or advisable, the Architect will have authority to require inspection or testing of the Work in accordance with Sections 13.5.2 and 13.5.3, whether or not such Work is fabricated, installed or completed. However, neither this authority of the Architect nor a decision made in good faith either to exercise or not to exercise such authority shall give rise to a duty or responsibility of the Architect to the Contractor, Subcontractors, material and equipment suppliers, their agents or employees, or other persons or entities performing portions of the Work.

§ 4.2.7 The Architect will review and approve, or take other appropriate action upon, the Contractor's submittals such as Shop Drawings, Product Data and Samples, but only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. The Architect's action will be taken in accordance with the submittal schedule approved by the Architect or, in the absence of an approved submittal schedule, with reasonable promptness while allowing sufficient time in the Architect's professional judgment to permit adequate review, **which may take up to 28 days for any one submittal or resubmittal depending on the complexity of the submittal.** Review of such submittals is not conducted for the purpose of determining the accuracy and completeness of other details such as dimensions and quantities, or for substantiating

Init.

instructions for installation or performance of equipment or systems, all of which remain the responsibility of the Contractor as required by the Contract Documents. The Architect's review of the Contractor's submittals shall not relieve the Contractor of the obligations under Sections 3.3, 3.5 and 3.12. The Architect's review shall not constitute approval of safety precautions or, of any construction means, methods, techniques, sequences or procedures. The Architect's approval of a specific item shall not indicate approval of an assembly of which the item is a component.

§ 4.2.8 The Architect will prepare Change Orders and Construction Change Directives, and may authorize minor changes in the Work as provided in Section 7.4. The Architect will investigate and make determinations and recommendations regarding concealed and unknown conditions as provided in Section 3.7.4.

§ 4.2.9 The Architect will conduct inspections to determine the date or dates of Substantial Completion and the date of final completion; issue Certificates of Substantial Completion pursuant to Section 9.8; receive **from the Contractor** and forward to the Owner, for the Owner's review and records, **record drawings**, written warranties and related documents required by the Contract and assembled by the Contractor pursuant to Section 9.10; and issue a final Certificate for Payment pursuant to Section 9.10.

§ 4.2.10 If the Owner and Architect agree, the Architect will provide one or more project representatives to assist in carrying out the Architect's responsibilities at the site. **The Owner, will employ a Resident Project Representative for the Project. The Resident Project Representative shall have no authority to approve Work, to approve changes, or to exercise any or the power and authority of the Owner or the Architect. The Resident Project Representative will be required to be on site at all times when the Contractor is on site. Should the Contractor perform work outside of, or in addition to normal working hours, or in excess of 40 hours per week in order to keep the Project on schedule, or for any other reason, then the Resident Project Representative will work the same hours as the Contractor, and the Contractor shall reimburse the Owner for any additional costs for such services. This reimbursement shall be by means of a credit Change Order executed at the time of Substantial Completion.**

§ 4.2.11 The Architect will interpret and decide matters concerning performance under, and requirements of, the Contract Documents on written request of either the Owner or Contractor. The Architect's response to such requests will be made in writing within any time limits agreed upon or otherwise with reasonable promptness.

§ 4.2.12 Interpretations and decisions of the Architect will be consistent with the intent of, and reasonably inferable from, the Contract Documents and will be in writing or in the form of drawings. When making such interpretations and decisions, the Architect will endeavor to secure faithful performance by both Owner and Contractor, will not show partiality to either and will not be liable for results of interpretations or decisions rendered in good faith.

§ 4.2.13 The Architect's decisions on matters relating to aesthetic effect will be final if consistent with the intent expressed in the Contract Documents.

§ 4.2.14 The Architect will review and respond to requests for information about the Contract Documents. The Architect's response to such requests will be made in writing within any time limits agreed upon or otherwise with reasonable promptness. If appropriate, the Architect will prepare and issue supplemental Drawings and Specifications in response to the requests for information.

## ARTICLE 5 SUBCONTRACTORS

### § 5.1 DEFINITIONS

§ 5.1.1 A Subcontractor is a person or entity who has a direct contract with the Contractor to perform a portion of the Work at the site. The term "Subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Subcontractor or an authorized representative of the Subcontractor. The term "Subcontractor" does not include a separate contractor or subcontractors of a separate contractor.

§ 5.1.2 A Sub-subcontractor is a person or entity who has a direct or indirect contract with a Subcontractor to perform a portion of the Work at the site. The term "Sub-subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Sub-subcontractor or an authorized representative of the Sub-subcontractor.

Init.



## § 5.2 AWARD OF SUBCONTRACTS AND OTHER CONTRACTS FOR PORTIONS OF THE WORK

§ 5.2.1 Within 15 days after receipt of the Notice to Proceed, the Contractor shall furnish in writing to the Owner through the Architect the names of persons or entities (including those who are to furnish materials or equipment fabricated to a special design) proposed for each principal portion of the Work. The Architect will promptly reply to the Contractor in writing stating (1) whether the Owner or the Architect has reasonable objection to any such proposed person or entity or (2) that the Architect requires additional time for review. Failure of the Owner or Architect to reply promptly shall constitute notice of no reasonable objection.

§ 5.2.2 The Contractor shall not contract with a proposed person or entity to whom the Owner or Architect has made reasonable and timely objection. The Contractor shall not be required to contract with anyone to whom the Contractor has made reasonable objection.

§ 5.2.3 If the Owner or Architect has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom neither the Owner nor Architect has no reasonable objection. No increase in the Contract Sum or Contract Time shall be allowed for such change.

§ 5.2.4 The Contractor shall not substitute a Subcontractor, person or entity previously selected if the Owner or Architect makes reasonable objection to such substitution.

## § 5.3 SUBCONTRACTUAL RELATIONS

By appropriate agreement, written where legally required for validity, the Contractor shall require each Subcontractor, to the extent of the Work to be performed by the Subcontractor, to be bound to the Contractor by terms of the Contract Documents, and to assume toward the Contractor all the obligations and responsibilities, including the responsibility for safety of the Subcontractor's Work, which the Contractor, by these Documents, assumes toward the Owner and Architect. Each subcontract agreement shall preserve and protect the rights of the Owner and Architect under the Contract Documents with respect to the Work to be performed by the Subcontractor so that subcontracting thereof will not prejudice such rights, and shall allow to the Subcontractor, unless specifically provided otherwise in the subcontract agreement, the benefit of all rights, remedies and redress against the Contractor that the Contractor, by the Contract Documents, has against the Owner. Where appropriate, the Contractor shall require each Subcontractor to enter into similar agreements with Sub-subcontractors. The Contractor shall make available to each proposed Subcontractor, prior to the execution of the subcontract agreement, copies of the Contract Documents to which the Subcontractor will be bound, and, upon written request of the Subcontractor, identify to the Subcontractor terms and conditions of the proposed subcontract agreement that may be at variance with the Contract Documents. Subcontractors will similarly make copies of applicable portions of such documents available to their respective proposed Sub-subcontractors.

## § 5.4 CONTINGENT ASSIGNMENT OF SUBCONTRACTS

§ 5.4.1 Each subcontract agreement for a portion of the Work is assigned by the Contractor to the Owner, provided that

- .1 assignment is effective only after termination of the Contract by the Owner for cause pursuant to Section 14.2 and only for those subcontract agreements that the Owner accepts by notifying the Subcontractor and Contractor in writing; and
- .2 assignment is subject to the prior rights of the surety, if any, obligated under bond relating to the Contract.

When the Owner accepts the assignment of a subcontract agreement, the Owner assumes the Contractor's rights and obligations under the subcontract.

§ 5.4.2 Upon such assignment, if the Work has been suspended for more than 30 days, the Subcontractor's compensation shall be equitably adjusted for increases in cost resulting from the suspension.

§ 5.4.3 Upon such assignment to the Owner under this Section 5.4, the Owner may further assign the subcontract to a successor contractor or other entity. If the Owner assigns the subcontract to a successor contractor or other entity, the Owner shall nevertheless remain legally responsible for all of the successor contractor's obligations under the subcontract.

## **ARTICLE 6 CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS**

### **§ 6.1 OWNER'S RIGHT TO PERFORM CONSTRUCTION AND TO AWARD SEPARATE CONTRACTS**

**§ 6.1.1** The Owner reserves the right to perform construction or operations related to the Project with the Owner's own forces, and to award separate contracts in connection with other portions of the Project or other construction or operations on the site under Conditions of the Contract identical or substantially similar to these including those portions related to insurance and waiver of subrogation. If the Contractor claims that delay or additional cost is involved because of such action by the Owner, the Contractor shall make such Claim as provided in Article 15.

**§ 6.1.1.1** The Owner reserves the right to access any part of the Project at any time to install material or services other than the Work, either with its own forces or with separate contractors hired by the Owner. Such access is in not to be construed as partial occupancy by the Owner. The Contractor shall permit the Owner to place, and install furniture, equipment and other materials during the progress of the Work, and agrees that the installation of such items shall not be construed as acceptance of the Work or any portion thereof.

**§ 6.1.2** When separate contracts are awarded for different portions of the Project or other construction or operations on the site, the term "Contractor" in the Contract Documents in each case shall mean the Contractor who executes each separate Owner-Contractor Agreement.

**§ 6.1.3** The Owner shall provide for coordination of the activities of the Owner's own forces and of each separate contractor with the Work of the Contractor, who shall cooperate with them. The Contractor shall participate with other separate contractors and the Owner in reviewing their construction schedules. The Contractor shall make any revisions to the construction schedule deemed necessary after a joint review and mutual agreement. The construction schedules shall then constitute the schedules to be used by the Contractor, separate contractors and the Owner until subsequently revised.

**§ 6.1.4** Unless otherwise provided in the Contract Documents, when the Owner performs construction or operations related to the Project with the Owner's own forces, the Owner shall be deemed to be subject to the same obligations and to have the same rights that apply to the Contractor under the Conditions of the Contract, including, without excluding others, those stated in Article 3, this Article 6 and Articles 10, 11 and 12.

### **§ 6.2 MUTUAL RESPONSIBILITY**

**§ 6.2.1** The Contractor shall afford the Owner and separate contractors reasonable opportunity for introduction and storage of their materials and equipment and performance of their activities, and shall connect and coordinate the Contractor's construction and operations with theirs as required by the Contract Documents.

**§ 6.2.2** If part of the Contractor's Work depends for proper execution or results upon construction or operations by the Owner or a separate contractor, the Contractor shall, prior to proceeding with that portion of the Work, promptly report to the Architect apparent discrepancies or defects in such other construction that would render it unsuitable for such proper execution and results. Failure of the Contractor so to report shall constitute an acknowledgment that the Owner's or separate contractor's completed or partially completed construction is fit and proper to receive the Contractor's Work, except as to defects not then reasonably discoverable.

**§ 6.2.3** The Contractor shall reimburse the Owner for costs the Owner incurs that are payable to a separate contractor because of the Contractor's delays, improperly timed activities or defective construction. The Owner shall be responsible to the Contractor for costs the Contractor incurs because of a separate contractor's delays, improperly timed activities, damage to the Work or defective construction.

**§ 6.2.4** The Contractor shall promptly remedy damage the Contractor wrongfully causes to completed or partially completed construction or to property of the Owner, separate contractors as provided in Section 10.2.5.

**§ 6.2.5** The Owner and each separate contractor shall have the same responsibilities for cutting and patching as are described for the Contractor in Section 3.14.

Init.

### **§ 6.3 OWNER'S RIGHT TO CLEAN UP**

If a dispute arises among the Contractor, separate contractors and the Owner as to the responsibility under their respective contracts for maintaining the premises and surrounding area free from waste materials and rubbish, the Owner may clean up and the Architect will allocate the cost among those responsible.

## **ARTICLE 7 CHANGES IN THE WORK**

### **§ 7.1 GENERAL**

**§ 7.1.1** Changes in the Work may be accomplished after execution of the Contract, and without invalidating the Contract, by Change Order, Construction Change Directive or order for a minor change in the Work, subject to the limitations stated in this Article 7 and elsewhere in the Contract Documents.

**§ 7.1.2** A Change Order shall be based upon agreement among the Owner, Contractor and Architect; a Construction Change Directive requires agreement by the Owner and Architect and may or may not be agreed to by the Contractor; an order for a minor change in the Work may be issued by the Architect alone.

**§ 7.1.3** Changes in the Work shall be performed under applicable provisions of the Contract Documents, and the Contractor shall proceed promptly, unless otherwise provided in the Change Order, Construction Change Directive or order for a minor change in the Work.

### **§ 7.2 CHANGE ORDERS**

**§ 7.2.1** A Change Order is a written instrument prepared by the Architect and signed by the Owner, Contractor and Architect stating their agreement upon all of the following:

- .1 The change in the Work;
- .2 The amount of the adjustment, if any, in the Contract Sum; and
- .3 The extent of the adjustment, if any, in the Contract Time.

**§ 7.2.2** Upon request of the Owner or the Architect, the Contractor shall without cost to the Owner, submit to the Architect in such form that the Architect may require a written proposal for a Change in the Work. The proposal shall include the quantity and unit cost of each item of material, and the number of hours of work and the hourly rate for each class of labor, as well as the description and amounts of all other costs sought by the Contractor to perform the proposed change. The Contractor shall also furnish to the Architect bona fide proposals for Subcontractor and suppliers for all labor, materials and equipment to be incorporated into such Work. The Contractor, when requested, shall furnish in a form satisfactory to the Owner, itemized statements of the cost of Work, including, but not limited to, certified payrolls and copies of accounts, bills and vouchers to substantiate the estimates. The proposal shall be furnished promptly so as not to delay the Work and shall include an estimate of any additional time required to complete the Work. Percentages of overhead and profit shall be accordance with paragraph 7.2.4.

**§ 7.2.2.1** Change Order Proposals shall be complete and all inclusive. The amount of the adjustment in the Contract Sum and Contract Time, if any, shall be stated in the proposal for all Work Affected by the proposed change. Once a Change Order is executed, the Contractor shall be required to perform all of the Work required therein (including incidental work and changes to related Work which may be required to complete the Change Order) in accordance with the Contract Documents, for the amount stated in the Change Order.

**§ 7.2.2.2** Contractor's requests for changes or substitutes shall be subject to the same requirements as a change initiated by the Architect or Owner.

**§ 7.2.3** The cost or credit to the Owner resulting from a Change in the Work, absent the applicability of a unit price for such item(s) set forth in the Contract shall be determined as follows:

**§ 7.2.3.1** The cost of material and equipment incorporated into the Work.

**§ 7.2.3.2** The cost of wages, including fringe benefits mandated by collective bargaining agreements.

§ 7.2.3.3 Cost of Workers' Compensation, employer Liability Insurance, Federal Social Security (FICA), Federal Unemployment Compensation \*FUTA), Commonwealth of Massachusetts Unemployment Compensation (SUTA).

§ 7.2.3.4 Cost of Builder's Risk Insurance. Actual cost for builders risk associated with the value of all the change orders at the end of the project and supported by a written documentation from the bonding company and or insurance company that the change order (final) requires an increase to the original premium for builders risk will be processed. No overhead and profit for this change order will be allowed.

§ 7.2.3.5 Cost of Performance and Payment Bonds. Actual cost for payment and performance bond associated with the value of all the change orders at the end of the project and supported by a written documentation from the bonding company and or insurance company that the change order (final) requires an increase to the original premium for payment and performance bond will be processed. No overhead and profit for this change order will be allowed.

§ 7.2.3.6 Cost of rental of equipment whose purchase price is greater than two hundred fifty dollars (\$250.00). Cost of rental shall be substantiated by invoice for the actual rental cost; or in the case where the equipment is owned, the cost shall include the daily, weekly and monthly rates for such equipment. The applicable rate shall be as mutually agreed by the Contractor and Owner.

§ 7.2.3.6.1 Cost of fuel consumed by equipment used in the performance of the Work if not included in the publicized rate.

§ 7.2.3.7 Cost of pro rata share of debris removal and dumpster rental. This cost shall be allowed only when the debris removal is associated with Work such as demolition but shall not be allowed as part of general cleanup.

§ 7.2.3.8 Cost of a foreman that does not work with the tools. This cost shall be allowed if the crew size of a respective traded exceeds a combined total of six journeymen and apprentices. In such instances the total foremen hours may not exceed one sixth of the hours of the working crew.

§ 7.2.3.9 Cost of project management, site management field office personnel, superintendence, field coordination, superintendent's truck, foremen's truck, uniforms, mileage, mailings/copying, and as-build drawings shall be included in overhead and profit, and shall not be allowed as separate line items.

§ 7.2.3.10 Costs of small tools whose individual cost is less than two hundred fifty dollars (\$250.00) shall be included in overhead and profit, and shall not be allowed as separate line items.

§ 7.2.3.11 Cost of cleanup shall be included in overhead and profit, and shall not be allowed as a separate line item unless the Work is performed in a portion of the building or site that has been previously cleaned, inspected by the Architect, and is ready for occupancy by the Owner.

§ 7.2.3.12 Cost of revisions to shop drawings shall not be allowed as a separate line item unless the shop drawings have been previously submitted and approved by the Architect.

§ 7.2.3.13 All other costs which are not specifically enumerated in Article 7.2.3 shall be included in overhead and profit, and shall not be allowed as separate line items.

§ 7.2.4 The percentage for overhead and profit on allowable costs enumerated in Article 7.2.3 shall be determined as follows and shall be expressed as a percentage of costs:

§ 7.2.4.1 On the Work performed by the Contractor with its own forces, the Contractor shall be allowed ten percent (10%) for overhead and profit.

§ 7.2.4.2 On the Work performed by a Subcontractor with its own forces, the Subcontractor shall be allowed ten percent (10%) for overhead and profit.

§ 7.2.4.3 On the Work performed by a Sub-subcontractor with its own forces, the Sub-subcontractor shall be allowed ten percent (10%) for overhead and profit.

§ 7.2.4.4 On the Work performed by a Subcontractor, the Contractor shall be allowed five percent (5%) for overhead and profit.

§ 7.2.4.5 On the Work performed by a Sub-subcontractor, the Sub contractor shall be allowed five percent (5%) for overhead and profit.

§ 7.2.4.6 The amount of credit to be allowed by the Contractor to the Owner for a deletion or change which results in a net decrease in the contract Sum shall be the actual net cost as confirmed by the Architect. When both additions and credit covering related Work or substitutions are involved in the change, the allowance for overhead and profit shall be figured on the basis of net increase, if any, with respect to that change.

§ 7.2.4.7 The total allowable overhead and profit shall not exceed 20% on any change orders.

§ 7.2.5 A Change Order signed by the Contractor indicates the Contractor's agreement therewith, including any adjustment in the Contractor Sum and Contract Time.

§ 7.2.6 Change Orders, whether initiated by the Contractor or Owner, shall include all adjustments to the Contract Sum and Contract Time resulting from the change in the Work. Except with the mutual agreement of the Owner, the Contractor shall not be permitted to reserve its right to recover additional time or money on account of Work that is included in a Change Order.

### § 7.3 CONSTRUCTION CHANGE DIRECTIVES

§ 7.3.1 A Construction Change Directive is a written order prepared by the Architect and signed by the Owner and Architect, directing a change in the Work prior to agreement on adjustment, if any, in the Contract Sum or Contract Time, or both. The Owner may by Construction Change Directive, without invalidating the Contract, order changes in the Work within the general scope of the Contract consisting of additions, deletions or other revisions, the Contract Sum and Contract Time being adjusted accordingly.

§ 7.3.2 A Construction Change Directive shall be used in the absence of total agreement on the terms of a Change Order.

§ 7.3.3 If the Construction Change Directive provides for an adjustment to the Contract Sum, the adjustment shall be based on one of the following methods:

- .1 mutual acceptance of a lump sum properly itemized and supported by sufficient substantiating data to permit evaluation;
  - .1.1 Such itemization shall include the quantity and unit cost of each item of material, and the number of hours worked and the hourly rate of each class of labor, as well as a description and amounts of all other costs sought by the Contractor to perform the proposed Change. The Contractor shall furnish to the Architect, bona fide proposals from Subcontractors and suppliers for all labor, materials, and equipment, to be incorporated into such Work. The Contractor, when requested, shall furnish in a form satisfactory to the Owner, itemized statements of the cost of Work, including, but not limited to certified payrolls and copies of accounts, bills and vouchers to permit evaluation.
  - .1.2 Allowable costs shall be in accordance with Section 7.2.3
  - .1.3 Allowance for overhead and profit shall be in accordance with Section 7.2.4.
- .2 unit prices stated in the Contract Documents or subsequently agreed upon;
- .3 cost to be determined in a manner agreed upon by the parties and an allowance for overhead and profit in accordance with Section 7.2.4.
- .4

Init.

§ 7.3.4 If unit prices are stated in the Contract Documents or subsequently agreed upon, and if quantities originally contemplated are materially changed in a proposed Change Order or Construction Change Directive so that application of such unit prices to quantities of Work proposed will cause substantial inequity to the Owner or Contractor, the applicable unit prices shall be equitably adjusted. **NO CHANGES MADE BUT THIS ONE WAS MOVED FROM A DIFFERENT ARTICLE IN THE 1997.**

§ 7.3.5 Upon receipt of a Construction Change Directive, the Contractor shall promptly proceed with the change in the Work involved and advise the Architect of the Contractor's agreement or disagreement with the method, if any, provided in the Construction Change Directive for determining the proposed adjustment in the Contract Sum or Contract Time.

§ 7.3.6 A Construction Change Directive signed by the Contractor indicates the Contractor's agreement therewith, including adjustment in Contract Sum and Contract Time or the method for determining them. Such agreement shall be effective immediately and shall be recorded as a Change Order.

§ 7.3.7

§ 7.3.8

§ 7.3.9 Pending final determination of the total cost of a Construction Change Directive to the Owner, the Contractor may not request payment for Work completed under the Construction Change Directive in Applications for Payment.

§ 7.3.10 When the Owner and Contractor agree with a determination made by the Architect concerning the adjustments in the Contract Sum and Contract Time, or otherwise reach agreement upon the adjustments, such agreement shall be effective immediately and the Architect will prepare a Change Order. Change Orders may be issued for all or any part of a Construction Change Directive.

#### § 7.4 MINOR CHANGES IN THE WORK

The Architect has authority to order minor changes in the Work not involving adjustment in the Contract Sum or extension of the Contract Time and not inconsistent with the intent of the Contract Documents. Such changes will be effected by written order signed by the Architect and shall be binding on the Owner and Contractor.

### ARTICLE 8 TIME

#### § 8.1 DEFINITIONS

§ 8.1.1 Unless otherwise provided, Contract Time is the period of time, including authorized adjustments, allotted in the Contract Documents for Substantial Completion of the Work.

§ 8.1.2 The date of commencement of the Work is the date established in the Agreement.

§ 8.1.3 The date of Substantial Completion is the date certified by the Architect in accordance with Section 9.8.

§ 8.1.4 The term "day" as used in the Contract Documents shall mean calendar day unless otherwise specifically defined.

#### § 8.2 PROGRESS AND COMPLETION

§ 8.2.1 Time limits stated in the Contract Documents are of the essence of the Contract. **The Contractor and Subcontractors shall perform and coordinate all Work without delay.** By executing the Agreement the Contractor confirms that it has reviewed the Contract Documents and the Contract Time is a reasonable period for performing the Work.

§ 8.2.2 The Contractor shall not prematurely commence operations on the site or elsewhere prior to the effective date of insurance required by Article 11 to be furnished by the Contractor and Owner. The date of commencement of the Work shall not be changed by the effective date of such insurance.

§ 8.2.3 The Contractor shall proceed expeditiously with adequate forces and shall achieve Substantial Completion within the Contract Time.

§ 8.2.4 Unless specifically required by law, no payment under the Contract shall become due until the Construction Schedule as described in Section 3.10 herein and in Specification Division 01 Section titled "CONSTRUCTION PROGRESS DOCUMENTATION" has been approved.

§ 8.2.5 If the Architect determines that the amount of Work properly completed for any phase is less than 90% of that Work required to be performed for that phase pursuant to the Construction Schedule, or that there have been delays to critical paths and that in the Owner's sole discretion, there is reasonable concern that one of the phased completion dates will not be met, or that the Project will not be Substantially Completed by the date described in the Agreement, the Owner may, in addition to any other remedy it may have direct the Contractor to submit a written description of the steps the Contractor intends to take to put the Project back on schedule. At the Owner's sole discretion, the Owner may also in addition to any other remedy it may have, direct the Contractor to take some or all of the following actions at no additional costs to the Owner (a) increase the number of workers in such quantities and trades as the Owner directs; (b) increase the number of working hours per shift, shifts per day, working days per week, amount of construction equipment, or any combination of the foregoing in addition with the Owner's direction; and/or (c) reschedule activities at the Owner's direction.

§ 8.2.6 Nothing contained herein shall limit the Owner's right to withhold or recover liquidated or other damages for delays caused by the Contractor or any other remedy in which the Owner is entitled pursuant to the Contract.

### § 8.3 DELAYS AND EXTENSIONS OF TIME

§ 8.3.1 If the Contractor is delayed at any time in the commencement or progress of the Work by an act or neglect of the Owner or Architect, or of an employee of either, or of a separate contractor employed by the Owner; or by changes ordered in the Work; or by labor disputes, fire, unusual delay in deliveries, unavoidable casualties or other causes beyond the Contractor's control; or by delay authorized by the Owner pending mediation and arbitration; or by other causes that the Architect determines may justify delay, then the Contract Time shall be extended by Change Order for such reasonable time as the Architect may determine. The Contractor shall have no claim for damages on account of any delay. The Contractor's sole remedy for any delay shall be an extension of time, provided that the Contractor complies with the Notice requirements contained in Section 15.1.2.

§ 8.3.2 Claims relating to time shall be made in accordance with applicable provisions of Article 15.

### § 8.3.3

§ 8.3.4 The Owner shall not extend the Contract Time due to a delay until all contract float is identified and used.

§ 8.3.5 No extension of time, or increase in the Contract Sum shall be granted because of seasonal or abnormal variations in temperature, humidity or precipitation, which conditions shall be wholly at the risk of the Contractor.

## ARTICLE 9 PAYMENTS AND COMPLETION

### § 9.1 CONTRACT SUM

The Contract Sum is stated in the Agreement and, including authorized adjustments, is the total amount payable by the Owner to the Contractor for performance of the Work under the Contract Documents.

## § 9.2 SCHEDULE OF VALUES

Where the Contract is based on a stipulated sum or Guaranteed Maximum Price, the Contractor shall submit to the Architect, before the first Application for Payment, a schedule of values allocating the entire Contract Sum to the various portions of the Work and prepared in such form and supported by such data to substantiate its accuracy as the Architect may require. This schedule, unless objected to by the Architect, shall be used as a basis for reviewing the Contractor's Applications for Payment. **If the Architect or subsequently determines that the schedule of values is inaccurate, the Contractor shall revise and resubmit schedule of values that is satisfactory to the Architect. No payment shall be made to the Contractor, unless the Schedule of Values has been approved by the Architect.**

## § 9.3 APPLICATIONS FOR PAYMENT

§ 9.3.1 At least ten days before the date established for each progress payment, the Contractor shall submit to the Architect an itemized Application for Payment prepared in accordance with the schedule of values, if required under Section 9.2., for completed portions of the Work. Such application shall be notarized, if required, and supported by such data substantiating the Contractor's right to payment as the Owner or Architect may require, such as copies of requisitions from Subcontractors and material suppliers, and shall reflect retainage if provided for in the Contract Documents. **In order to expedite monthly payment during the course of the Project, the Contractor shall review with the Architect a preliminary draft of each Application for Payment before final copies of the Application are formally submitted. The draft copy shall be typed and include the application date and application number. The draft copy shall include the total of each column and extension of each row on the Application as if this was the formal submission. The cover sheet shall include the Original Contract Sum and a summary of Changes to the Contract Sum, retainage, and payments to date as if this was the formal submission. The Architect shall then review the Contractor's formal notarized Application for Payment, supported by such data sustaining the Contractor's Application for Payment as the Owner or Architect may require, and verify in writing in accordance with Section 9.4 the total value of Work completed, including an allowance for the value of materials delivered and suitably stored at the site at the time of such Application. The Owner shall retain amounts described in Article 5 of the Form of Agreement as amended.**

**§ 9.3.1.1 As provided in Section 7.3.9., such applications may include requests for payment on account of changes in the Work that have been properly authorized by Construction Change Directives.**

§ 9.3.1.2 Applications for Payment shall not include requests for payment for portions of the Work for which the Contractor does not intend to pay a Subcontractor or material supplier, unless such Work has been performed by others whom the Contractor intends to pay.

§ 9.3.2 Unless otherwise provided in the Contract Documents, payments shall be made on account of materials and equipment delivered and suitably stored at the site for subsequent incorporation in the Work. If approved in advance by the Owner, payment may similarly be made for materials and equipment that are finished, ready for shipment, and suitably stored off the site at a location agreed upon in writing. Payment for materials and equipment stored on or off the site shall be conditioned upon compliance by the Contractor with procedures satisfactory to the Owner to establish the Owner's title to such materials and equipment or otherwise protect the Owner's interest, and shall include the costs of applicable insurance, storage and transportation to the site for such materials and equipment stored off the site. Services of the Architect or Project Manager required to verify compliance with these requirements, including costs of travel, shall be paid by the Contractor. Payment for materials stored off site shall be at the sole discretion of the Owner.

§ 9.3.2.1 In no case will payment be made for materials or equipment stored outside the United States.

§ 9.3.3 The Contractor warrants that title to all Work (including stored materials and equipment) covered by an Application for Payment will pass to the Owner either by incorporation into the Work or upon receipt of payment by the Contractor, whichever occurs first, free and clear of all claims, security interests or encumbrances.

§ 9.3.4 Each Application for Payment shall be on a form acceptable to the Owner and Architect and shall be accompanied by a certificate from each Subcontractor stating that the Subcontractor has been paid all amounts due the Subcontractor on the basis of all previous Applications for Payment.

Init.



## § 9.4 CERTIFICATES FOR PAYMENT

§ 9.4.1 Subject to the Owner's approval, the Architect will, either issue to the Owner a Certificate for Payment, with a copy to the Contractor, for such amount as the Architect determines is properly due, or notify the Contractor and Owner in writing of the Architect's reasons for withholding certification in whole or in part as provided in Section 9.5.1.

§ 9.4.2 The issuance of a Certificate for Payment will constitute a representation by the Architect to the Owner, based on the Architect's evaluation of the Work and the data comprising the Application for Payment, that, to the best of the Architect's knowledge, information and belief, the Work has progressed to the point indicated and that the quality of the Work is in accordance with the Contract Documents. The foregoing representations are subject to an evaluation of the Work for conformance with the Contract Documents upon Substantial Completion, to results of subsequent tests and inspections, to correction of minor deviations from the Contract Documents prior to completion and to specific qualifications expressed by the Architect. However, the issuance of a Certificate for Payment will not be a representation that the Architect has (1) made exhaustive or continuous on-site inspections to check the quality or quantity of the Work, (2) reviewed construction means, methods, techniques, sequences or procedures, (3) reviewed copies of requisitions received from Subcontractors and material suppliers and other data requested by the Owner to substantiate the Contractor's right to payment, or (4) made examination to ascertain how or for what purpose the Contractor has used money previously paid on account of the Contract Sum.

## § 9.5 DECISIONS TO WITHHOLD CERTIFICATION

§ 9.5.1 The Architect may withhold a Certificate for Payment in whole or in part, to the extent reasonably necessary to protect the Owner, if in the Architect's opinion the representations to the Owner required by Section 9.4.2 cannot be made. If the Architect is unable to certify payment in the amount of the Application, the Architect will notify the Contractor and Owner as provided in Section 9.4.1. If the Contractor and Architect cannot agree on a revised amount, the Architect will promptly issue a Certificate for Payment for the amount for which the Architect is able to make such representations to the Owner. The Architect may also withhold a Certificate for Payment or, because of subsequently discovered evidence, may nullify the whole or a part of a Certificate for Payment previously issued, to such extent as may be necessary in the Architect's opinion to protect the Owner from loss for which the Contractor is responsible, including loss resulting from acts and omissions described in Section 3.3.2, because of

- .1 defective Work not remedied;
- .2 third party claims filed or reasonable evidence indicating probable filing of such claims unless security acceptable to the Owner is provided by the Contractor;
- .3 failure of the Contractor to make payments properly to Subcontractors or for labor, materials or equipment;
- .4 reasonable evidence that the Work cannot be completed for the unpaid balance of the Contract Sum;
- .5 damage to the Owner or a separate contractor;
- .6 reasonable evidence that the Work will not be completed within the Contract Time, and that the unpaid balance would not be adequate to cover actual or liquidated damages for the anticipated delay; or
- .7 repeated failure to carry out the Work in accordance with the Contract Documents.
- .8 **failure to comply with mandatory requirements for maintaining record drawings per Division 01 Specification Section titled "Project PROJECT RECORD DOCUMENTS". The Contractor shall confirm in writing, with each monthly Application for Payment, that the Contractor has checked the record drawings and that they accurately describe the work in place;**
- .9 **costs incurred by the Owner as described under Section 10.2.5; or**
- .10 **liquidated damages incurred by the Owner pursuant to Article 3 of the Form of Agreement as amended.**

§ 9.5.2 When the above reasons for withholding certification are removed, certification will be made for amounts previously withheld.

§ 9.5.3 If the Architect withholds certification for payment under Section 9.5.1.3, the Owner may, at its sole option, issue joint checks to the Contractor and to any Subcontractor or material or equipment suppliers to whom the Contractor failed to make payment for Work properly performed or material or equipment suitably delivered. If the

Init.

Owner makes payments by joint check, the Owner shall notify the Architect and the Architect will reflect such payment on the next Certificate for Payment.

## § 9.6 PROGRESS PAYMENTS

§ 9.6.1 After the Architect has issued a Certificate for Payment, the Owner **provided it first approves the Certificate of Payment**, shall make payment in the manner and within the time provided in the Contract Documents, and shall so notify the Architect.

§ 9.6.2 The Contractor shall pay each Subcontractor no later than seven days after receipt of payment from the Owner the amount to which the Subcontractor is entitled, reflecting percentages actually retained from payments to the Contractor on account of the Subcontractor's portion of the Work. The Contractor shall, by appropriate agreement with each Subcontractor, require each Subcontractor to make payments to Sub-subcontractors in a similar manner.

§ 9.6.3 The Architect will, on request, furnish to a Subcontractor, if practicable, information regarding percentages of completion or amounts applied for by the Contractor and action taken thereon by the Architect and Owner on account of portions of the Work done by such Subcontractor.

§ 9.6.4 The Owner has the right to request written evidence from the Contractor that the Contractor has properly paid Subcontractors and material and equipment suppliers amounts paid by the Owner to the Contractor for subcontracted Work. If the Contractor fails to furnish such evidence within seven days, the Owner shall have the right to contact Subcontractors to ascertain whether they have been properly paid. Neither the Owner nor Architect shall have an obligation to pay or to see to the payment of money to a Subcontractor, except as may otherwise be required by law.

§ 9.6.5 Contractor payments to material and equipment suppliers shall be treated in a manner similar to that provided in Sections 9.6.2, 9.6.3 and 9.6.4.

§ 9.6.6 A Certificate for Payment, a progress payment, or partial or entire use or occupancy of the Project by the Owner shall not constitute acceptance of Work not in accordance with the Contract Documents.

*(Paragraphs deleted)*

## § 9.8 SUBSTANTIAL COMPLETION

§ 9.8.1 Substantial Completion is the stage in the progress of the Work when the Work or designated portion thereof is sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work for its intended use **and only minor items which can be corrected or completed without any material interference with the Owner's use of the Work remain to be corrected or completed.**

§ 9.8.2 When the Contractor considers that the Work, or a portion thereof which the Owner agrees to accept separately, is substantially complete, the Contractor shall prepare and submit to the Architect a comprehensive list of items to be completed or corrected prior to final payment. Failure to include an item on such list does not alter the responsibility of the Contractor to complete all Work in accordance with the Contract Documents.

§ 9.8.3 Upon receipt of the Contractor's list, the Architect **with the input of the Owner** will make an inspection to determine whether the Work or designated portion thereof is substantially complete. If the Architect's inspection discloses any item, whether or not included on the Contractor's list, which is not sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work or designated portion thereof for its intended use, the Contractor shall, before issuance of the Certificate of Substantial Completion, complete or correct such item upon notification by the Architect. In such case, the Contractor shall then submit a request for another inspection by the Architect to determine Substantial Completion.

§ 9.8.4 When the Work or designated portion thereof is **determined by the Architect to be** substantially complete, the Architect will prepare a Certificate of Substantial Completion which shall establish the date of Substantial Completion, shall establish responsibilities of the Owner and Contractor for security, maintenance, heat, utilities, damage to the Work and insurance, and shall fix the time within which the Contractor shall finish all items on the list accompanying the Certificate. **The Contractor shall promptly proceed to complete or correct the Work on this list.** Warranties required by the Contract Documents shall commence on the date of Substantial Completion of the Work or designated portion thereof unless otherwise provided in the Certificate of Substantial Completion.

§ 9.8.5 The Certificate of Substantial Completion shall be submitted to the Owner and Contractor for their written acceptance of responsibilities assigned to them in such Certificate. Upon such acceptance and consent of surety, if any, the Owner shall make payment of retainage applying to such Work or designated portion thereof. Such payment shall be adjusted for Work that is incomplete or not in accordance with the requirements of the Contract Documents.

#### § 9.9 PARTIAL OCCUPANCY OR USE

§ 9.9.1 The Owner may occupy or use any completed or partially completed portion of the Work at any stage when such portion is designated by separate agreement with the Contractor, provided such occupancy or use is consented to by the insurer as required under Section 11.3.1.5 and authorized by public authorities having jurisdiction over the Project. Such partial occupancy or use may commence whether or not the portion is substantially complete, provided the Owner and Contractor have accepted in writing the responsibilities assigned to each of them for payments, retainage, if any, security, maintenance, heat, utilities, damage to the Work and insurance, and have agreed in writing concerning the period for correction of the Work and commencement of warranties required by the Contract Documents. When the Contractor considers a portion substantially complete, the Contractor shall prepare and submit a list to the Architect as provided under Section 9.8.2. Consent of the Contractor to partial occupancy or use shall not be unreasonably withheld. The stage of the progress of the Work shall be determined by written agreement between the Owner and Contractor or, if no agreement is reached, by decision of the Architect.

§ 9.9.2 Immediately prior to such partial occupancy or use, the Owner, Contractor and Architect shall jointly inspect the area to be occupied or portion of the Work to be used in order to determine and record the condition of the Work.

§ 9.9.3 Unless otherwise agreed upon, partial occupancy or use of a portion or portions of the Work shall not constitute acceptance of Work not complying with the requirements of the Contract Documents.

#### § 9.10 FINAL COMPLETION AND FINAL PAYMENT

§ 9.10.1 Upon receipt of the Contractor's written notice that the Work is ready for final inspection and acceptance and upon receipt of a final Application for Payment, the Architect, **and Owner** will promptly make such inspection and, when the Architect, **and Owner** finds the Work acceptable under the Contract Documents and the Contract fully performed, the Architect will promptly issue a final Certificate for Payment stating that to the best of the Architect's knowledge, information and belief, and on the basis of the Architect's on-site visits and inspections, the Work has been completed in accordance with terms and conditions of the Contract Documents and that the entire balance found to be due the Contractor and noted in the final Certificate is due **the Contractor**.

§ 9.10.2 Neither final payment nor any remaining retained percentage shall become due until the Contractor submits to the Architect (1) an affidavit that payrolls, bills for materials and equipment, and other indebtedness connected with the Work for which the Owner or the Owner's property might be responsible or encumbered (less amounts withheld by Owner) have been paid or otherwise satisfied, (2) a certificate evidencing that insurance required by the Contract Documents to remain in force after final payment is currently in effect and will not be canceled or allowed to expire until at least 30 days' prior written notice has been given to the Owner, (3) a written statement that the Contractor knows of no substantial reason that the insurance will not be renewable to cover the period required by the Contract Documents, (4) consent of surety, if any, to final payment and (5), if required by the Owner, other data establishing payment or satisfaction of obligations, such as receipts, releases and waivers of liens, claims, security interests or encumbrances arising out of the Contract, to the extent and in such form as may be designated by the Owner. If a Subcontractor refuses to furnish a release or waiver required by the Owner, the Contractor may furnish a bond satisfactory to the Owner to indemnify the Owner against such lien. If such lien remains unsatisfied after payments are made, the Contractor shall refund to the Owner all money that the Owner may be compelled to pay in discharging such lien, including all costs and reasonable attorneys' fees.

§ 9.10.3 If, after Substantial Completion of the Work, final completion thereof is materially delayed through no fault of the Contractor or by issuance of Change Orders affecting final completion, and the Architect so confirms, the Owner shall, upon application by the Contractor and certification by the Architect, and without terminating the Contract, make payment of the balance due for that portion of the Work fully completed and accepted. If the remaining balance for Work not fully completed or corrected is less than retainage stipulated in the Contract Documents, and if bonds have been furnished, the written consent of surety to payment of the balance due for that portion of the Work fully completed and accepted shall be submitted by the Contractor to the Architect prior to certification of such payment. Such payment shall be made under terms and conditions governing final payment, except that it shall not constitute a waiver of claims.

§ 9.10.4 The making of final payment shall constitute a waiver of Claims by the Owner except those arising from

- .1 liens, Claims, security interests or encumbrances arising out of the Contract and unsettled;
- .2 failure of the Work to comply with the requirements of the Contract Documents; or
- .3 terms of special warranties required by the Contract Documents.

§ 9.10.5 Acceptance of final payment by the Contractor, a Subcontractor or material supplier shall constitute a waiver of claims by that payee except those previously made in writing and identified by that payee as unsettled at the time of final Application for Payment.

## ARTICLE 10 PROTECTION OF PERSONS AND PROPERTY

### § 10.1 SAFETY PRECAUTIONS AND PROGRAMS

The Contractor shall be responsible for initiating, maintaining and supervising all safety precautions and programs in connection with the performance of the Contract.

### § 10.2 SAFETY OF PERSONS AND PROPERTY

§ 10.2.1 The Contractor shall take reasonable precautions for safety of, and shall provide reasonable protection to prevent damage, injury or loss to

- .1 employees on the Work and other persons who may be affected thereby;
- .2 the Work and materials and equipment to be incorporated therein, whether in storage on or off the site, under care, custody or control of the Contractor or the Contractor's Subcontractors or Sub-subcontractors; and
- .3 other property at the site or adjacent thereto, such as trees, shrubs, lawns, walks, pavements, roadways, structures and utilities not designated for removal, relocation or replacement in the course of construction.

§ 10.2.2 The Contractor shall comply with and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities bearing on safety of persons or property or their protection from damage, injury or loss.

§ 10.2.3 The Contractor shall erect and maintain, as required by existing conditions and performance of the Contract, reasonable safeguards for safety and protection, including posting danger signs and other warnings against hazards, promulgating safety regulations and notifying owners and users of adjacent sites and utilities.

§ 10.2.4 When use or storage of explosives or other hazardous materials or equipment or unusual methods are necessary for execution of the Work, the Contractor shall exercise utmost care and carry on such activities under supervision of properly qualified personnel.

§ 10.2.5 The Contractor shall promptly remedy damage and loss (other than damage or loss insured under property insurance required by the Contract Documents) to property referred to in Sections 10.2.1.2 and 10.2.1.3 caused in whole or in part by the Contractor, a Subcontractor, a Sub-subcontractor, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable and for which the Contractor is responsible under Sections 10.2.1.2 and 10.2.1.3, except damage or loss attributable to acts or omissions of the Owner or Architect or anyone directly or indirectly employed by either of them, or by anyone for whose acts either of them may be liable, and not attributable to the fault or negligence of the Contractor. The foregoing obligations of the Contractor are in

Init.

addition to the Contractor's obligations under Section 3.18. Where the damage or loss presents an immediate danger to the public, the Owner, in its sole discretion and at the Contractor's expense, may promptly remedy such damage or loss without prior notice to the Contractor.

§ 10.2.6 The Contractor shall designate a responsible member of the Contractor's organization at the site whose duty shall be the prevention of accidents. This person shall be the Contractor's superintendent unless otherwise designated by the Contractor in writing to the Owner and Architect.

§ 10.2.7 The Contractor shall not permit any part of the construction or site to be loaded so as to cause damage or create an unsafe condition.

**§ 10.2.8**

The Contractor shall be responsible for the adequate strength and safety of all scaffolding, staging and hoisting equipment and for temporary shoring, bracing and tying.

§ 10.2.9 The Contractor shall provide approved hard hats, other personal protective equipment as required, approved first aid supplies, name of first aid attendant and a posted list of emergency facilities.

§ 10.2.10 The Contractor shall take immediate action to correct any dangerous conditions that result from the reopening of any portion of the Work.

§ 10.2.11 No visitors shall be allowed on the work site without permission from the Owner .

§ 10.2.12 The Contractor shall comply with the requirements of the Occupational Safety and Health Act and the Construction Safety Act of 1969, which are incorporated hereby by reference, and all standard and regulations promulgated by the governmental and regulatory bodies responsible for administration thereof. The Contractor shall be responsible for compliance with such Acts, standards and regulation by its officers, agents, employees, Subcontractors, Sub-subcontractors, suppliers and materialmen. All employees at the worksite shall have successfully completed a course in construction safety and health approved by the United States Occupational Safety and Health Administration that is at least 10 hours in duration at the time the employee begins work. The Contractor and all Subcontractors shall furnish documentation of successful completion of said course with the first certified payroll report for each employee. The Contractor shall indemnify and hold harmless the Owner from any and all fines, costs and expenses, including but not limited to reasonable attorney's fees, incurred by Owner due to the Contractor's violation of such Acts, standards and/or regulations. Such indemnity shall not be construed to limit the indemnity required under Subparagraph 3.18.1.

§ 10.2.13 In the event the Owner determines that conditions present an immediate danger, the Owner shall have the right but not the obligation to suspend the Work in the unsafe area immediately upon its discovery. All costs of any nature (including without limitation, overtime pay, acceleration, liquidated damages or other costs arising out of delays) resulting from the suspension by whomever incurred, shall be paid by the Contractor.

**§ 10.2.14 INJURY OR DAMAGE TO PERSON OR PROPERTY**

If either party suffers injury or damage to person or property because of an act or omission of the other party, or of others for whose acts such party is legally responsible, written notice of such injury or damage, whether or not insured, shall be given to the other party within a reasonable time not exceeding 21 days after discovery. The notice shall provide sufficient detail to enable the other party to investigate the matter.

**§ 10.2.15 MOLD GROWTH**

The Contractor shall establish and maintain a program and safeguards to prevent growth of mold.

**§ 10.3 HAZARDOUS MATERIALS**

§ 10.3.1 The Contractor is responsible for compliance with any requirements included in the Contract Documents regarding hazardous materials. If the Contractor encounters a hazardous material or substance not addressed in the Contract Documents and if reasonable precautions will be inadequate to prevent foreseeable bodily injury or death

Init.

to persons resulting from a material or substance, including but not limited to asbestos or polychlorinated biphenyl (PCB), encountered on the site by the Contractor, the Contractor shall, upon recognizing the condition, immediately stop Work in the affected area and report the condition to the Owner and Architect in writing. **If the Contractor encounters on the site any material or substance which is considered to be a biological pollutant, or is classified as hazardous under any federal, state or local law or regulations, or any underground storage tank, the Contractor shall immediately stop work in the affected area and report the condition to the Owner and the Architect for appropriate action. The Contractor shall comply with all applicable federal, state, and local environmental laws regarding the use, handling, transportation and disposal of oil, hazardous waste or hazardous substances.**

§ 10.3.2 Upon receipt of the Contractor's written notice, the Owner shall obtain the services of a licensed laboratory to verify the presence or absence of the material or substance reported by the Contractor and, in the event such material or substance is found to be present, to cause it to be rendered harmless. Unless otherwise required by the Contract Documents, the Owner shall furnish in writing to the Contractor and Architect the names and qualifications of persons or entities who are to perform tests verifying the presence or absence of such material or substance or who are to perform the task of removal or safe containment of such material or substance. The Contractor and the Architect will promptly reply to the Owner in writing stating whether or not either has reasonable objection to the persons or entities proposed by the Owner. If either the Contractor or Architect has an objection to a person or entity proposed by the Owner, the Owner shall propose another to whom the Contractor and the Architect have no reasonable objection. When the material or substance has been rendered harmless, Work in the affected area shall resume upon written agreement of the Owner and Contractor. By Change Order, the Contract Time shall be extended appropriately and the Contract Sum shall be increased in the amount of the Contractor's reasonable additional costs of shut-down, delay and start-up.

§ 10.3.3 To the fullest extent permitted by law, the Owner shall indemnify and hold harmless the Contractor, Subcontractors, Architect, Architect's consultants and agents and employees of any of them from and against claims, damages, losses and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work in the affected area if in fact the material or substance presents the risk of bodily injury or death as described in Section 10.3.1 and has not been rendered harmless, provided that such claim, damage, loss or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself), except to the extent that such damage, loss or expense is due to the fault or negligence of the party seeking indemnity.

§ 10.3.4 The Owner shall not be responsible under this Section 10.3 for materials or substances the Contractor brings to the site unless such materials or substances are required by the Contract Documents. The Owner shall be responsible for materials or substances required by the Contract Documents, except to the extent of the Contractor's fault or negligence in the use and handling of such materials or substances.

§ 10.3.5 The Contractor shall indemnify the Owner for the cost and expense the Owner incurs (1) for remediation of a material or substance the Contractor brings to the site and negligently handles, or (2) where the Contractor fails to perform its obligations under Section 10.3.1, except to the extent that the cost and expense are due to the Owner's fault or negligence.

§ 10.3.6 If, without negligence on the part of the Contractor, the Contractor is held liable by a government agency for the cost of remediation of a hazardous material or substance solely by reason of performing Work as required by the Contract Documents, the Owner shall indemnify the Contractor for all cost and expense thereby incurred.

## § 10.4 EMERGENCIES

In an emergency affecting safety of persons or property, the Contractor shall act, at the Contractor's discretion, to prevent threatened damage, injury or loss. Additional compensation or extension of time claimed by the Contractor on account of an emergency shall be determined as provided in Article 15 and Article 7.

## ARTICLE 11 INSURANCE AND BONDS

### § 11.1 CONTRACTOR'S LIABILITY INSURANCE

§ 11.1.1 The Contractor shall purchase from and maintain in a company or companies lawfully authorized to do business in the jurisdiction in which the Project is located such insurance as will protect the Contractor from claims set forth below which may arise out of or result from the Contractor's operations and completed operations under the Contract and for which the Contractor may be legally liable, whether such operations be by the Contractor or by a Subcontractor or by anyone directly or indirectly employed by any of them, or by anyone for whose acts any of them may be liable:

- .1 Claims under workers' compensation, disability benefit and other similar employee benefit acts that are applicable to the Work to be performed;
- .2 Claims for damages because of bodily injury, occupational sickness or disease, or death of the Contractor's employees;
- .3 Claims for damages because of bodily injury, sickness or disease, or death of any person other than the Contractor's employees;
- .4 Claims for damages insured by usual personal injury liability coverage;
- .5 Claims for damages, other than to the Work itself, because of injury to or destruction of tangible property, including loss of use resulting therefrom;
- .6 Claims for damages because of bodily injury, death of a person or property damage arising out of ownership, maintenance or use of a motor vehicle;
- .7 Claims for bodily injury or property damage arising out of completed operations; and
- .8 Claims involving contractual liability insurance applicable to the Contractor's obligations under Section 3.18.

§ 11.1.2 The insurance required by Section 11.1.1 shall be written for not less than limits of liability specified in the Contract Documents or required by law, whichever coverage is greater. **All insurances shall be written on an occurrence basis unless the Owner approves in writing coverage on a claims made basis.** Coverages, whether written on an occurrence or claims-made basis, shall be maintained without interruption from the date of commencement of the Work until the date of final payment and termination of any coverage required to be maintained after final payment **and without limitation of the foregoing, shall be written with minimum coverages as follows:**

The Vendor/Contractor shall agree to maintain in force, at all times during which services are to be performed, the following coverages placed with company (ies) licensed by the State of Connecticut which have at least an "A"-VIII policyholders' rating according to BEST Publication's latest edition Key Rating Guide:

- .1 Workers' Compensation: Coverage A – Statutory; Coverage B - \$500,00 per insuring Agreement
- .2 Commercial General Liability
  - a.) Worker's Compensation
  - b.) Employer's Liability
- c.) Commercial General Liability Insurance: Written on an occurrence basis, with general aggregate limit applicable to this Project only:

|   |                           |
|---|---------------------------|
| Each Occurance                              | \$1,000,000 per Occurance |
| Fire Property Damage                        |                           |
| Medical Expenses (any one person)           | \$10,000                  |
| Personal and Adv. Injury                    | \$1,000,000               |
| General Aggregate                           | \$1,000,000               |
| Products and Completed Operations Aggregate | \$3,000,000               |
- d.) Automobile Liability (owned, non-owned, and hired vehicles):

|               |                        |
|---------------|------------------------|
| Bodily Injury | \$1,000,000 per Person |
|---------------|------------------------|

|                        |  |
|------------------------|--|
|                        | \$1,000,000 per Accident   |
| Property Damage        | \$1,000,000 per Accident   |
| Combined Single Limit  | \$1,000,000 per Accident   |
| e.) Umbrella Insurance | \$1,000,000 each Occurance<br>\$5,000,000 Aggregate  |
| f.) Additional Terms:  |  |
| i.)                    | General Aggregate must apply solely to the Project;  |
| ii.)                   | Products and Completed Operations coverage must continue for 12 months beyond the date of acceptance of the Project by the Owner;                    |
| iii.)                  | The Owner, Architect and the School Building Committee shall be added as additional insureds, with the Owner named as loss payee on all policies;    |
| iv.)                   | The Contractor shall provide the Owner with thirty (30) days written notice of cancellation, non-renewal of coverage or material change of coverage. |

**§ 11.1.3** Certificates of insurance acceptable to the Owner confirming the insurance coverage required by Section 11.1 shall be filed with the Owner prior to the execution of the Contract, and thereafter upon renewal or replacement of each required policy of insurance. The Owner shall have no obligation to execute the Contract, and may award the Contract to the next lowest responsible and eligible bidder, if such insurance certificates have not been provided to the Owner within five (5) business days after presentation of the Contract to Contractor for execution. These certificates and the insurance policies required by this Section 11.1 shall contain a provision that coverages afforded under the policies will not be canceled or allowed to expire until at least 30 days' prior written notice has been given to the Owner. These certificates shall set forth evidence of all coverage required by Sections 11.1.1 and 11.1.2. The form of certificate shall be the ACCORD form, supplemented as necessary by AIA Documents G715. The Contractor shall furnish to the Owner copies of any endorsement that are subsequently issued amending limits of coverage. An additional certificate evidencing continuation of liability coverage, including coverage for completed operations, shall be submitted with the final Application for Payment as required by Section 9.10.2 and thereafter upon renewal or replacement of such coverage until the expiration of the time required by Section 11.1.2. Information concerning reduction of coverage on account of revised limits or claims paid under the General Aggregate, or both, shall be furnished by the Contractor with reasonable promptness.

**§ 11.1.4** The Contractor shall cause the commercial liability coverage required by the Contract Documents to include (1) the Owner, the Architect and the Architect's Consultants as additional insureds for claims caused in whole or in part by the Contractor's negligent acts or omissions during the Contractor's operations; and (2) the Owner as an additional insured for claims caused in whole or in part by the Contractor's negligent acts or omissions during the Contractor's completed operations.

**§ 11.1.5** Neither the Owner's authority to review certificate and policies of insurance, nor their decision to raise or not to raise any objections about those certificates and policies, shall in any way give rise to any duty or responsibility on the part of the Owner to exercise this authority for the benefit of the Contractor, any Subcontractor, Sub-subcontractor or supplier, or any other party.

**§ 11.1.6** The Contractor's liability insurance shall remain in effect until the end of the Correction period as defined in Article 12 and in Division 01, General Requirements, and at all times that when the Contractor may be correcting, removing or replacing defective Work.

**§ 11.2 OWNER'S LIABILITY INSURANCE**

The Contractor shall procure and pay for an Owner's policy of Owner's Protective Liability Insurance insuring the Owner and its officers, employees and agents, the Architect and the Architect's Consultants against claims arising from or relating to the Contract.

**§ 11.3 PROPERTY INSURANCE**

**§ 11.3.1** The Contractor shall purchase and maintain property insurance upon the entire Work at the site to the full insurable value thereof. Coverage for such property insurance shall be provided by a company or companies reasonably acceptable to the Owner and which have, and shall maintain throughout the pendency of this contract, a minimum financial rating of not less the A+ according to A.M. Best or AAA according to

Init.



Moody's. Contractor shall furnish to Owner written confirmation as to the insurance carrier's most current financial ratings prior to commencing work. Such insurance shall include the interests of the Owner, the Contractor, Subcontractors and Sub-subcontractors in the work and shall insure against the perils of fire and extended coverage and shall include "all risks" insurance for physical loss or damage including with duplication, theft, vandalism and malicious mischief. This insurance shall also cover portions of the Work stored off the site or in transit. If this insurance is written with stipulated amounts deductible, the Owner shall not be responsible for any difference between the payments made by the insurance carrier and the claim. The policy shall contain a provision that coverages afforded under policies will not be canceled or allowed to expire until at least 30 days' written notice has been given to the Owner. The Owner shall be named insured within the policy. The Contractor shall provide a copy of Builder's Risk insurance policy to the Owner and the Architect before commencing performance of the Contract. The Contractor shall require the insurance company to provide the Owner and the Architect a minimum of 30 day notice prior to cancellation of the Policy.

§ 11.3.1.1 Property insurance shall be on an "all-risk" or equivalent policy form and shall include, without limitation, insurance against the perils of fire (with extended coverage) and physical loss or damage including, without duplication of coverage, theft, vandalism, malicious mischief, collapse, earthquake, flood, windstorm, falsework, testing and startup, temporary buildings and debris removal including demolition occasioned by enforcement of any applicable legal requirements, and shall cover reasonable compensation for Architect's and Contractor's services and expenses required as a result of such insured loss.

§ 11.3.1.2

§ 11.3.1.3

§ 11.3.1.4

§ 11.3.1.5 Partial occupancy or use in accordance with Section 9.9 shall not commence until the insurance company or companies providing property insurance have consented to such partial occupancy or use by endorsement or otherwise. The Owner and the Contractor shall take reasonable steps to obtain consent of the insurance company or companies and shall, without mutual written consent, take no action with respect to partial occupancy or use that would cause cancellation, lapse or reduction of insurance.

#### § 11.3.2 BOILER AND MACHINERY INSURANCE

The Contractor shall purchase and maintain boiler and machinery insurance required by the Contract Documents or by law, which shall specifically cover such insured objects during installation and until final acceptance by the Owner; this insurance shall include interests of the Owner, Contractor, Subcontractors and Sub-subcontractors in the Work, and the Owner and Contractor shall be named insureds

#### § 11.3.3 LOSS OF USE INSURANCE

The Owner, at the Owner's option, may purchase and maintain such insurance as will insure the Owner against loss of use of the Owner's property due to fire or other hazards

§ 11.3.4

§ 11.3.5 If during the Project construction period the Owner insures properties, real or personal or both, at or adjacent to the site by property insurance under policies separate from those insuring the Project, or if after final payment property insurance is to be provided on the completed Project through a policy or policies other than those insuring the Project during the construction period, the Owner shall waive all rights in accordance with the terms of Section 11.3.7 for damages caused by fire or other causes of loss covered by this separate property insurance. All separate policies shall provide this waiver of subrogation by endorsement or otherwise.

§ 11.3.6 The Contractor shall file two certified copies of all policies and Certificates of Insurance with the Owner prior to execution of the Contract.

Init.

### § 11.3.7 WAIVERS OF SUBROGATION

The Owner and Contractor waive all rights against (1) each other and any of their subcontractors, sub-subcontractors, agents and employees, each of the other, and (2) the Architect, Architect's consultants, separate contractors described in Article 6, if any, and any of their subcontractors, sub-subcontractors, agents and employees, for damages caused by fire or other causes of loss to the extent covered by property insurance obtained pursuant to this Section 11.3 or other property insurance applicable to the Work, except such rights as they have to proceeds of such insurance held by the Owner as fiduciary. The Owner or Contractor, as appropriate, shall require of the Architect, Architect's consultants, separate contractors described in Article 6, if any, and the subcontractors, sub-subcontractors, agents and employees of any of them, by appropriate agreements, written where legally required for validity, similar waivers each in favor of other parties enumerated herein. The policies shall provide such waivers of subrogation by endorsement or otherwise. A waiver of subrogation shall be effective as to a person or entity even though that person or entity would otherwise have a duty of indemnification, contractual or otherwise, did not pay the insurance premium directly or indirectly, and whether or not the person or entity had an insurable interest in the property damaged.

**§ 11.3.8** A loss insured under the Contractor's property insurance shall be adjusted by the Owner and made payable to the Owner as fiduciary for the insureds, as their interests may appear, subject to requirements of any applicable mortgagee clause and of Section 11.3.10. The Contractor shall pay Subcontractors their just shares of insurance proceeds received by the Contractor, and by appropriate agreements, written where legally required for validity, shall require Subcontractors to make payments to their Sub-subcontractors in similar manner.

### § 11.3.9

**§ 11.3.10** The Owner shall have power to adjust and settle any loss with insurers for which the Contractor has obtained insurance.

**§ 11.3.11** Upon the occurrence of an insured loss, the Owner and Contractor shall cooperate with each other and with each other's insurer in the submission of claims and related information and the distribution of any insurance proceeds. If, after such a loss no other special agreement is made, replacement of damaged Work shall be covered by an appropriate Change Order.

### § 11.4 PERFORMANCE BOND AND PAYMENT BOND

**§ 11.4.1** The Contractor shall furnish bonds covering faithful performance of the Contract and payment of obligations arising thereunder as stipulated in bidding requirements or specifically required in the Contract Documents on the date of execution of the Contract

**§ 11.4.2** Upon the request of any person or entity appearing to be a potential beneficiary of bonds covering payment of obligations arising under the Contract, the Contractor shall promptly furnish a copy of the bonds or shall authorize a copy to be furnished.

## ARTICLE 12 UNCOVERING AND CORRECTION OF WORK

### § 12.1 UNCOVERING OF WORK

**§ 12.1.1** If a portion of the Work is covered contrary to the Architect's request or to requirements specifically expressed in the Contract Documents, it must, if requested in writing by the Architect, be uncovered for the Architect's examination and be replaced at the Contractor's expense without change in the Contract Time.

**§ 12.1.2** If a portion of the Work has been covered that the Architect has not specifically requested to examine prior to its being covered, the Architect may request to see such Work and it shall be uncovered by the Contractor. If such Work is in accordance with the Contract Documents, costs of uncovering and replacement shall, by appropriate Change Order, be at the Owner's expense. If such Work is not in accordance with the Contract Documents, such costs and the cost of correction shall be at the Contractor's expense unless the condition was caused by the Owner or a separate contractor in which event the Owner shall be responsible for payment of such costs.

### § 12.2 CORRECTION OF WORK

#### § 12.2.1 BEFORE OR AFTER SUBSTANTIAL COMPLETION

The Contractor shall promptly correct Work rejected by the Architect or failing to conform to the requirements of the Contract Documents, whether discovered before or after Substantial Completion and whether or not fabricated, installed or completed. Costs of correcting such rejected Work, including additional testing and inspections, the cost

Init.

of uncovering and replacement, and compensation for the Architect's services and expenses made necessary thereby, **and any cost, loss or damages to the Owner resulting from such non-conformance** shall be at the Contractor's expense.

#### § 12.2.2 AFTER SUBSTANTIAL COMPLETION

§ 12.2.2.1 In addition to the Contractor's obligations under Section 3.5, if, within one year after the date of Substantial Completion of the Work or designated portion thereof or after the date for commencement of warranties established under Section 9.9.1, or by terms of an applicable special warranty required by the Contract Documents, any of the Work is found to be not in accordance with the requirements of the Contract Documents, the Contractor shall correct it promptly after receipt of written notice from the Owner to do so unless the Owner has previously given the Contractor a written acceptance of such condition. The Owner shall give such notice promptly after discovery of the condition. If the Contractor fails to correct nonconforming Work within a reasonable time during that period after receipt of notice from the Owner or Architect, the Owner may correct it in accordance with Section 2.4.

§ 12.2.2.1.1 However, if the correction or repair of this Work is required to avoid impacts to the maintenance, operation or safety of the facilities, the Owner reserves the right to undertake the repairs, prior to notifying the Contractor or without waiting for the Contractor to respond, without waiving the Owner's right under the warranties and Owner's right to correct Work under Section 2.4. The Contractor shall notify the Owner and Architect in writing sixty (60) days prior to the end of the one (1) year period for correction of work that sixty (60) days remain in the applicable warranty period.

§ 12.2.2.2 The one-year period for correction of Work shall be extended with respect to portions of Work first performed after Substantial Completion by the period of time between Substantial Completion and the actual completion of that portion of the Work.

§ 12.2.2.3 The one-year period for correction of Work shall not be extended by corrective Work performed by the Contractor pursuant to this Section 12.2.

§ 12.2.3 The Contractor shall remove from the site portions of the Work that are not in accordance with the requirements of the Contract Documents and are neither corrected by the Contractor nor accepted by the Owner.

§ 12.2.4 The Contractor shall bear the cost of correcting destroyed or damaged construction, whether completed or partially completed, of the Owner or separate contractors caused by the Contractor's correction or removal of Work that is not in accordance with the requirements of the Contract Documents.

§ 12.2.5 Nothing contained in this Section 12.2 shall be construed to establish a period of limitation with respect to other obligations the Contractor or its surety has under the Contract Documents. Establishment of the one-year period for correction of Work as described in Section 12.2.2 relates only to the specific obligation of the Contractor to correct the Work, and has no relationship to the time within which the obligation to comply with the Contract Documents may be sought to be enforced, nor to the time within which proceedings may be commenced to establish the Contractor's liability with respect to the Contractor's obligations other than specifically to correct the Work.

#### § 12.3 ACCEPTANCE OF NONCONFORMING WORK

If the Owner prefers to accept Work that is not in accordance with the requirements of the Contract Documents, the Owner may do so instead of requiring its removal and correction, in which case the Contract Sum will be reduced as appropriate and equitable. **The Owner's acceptance of Work under this provision must be in writing, signed by the Owner's authorized representative identified in Article 7 of the parties' AIA A101 Form of Agreement as amended. No acceptance by any other person or entity is authorized.** Such adjustment shall be effected whether or not final payment has been made.

### ARTICLE 13 MISCELLANEOUS PROVISIONS

#### § 13.1 GOVERNING LAW

The Contract shall be governed by the law of the place where the Project is located.

Init.

## § 13.2 SUCCESSORS AND ASSIGNS

§ 13.2.1 The Owner and Contractor respectively bind themselves, their partners, successors, assigns and legal representatives to covenants, agreements and obligations contained in the Contract Documents. Except as provided in Section 13.2.2, neither party to the Contract shall assign the Contract as a whole without written consent of the other. If either party attempts to make such an assignment without such consent, that party shall nevertheless remain legally responsible for all obligations under the Contract.

§ 13.2.2 The Owner may, without consent of the Contractor, assign the Contract to a lender providing construction financing for the Project, if the lender assumes the Owner's rights and obligations under the Contract Documents. The Contractor shall execute all consents reasonably required to facilitate such assignment.

## § 13.3 WRITTEN NOTICE

Written notice shall be deemed to have been duly served if delivered in person to the individual, to a member of the firm or entity, or to an officer of the corporation for which it was intended; or if delivered at, or sent by registered or certified mail or by courier service providing proof of delivery to, the last business address known to the party giving notice

## § 13.4 RIGHTS AND REMEDIES

§ 13.4.1 Duties and obligations imposed by the Contract Documents and rights and remedies available thereunder shall be in addition to and not a limitation of duties, obligations, rights and remedies otherwise imposed or available by law.

§ 13.4.2 No action or failure to act by the Owner, Architect or Contractor shall constitute a waiver of a right or duty afforded them under the Contract, nor shall such action or failure to act constitute approval of or acquiescence in a breach there under, except as may be specifically agreed in writing.

## § 13.5 TESTS AND INSPECTIONS

§ 13.5.1 Tests, inspections and approvals of portions of the Work shall be made as required by the Contract Documents and by applicable laws, statutes, ordinances, codes, rules and regulations or lawful orders of public authorities. Unless otherwise provided, the Contractor shall make arrangements for such tests, inspections and approvals with an independent testing laboratory or entity acceptable to the Owner, or with the appropriate public authority, and shall bear all related costs of tests, inspections and approvals. The Contractor shall give the Architect timely notice of when and where tests and inspections are to be made so that the Architect may be present for such procedures. The Owner shall bear costs of (1) tests, inspections or approvals that do not become requirements until after bids are received or negotiations concluded, and (2) tests, inspections or approvals where building codes or applicable laws or regulations prohibit the Owner from delegating their cost to the Contractor.

§ 13.5.2 If the Architect, Owner or public authorities having jurisdiction determine that portions of the Work require additional testing, inspection or approval not included under Section 13.5.1, the Architect will, upon written authorization from the Owner, instruct the Contractor to make arrangements for such additional testing, inspection or approval by an entity acceptable to the Owner, and the Contractor shall give timely notice to the Architect of when and where tests and inspections are to be made so that the Architect may be present for such procedures.

§ 13.5.3 If such procedures for testing, inspection or approval under Sections 13.5.1 and 13.5.2 reveal failure of the portions of the Work to comply with requirements established by the Contract Documents, all costs made necessary by such failure including those of repeated procedures and compensation for the Architect's services and expenses shall be at the Contractor's expense.

§ 13.5.4 . The Contractor shall obtain and deliver promptly to the Architect any Occupancy Permit and any certificates of final inspection of any part of the Contractor's Work and operating permits for any mechanical apparatus, such as elevators, escalators, boilers and air compressors, which may be required by law to permit full use and occupancy of the premises by the Owner. Receipt of such permit or certificates by the Architect shall be a condition precedent to determining that the Work is Substantially Complete.

§ 13.5.5 If the Architect is to observe tests, inspections or approvals required by the Contract Documents, the Architect will do so promptly and, where practicable, at the normal place of testing.

Init.

§ 13.5.6 Tests or inspections conducted pursuant to the Contract Documents shall be made promptly to avoid unreasonable delay in the Work.

### § 13.6 INTEREST

Payments due and unpaid under the Contract Documents shall bear interest from the date payment is due at such rate as the parties may agree upon in writing or, in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.

### § 13.7 TIME LIMITS ON CLAIMS

The Owner and Contractor shall commence all claims and causes of action, whether in contract, tort, breach of warranty or otherwise, against the other arising out of or related to the Contract in accordance with the requirements of the final dispute resolution method selected in the Agreement within the time period specified by applicable law

## ARTICLE 14 TERMINATION OR SUSPENSION OF THE CONTRACT

### § 14.1 TERMINATION BY THE CONTRACTOR

§ 14.1.1 The Contractor may terminate the Contract if the Work is stopped for a period of 30 consecutive days through no act or fault of the Contractor or a Subcontractor, Sub-subcontractor or their agents or employees or any other persons or entities performing portions of the Work under direct or indirect contract with the Contractor, for any of the following reasons:

- .1 Issuance of an order of a court or other public authority having jurisdiction that requires all Work to be stopped;
- .2 An act of government, such as a declaration of national emergency that requires all Work to be stopped;
- .3 Because the Architect has not issued a Certificate for Payment and has not notified the Contractor of the reason for withholding certification as provided in Section 9.4.1, or because the Owner has not made payment on a Certificate for Payment within the time stated in the Contract Documents; or
- .4 The Owner has failed to furnish to the Contractor promptly, upon the Contractor's request, reasonable evidence as required by Section 2.2.1.

### § 14.1.2

### § 14.1.3

### § 14.1.4

§ 14.1.2 The Contractor may terminate the Contract if, through no act or fault of the Contractor or a Subcontractor, Sub-subcontractor or their agents or employees or any other persons or entities performing portions of the Work under direct or indirect contract with the Contractor, repeated suspensions, delays or interruptions of the entire Work by the Owner as described in Section 14.3 constitute in the aggregate more than 100 percent of the total number of days scheduled for completion, or 120 days in any 365-day period, whichever is less.

§ 14.1.3 If one of the reasons described in Section 14.1.1 or 14.1.2 exists, the Contractor may, upon seven days' written notice to the Owner and Architect, terminate the Contract and recover from the Owner payment for Work executed, including reasonable overhead and profit, costs incurred by reason of such termination, and damages.

§ 14.1.4 If the Work is stopped for a period of 60 consecutive days through no act or fault of the Contractor or a Subcontractor or their agents or employees or any other persons performing portions of the Work under contract with the Contractor because the Owner has repeatedly failed to fulfill the Owner's obligations under the Contract

Documents with respect to matters important to the progress of the Work, the Contractor may, upon seven additional days' written notice to the Owner and the Architect, terminate the Contract and recover from the Owner as provided in Section 14.1.3.

#### **§ 14.2 TERMINATION BY THE OWNER FOR CAUSE**

**§ 14.2.1** The Owner may terminate the Contract if the Contractor

- .1 repeatedly refuses or fails to supply enough properly skilled workers or proper materials;
- .2 fails to make payment to Subcontractors for materials or labor in accordance with the respective agreements between the Contractor and the Subcontractors;
- .3 repeatedly disregards applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of a public authority; or
- .4 otherwise is guilty of substantial breach of a provision of the Contract Documents.

**§ 14.2.2** When any of the above reasons exist, the Owner, upon certification by the Initial Decision Maker that sufficient cause exists to justify such action, may without prejudice to any other rights or remedies of the Owner and after giving the Contractor and the Contractor's surety, if any, seven days' written notice, terminate employment of the Contractor and may, subject to any prior rights of the surety:

- .1 Exclude the Contractor from the site and take possession of all materials, equipment, tools, and construction equipment and machinery thereon owned by the Contractor;
- .2 Accept assignment of subcontracts pursuant to Section 5.4; and
- .3 Finish the Work by whatever reasonable method the Owner may deem expedient. Upon written request of the Contractor, the Owner shall furnish to the Contractor a detailed accounting of the costs incurred by the Owner in finishing the Work.

**§ 14.2.3** When the Owner terminates the Contract for one of the reasons stated in Section 14.2.1, the Contractor shall not be entitled to receive further payment until the Work is finished.

3

**§ 14.2.4** If the unpaid balance of the Contract Sum exceeds costs of finishing the Work, including compensation for the Architect's services and expenses made necessary thereby, and other damages incurred by the Owner and not expressly waived, such excess shall be paid to the Contractor. If such costs and damages exceed the unpaid balance, the Contractor shall pay the difference to the Owner. The amount to be paid to the Contractor or Owner, as the case may be, shall be certified by the Initial Decision Maker, upon application, and this obligation for payment shall survive termination of the Contract.

#### **§ 14.3 SUSPENSION BY THE OWNER FOR CONVENIENCE**

**§ 14.3.1** The Owner may, without cause, order the Contractor in writing to suspend, delay or interrupt the Work in whole or in part for such period of time as the Owner may determine

**§ 14.3.2** The Contract Sum and Contract Time shall be adjusted for increases in the cost and time caused by suspension, delay or interruption as described in Section 14.3.1. Adjustment of the Contract Sum shall include profit. No adjustment shall be made to the extent

- .1 that performance is, was or would have been so suspended, delayed or interrupted by another cause for which the Contractor is responsible; or
- .2 that an equitable adjustment is made or denied under another provision of the Contract.

#### **§ 14.4 TERMINATION BY THE OWNER FOR CONVENIENCE**

**§ 14.4.1** The Owner may, at any time, terminate the Contract for the Owner's convenience and without cause.

**§ 14.4.2** Upon receipt of written notice from the Owner of such termination for the Owner's convenience, the Contractor shall

Init.

- .1 cease operations as directed by the Owner in the notice;
- .2 take actions necessary, or that the Owner may direct, for the protection and preservation of the Work; and
- .3 except for Work directed to be performed prior to the effective date of termination stated in the notice, terminate all existing subcontracts and purchase orders and enter into no further subcontracts and purchase orders.

**§ 14.4.3** In case of such termination for the Owner's convenience, the Contractor shall be entitled to receive payment for Work executed, and **approved by the Architect.**

## **ARTICLE 15 CLAIMS AND DISPUTES**

### **§ 15.1 CLAIMS**

#### **§ 15.1.1 DEFINITION**

A Claim is a demand or assertion by one of the parties seeking, as a matter of right, payment of money, or other relief with respect to the terms of the Contract. The term "Claim" also includes other disputes and matters in question between the Owner and Contractor arising out of or relating to the Contract. The responsibility to substantiate Claims shall rest with the party making the Claim.

#### **§ 15.1.2 NOTICE OF CLAIMS**

Claims by either the Owner or Contractor must be initiated by written notice to the other party and to the Initial Decision Maker with a copy sent to the Architect, if the Architect is not serving as the Initial Decision Maker. Claims by either party must be initiated within 21 days after occurrence of the event giving rise to such Claim or within 21 days after the claimant first recognizes the condition giving rise to the Claim, whichever is later.

**§ 15.1.2.1** The Contractor's failure to provide written notice in strict accordance with this Paragraph will result in the Contractor having waived its claim. Written notice submitted by the Contractor must include pricing of the Claim in accordance with Article 7.

**§ 15.1.2.2** The Contractor shall furnish the Initial Decision Maker with such additional documentation as the Initial Decision Maker may request to evaluate the Claim.

#### **§ 15.1.3 CONTINUING CONTRACT PERFORMANCE**

Regardless of the status of a Claim, except as otherwise agreed in writing or as provided in Article 9 and Article 14, the Contractor shall proceed diligently with performance of the Contract. The Architect will prepare Change Orders and issue Certificates for Payment in accordance with the decisions of the Initial Decision Maker.

#### **§ 15.1.4 CLAIMS FOR ADDITIONAL COST**

Contractor hereby acknowledges that the Owner has the contractual right to delay the Work. Such right may not be exercised unreasonably. In addition, Contractor shall not be entitled to additional compensation as a result of a delay, even if caused by the Owner or those for whom the Owner is responsible. The Contractor's sole remedy for any delay is an extension of time, notwithstanding the above. If the Contractor wishes to make a Claim for an increase in the Contract Sum for reasons other than delay or hindrance, written notice as provided herein in Subsection 15.1.2 shall be given before proceeding to execute the Work. Prior notice is not required for Claims relating to an emergency endangering life or property arising under Section 10.4.

#### **§ 15.1.5 CLAIMS FOR ADDITIONAL TIME**

**§ 15.1.5.1** If the Contractor wishes to make a Claim for an increase in the Contract Time, written notice as provided herein Subsection 15.1.2 shall be given.

**§ 15.1.5.2** Adverse weather conditions shall not be allowed as a basis for a Claim for additional time.

**§ 15.1.5.3** No increase in Contract Time shall be allowed for Work which is delayed as a result of Contractor's failure to timely submit, revise or resubmit shop drawings, product data and/or samples.

Init.

### § 15.1.6 CLAIMS FOR CONSEQUENTIAL DAMAGES

The Contractor shall waive Claims against the Owner for consequential damages arising out of or relating to this Contract. This waiver includes

- .1
- .2 damages incurred by the Contractor for principal office expenses including the compensation of personnel stationed there, for losses of financing, business and reputation, and for loss of profit except anticipated profit arising directly from the Work.

This waiver is applicable, without limitation, to all consequential damages due to the Contractor's termination in accordance with Article 14. Nothing contained in this Section 15.1.6 shall be deemed to preclude an award of liquidated damages, when applicable, in accordance with the requirements of the Contract Documents.

### § 15.2 INITIAL DECISION

§ 15.2.1 Claims, excluding those arising under Sections 11.3.9, and 11.3.10, shall be referred to the Initial Decision Maker for initial decision. The Architect will serve as the Initial Decision Maker, unless otherwise indicated in the Agreement. Except for those Claims excluded by this Section 15.2.1, an initial decision shall be required as a condition precedent to mediation of any Claim arising prior to the date final payment is due, unless 30 days have passed after the Claim has been referred to the Initial Decision Maker with no decision having been rendered.

§ 15.2.2 The Initial Decision Maker will review Claims and within twenty one days of the receipt of a Claim take one or more of the following actions: (1) request additional supporting data from the claimant or a response with supporting data from the other party, (2) reject the Claim in whole or in part, (3) approve the Claim, (4) suggest a compromise, or (5) advise the parties that the Initial Decision Maker is unable to resolve the Claim if the Initial Decision Maker lacks sufficient information to evaluate the merits of the Claim or if the Initial Decision Maker concludes that, in the Initial Decision Maker's sole discretion, it would be inappropriate for the Initial Decision Maker to resolve the Claim.

§ 15.2.3 In evaluating Claims, the Initial Decision Maker may, but shall not be obligated to, consult with or seek information from either party or from persons with special knowledge or expertise who may assist the Initial Decision Maker in rendering a decision. The Initial Decision Maker may require the Claimant to authorize retention of such persons at the Claimant's expense.

§ 15.2.4 If the Initial Decision Maker requests a party to provide a response to a Claim or to furnish additional supporting data, such party shall respond, within ten days after receipt of such request, and shall either (1) provide a response on the requested supporting data, (2) advise the Initial Decision Maker when the response or supporting data will be furnished or (3) advise the Initial Decision Maker that no supporting data will be furnished. Upon receipt of the response or supporting data, if any, the Initial Decision Maker will either reject or approve the Claim in whole or in part.

§ 15.2.5 The Initial Decision Maker will render an initial decision approving or rejecting the Claim, or indicating that the Initial Decision Maker is unable to resolve the Claim. This initial decision shall (1) be in writing; (2) state the reasons therefor; and (3) notify the parties and the Architect, if the Architect is not serving as the Initial Decision Maker, of any change in the Contract Sum or Contract Time or both. The initial decision shall be final and binding on the parties but subject to Sections 15.3 and 15.6.

§ 15.2.6 Subject to the discretion of the Owner, the Contractor may request that it be allowed to file for mediation of an initial decision, subject to the terms of Section 15.2.6.1.

§ 15.2.6.1 The Contractor may, within 30 days from the date of an initial decision, request in writing that the Owner file for mediation within 60 days of the initial decision. If such a request is made and the Owner receiving the request fails to file for mediation within the time required, then both parties waive their rights to mediate with respect to the initial decision.

§ 15.2.7 In the event of a Claim against the Contractor, the Owner may, but is not obligated to, notify the surety, if any, of the nature and amount of the Claim. If the Claim relates to a possibility of a Contractor's default, the Owner may, but is not obligated to, notify the surety and request the surety's assistance in resolving the controversy.

Init.



| § 15.2.8

| § 15.3 MEDIATION

| § 15.3.1

| § 15.3.2 The parties **intend to** endeavor to resolve their Claims and all other matters in question between them by mediation and negotiation, if requested by the Owner .

| § 15.3.3 The parties shall share the mediator's fee and any filing fees equally. The mediation shall be held in the place where the Project is located, unless another location is mutually agreed upon. Agreements reached in mediation shall be enforceable as settlement agreements in any court having jurisdiction thereof.

| § 15.4 ARBITRATION

| § 15.4.1

| § 15.4.1.1

| § 15.4.2

| § 15.4.3

| § 15.4.4 CONSOLIDATION OR JOINDER

| § 15.4.4.1

| § 15.4.4.2

| § 15.4.4.3 .

Init.

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**



**AIA**<sup>®</sup>

# Document A312™ – 2010

## Payment Bond

**CONTRACTOR:**

*(Name, legal status and address)*

**SURETY:**

*(Name, legal status and principal place of business)*

**OWNER:**

*(Name, legal status and address)*

Borough of Naugatuck  
229 Church Street  
Naugatuck, CT 06770

**CONSTRUCTION CONTRACT**

Date:

Amount: \$

Description:

*(Name and location)*

Naugatuck High School – Parking Lot Expansion & Related Site Improvements  
543 Rubber Avenue  
Naugatuck, CT 06770

**BOND**

Date:

*(Not earlier than Construction Contract Date)*

Amount: \$

Modifications to this Bond:  None  See Section 18

**CONTRACTOR AS PRINCIPAL**

Company: *(Corporate Seal)*

**SURETY**

Company: *(Corporate Seal)*

Signature: \_\_\_\_\_

Name and

Title:

Signature: \_\_\_\_\_

Name and

Title:

*(Any additional signatures appear on the last page of this Payment Bond.)*

*(FOR INFORMATION ONLY — Name, address and telephone)*

**AGENT or BROKER:**

**OWNER'S REPRESENTATIVE:**

*(Architect, Engineer or other party:)*

Robert Butler., Business Manager &  
Controller c/o Wendy Hozer,  
Purchasing Agent – Purchasing Office  
Naugatuck Town Hall  
229 Church Street  
Naugatuck, CT 06770  
Telephone Number: 203-720-7025  
Fax Number: 203-720-7031

**ADDITIONS AND DELETIONS:**

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

Any singular reference to Contractor, Surety, Owner or other party shall be considered plural where applicable.

Init.

AIA Document A312™ – 2010 Payment Bond. The American Institute of Architects. All rights reserved. WARNING: This AIA® Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA® Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law. This document was produced by AIA software at 16:17:18 on 01/26/2017 under Order No.5992967110\_1 which expires on 04/03/2017, and is not for resale.

User Notes:

(793802099)

§ 1 The Contractor and Surety, jointly and severally, bind themselves, their heirs, executors, administrators, successors and assigns to the Owner to pay for labor, materials and equipment furnished for use in the performance of the Construction Contract, which is incorporated herein by reference, subject to the following terms.

§ 2 If the Contractor promptly makes payment of all sums due to Claimants, and defends, indemnifies and holds harmless the Owner from claims, demands, liens or suits by any person or entity seeking payment for labor, materials or equipment furnished for use in the performance of the Construction Contract, then the Surety and the Contractor shall have no obligation under this Bond.

§ 3 If there is no Owner Default under the Construction Contract, the Surety's obligation to the Owner under this Bond shall arise after the Owner has promptly notified the Contractor and the Surety (at the address described in Section 13) of claims, demands, liens or suits against the Owner or the Owner's property by any person or entity seeking payment for labor, materials or equipment furnished for use in the performance of the Construction Contract and tendered defense of such claims, demands, liens or suits to the Contractor and the Surety.

§ 4 When the Owner has satisfied the conditions in Section 3, the Surety shall promptly and at the Surety's expense defend, indemnify and hold harmless the Owner against a duly tendered claim, demand, lien or suit.

§ 5 The Surety's obligations to a Claimant under this Bond shall arise after the following:

§ 5.1 Claimants, who do not have a direct contract with the Contractor,

- .1 have furnished a written notice of non-payment to the Contractor, stating with substantial accuracy the amount claimed and the name of the party to whom the materials were, or equipment was, furnished or supplied or for whom the labor was done or performed, within ninety (90) days after having last performed labor or last furnished materials or equipment included in the Claim; and
- .2 have sent a Claim to the Surety (at the address described in Section 13).

§ 5.2 Claimants, who are employed by or have a direct contract with the Contractor, have sent a Claim to the Surety (at the address described in Section 13).

§ 6 If a notice of non-payment required by Section 5.1.1 is given by the Owner to the Contractor, that is sufficient to satisfy a Claimant's obligation to furnish a written notice of non-payment under Section 5.1.1.

§ 7 When a Claimant has satisfied the conditions of Sections 5.1 or 5.2, whichever is applicable, the Surety shall promptly and at the Surety's expense take the following actions:

§ 7.1 Send an answer to the Claimant, with a copy to the Owner, within sixty (60) days after receipt of the Claim, stating the amounts that are undisputed and the basis for challenging any amounts that are disputed; and

§ 7.2 Pay or arrange for payment of any undisputed amounts.

§ 7.3 The Surety's failure to discharge its obligations under Section 7.1 or Section 7.2 shall not be deemed to constitute a waiver of defenses the Surety or Contractor may have or acquire as to a Claim, except as to undisputed amounts for which the Surety and Claimant have reached agreement. If, however, the Surety fails to discharge its obligations under Section 7.1 or Section 7.2, the Surety shall indemnify the Claimant for the reasonable attorney's fees the Claimant incurs thereafter to recover any sums found to be due and owing to the Claimant.

§ 8 The Surety's total obligation shall not exceed the amount of this Bond, plus the amount of reasonable attorney's fees provided under Section 7.3, and the amount of this Bond shall be credited for any payments made in good faith by the Surety.

§ 9 Amounts owed by the Owner to the Contractor under the Construction Contract shall be used for the performance of the Construction Contract and to satisfy claims, if any, under any construction performance bond. By the Contractor furnishing and the Owner accepting this Bond, they agree that all funds earned by the Contractor in the performance of the Construction Contract are dedicated to satisfy obligations of the Contractor and Surety under this Bond, subject to the Owner's priority to use the funds for the completion of the work.

§ 10 The Surety shall not be liable to the Owner, Claimants or others for obligations of the Contractor that are unrelated to the Construction Contract. The Owner shall not be liable for the payment of any costs or expenses of any Claimant under this Bond, and shall have under this Bond no obligation to make payments to, or give notice on behalf of, Claimants or otherwise have any obligations to Claimants under this Bond.

§ 11 The Surety hereby waives notice of any change, including changes of time, to the Construction Contract or to related subcontracts, purchase orders and other obligations.

§ 12 No suit or action shall be commenced by a Claimant under this Bond other than in a court of competent jurisdiction in the state in which the project that is the subject of the Construction Contract is located or after the expiration of one year from the date (1) on which the Claimant sent a Claim to the Surety pursuant to Section 5.1.2 or 5.2, or (2) on which the last labor or service was performed by anyone or the last materials or equipment were furnished by anyone under the Construction Contract, whichever of (1) or (2) first occurs. If the provisions of this Paragraph are void or prohibited by law, the minimum period of limitation available to sureties as a defense in the jurisdiction of the suit shall be applicable.

§ 13 Notice and Claims to the Surety, the Owner or the Contractor shall be mailed or delivered to the address shown on the page on which their signature appears. Actual receipt of notice or Claims, however accomplished, shall be sufficient compliance as of the date received.

§ 14 When this Bond has been furnished to comply with a statutory or other legal requirement in the location where the construction was to be performed, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. When so furnished, the intent is that this Bond shall be construed as a statutory bond and not as a common law bond.

§ 15 Upon request by any person or entity appearing to be a potential beneficiary of this Bond, the Contractor and Owner shall promptly furnish a copy of this Bond or shall permit a copy to be made.

#### § 16 Definitions

§ 16.1 Claim. A written statement by the Claimant including at a minimum:

- .1 the name of the Claimant;
- .2 the name of the person for whom the labor was done, or materials or equipment furnished;
- .3 a copy of the agreement or purchase order pursuant to which labor, materials or equipment was furnished for use in the performance of the Construction Contract;
- .4 a brief description of the labor, materials or equipment furnished;
- .5 the date on which the Claimant last performed labor or last furnished materials or equipment for use in the performance of the Construction Contract;
- .6 the total amount earned by the Claimant for labor, materials or equipment furnished as of the date of the Claim;
- .7 the total amount of previous payments received by the Claimant; and
- .8 the total amount due and unpaid to the Claimant for labor, materials or equipment furnished as of the date of the Claim.

§ 16.2 Claimant. An individual or entity having a direct contract with the Contractor or with a subcontractor of the Contractor to furnish labor, materials or equipment for use in the performance of the Construction Contract. The term Claimant also includes any individual or entity that has rightfully asserted a claim under an applicable mechanic's lien or similar statute against the real property upon which the Project is located. The intent of this Bond shall be to include without limitation in the terms "labor, materials or equipment" that part of water, gas, power, light, heat, oil, gasoline, telephone service or rental equipment used in the Construction Contract, architectural and engineering services required for performance of the work of the Contractor and the Contractor's subcontractors, and all other items for which a mechanic's lien may be asserted in the jurisdiction where the labor, materials or equipment were furnished.

§ 16.3 Construction Contract. The agreement between the Owner and Contractor identified on the cover page, including all Contract Documents and all changes made to the agreement and the Contract Documents.

§ 16.4 **Owner Default.** Failure of the Owner, which has not been remedied or waived, to pay the Contractor as required under the Construction Contract or to perform and complete or comply with the other material terms of the Construction Contract.

§ 16.5 **Contract Documents.** All the documents that comprise the agreement between the Owner and Contractor.

§ 17 If this Bond is issued for an agreement between a Contractor and subcontractor, the term Contractor in this Bond shall be deemed to be Subcontractor and the term Owner shall be deemed to be Contractor.

§ 18 Modifications to this bond are as follows:

*(Space is provided below for additional signatures of added parties, other than those appearing on the cover page.)*

**CONTRACTOR AS PRINCIPAL**

**SURETY**

Company: \_\_\_\_\_ (Corporate Seal)

Company: \_\_\_\_\_ (Corporate Seal)

Signature: \_\_\_\_\_

Signature: \_\_\_\_\_

Name and Title: \_\_\_\_\_

Name and Title: \_\_\_\_\_

Address: \_\_\_\_\_

Address: \_\_\_\_\_



# Document A312™ – 2010

## Performance Bond

**CONTRACTOR:**

*(Name, legal status and address)*

**SURETY:**

*(Name, legal status and principal place of business)*

**OWNER:**

*(Name, legal status and address)*

Borough of Naugatuck  
229 Church Street  
Naugatuck, CT 06770

**CONSTRUCTION CONTRACT**

Date:

Amount: \$

Description:

*(Name and location)*

Naugatuck High School – Parking Lot Expansion & Related Site Improvements  
543 Rubber Avenue  
Naugatuck, CT 06770

**BOND**

Date:

*(Not earlier than Construction Contract Date)*

Amount: \$

Modifications to this Bond:  None  See Section 16

**CONTRACTOR AS PRINCIPAL**

Company: *(Corporate Seal)*

**SURETY**

Company: *(Corporate Seal)*

Signature: \_\_\_\_\_

Name and

Title:

Signature: \_\_\_\_\_

Name and

Title:

*(Any additional signatures appear on the last page of this Performance Bond.)*

*(FOR INFORMATION ONLY — Name, address and telephone)*

**AGENT or BROKER:****OWNER'S REPRESENTATIVE:**

*(Architect, Engineer or other party:)*

Robert Butler, Business Manager &  
Controller c/o Wendy Hozer  
Purchasing Agent- Purchasing Office  
Naugatuck Town Hall  
229 Church Street  
Naugatuck, CT 06770  
Telephone Number: 203-720-7025  
Fax Number: 203-720-7031

**ADDITIONS AND DELETIONS:**

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

Any singular reference to Contractor, Surety, Owner or other party shall be considered plural where applicable.

Init.

AIA Document A312™ – 2010 Performance Bond. The American Institute of Architects. All rights reserved. WARNING: This AIA® Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA® Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law. This document was produced by AIA software at 16:18:05 on 01/26/2017 under Order No.5992967110\_1 which expires on 04/03/2017, and is not for resale.

User Notes:

(1699766839)

§ 1 The Contractor and Surety, jointly and severally, bind themselves, their heirs, executors, administrators, successors and assigns to the Owner for the performance of the Construction Contract, which is incorporated herein by reference.

§ 2 If the Contractor performs the Construction Contract, the Surety and the Contractor shall have no obligation under this Bond, except when applicable to participate in a conference as provided in Section 3.

§ 3 If there is no Owner Default under the Construction Contract, the Surety's obligation under this Bond shall arise after

- .1 the Owner first provides notice to the Contractor and the Surety that the Owner is considering declaring a Contractor Default. Such notice shall indicate whether the Owner is requesting a conference among the Owner, Contractor and Surety to discuss the Contractor's performance. If the Owner does not request a conference, the Surety may, within five (5) business days after receipt of the Owner's notice, request such a conference. If the Surety timely requests a conference, the Owner shall attend. Unless the Owner agrees otherwise, any conference requested under this Section 3.1 shall be held within ten (10) business days of the Surety's receipt of the Owner's notice. If the Owner, the Contractor and the Surety agree, the Contractor shall be allowed a reasonable time to perform the Construction Contract, but such an agreement shall not waive the Owner's right, if any, subsequently to declare a Contractor Default;
- .2 the Owner declares a Contractor Default, terminates the Construction Contract and notifies the Surety; and
- .3 the Owner has agreed to pay the Balance of the Contract Price in accordance with the terms of the Construction Contract to the Surety or to a contractor selected to perform the Construction Contract.

§ 4 Failure on the part of the Owner to comply with the notice requirement in Section 3.1 shall not constitute a failure to comply with a condition precedent to the Surety's obligations, or release the Surety from its obligations, except to the extent the Surety demonstrates actual prejudice.

§ 5 When the Owner has satisfied the conditions of Section 3, the Surety shall promptly and at the Surety's expense take one of the following actions:

§ 5.1 Arrange for the Contractor, with the consent of the Owner, to perform and complete the Construction Contract;

§ 5.2 Undertake to perform and complete the Construction Contract itself, through its agents or independent contractors;

§ 5.3 Obtain bids or negotiated proposals from qualified contractors acceptable to the Owner for a contract for performance and completion of the Construction Contract, arrange for a contract to be prepared for execution by the Owner and a contractor selected with the Owner's concurrence, to be secured with performance and payment bonds executed by a qualified surety equivalent to the bonds issued on the Construction Contract, and pay to the Owner the amount of damages as described in Section 7 in excess of the Balance of the Contract Price incurred by the Owner as a result of the Contractor Default; or

§ 5.4 Waive its right to perform and complete, arrange for completion, or obtain a new contractor and with reasonable promptness under the circumstances:

- .1 After investigation, determine the amount for which it may be liable to the Owner and, as soon as practicable after the amount is determined, make payment to the Owner; or
- .2 Deny liability in whole or in part and notify the Owner, citing the reasons for denial.

§ 6 If the Surety does not proceed as provided in Section 5 with reasonable promptness, the Surety shall be deemed to be in default on this Bond seven days after receipt of an additional written notice from the Owner to the Surety demanding that the Surety perform its obligations under this Bond, and the Owner shall be entitled to enforce any remedy available to the Owner. If the Surety proceeds as provided in Section 5.4, and the Owner refuses the payment or the Surety has denied liability, in whole or in part, without further notice the Owner shall be entitled to enforce any remedy available to the Owner.



§ 7 If the Surety elects to act under Section 5.1, 5.2 or 5.3, then the responsibilities of the Surety to the Owner shall not be greater than those of the Contractor under the Construction Contract, and the responsibilities of the Owner to the Surety shall not be greater than those of the Owner under the Construction Contract. Subject to the commitment by the Owner to pay the Balance of the Contract Price, the Surety is obligated, without duplication, for

- .1 the responsibilities of the Contractor for correction of defective work and completion of the Construction Contract;
- .2 additional legal, design professional and delay costs resulting from the Contractor's Default, and resulting from the actions or failure to act of the Surety under Section 5; and
- .3 liquidated damages, or if no liquidated damages are specified in the Construction Contract, actual damages caused by delayed performance or non-performance of the Contractor.

§ 8 If the Surety elects to act under Section 5.1, 5.3 or 5.4, the Surety's liability is limited to the amount of this Bond.

§ 9 The Surety shall not be liable to the Owner or others for obligations of the Contractor that are unrelated to the Construction Contract, and the Balance of the Contract Price shall not be reduced or set off on account of any such unrelated obligations. No right of action shall accrue on this Bond to any person or entity other than the Owner or its heirs, executors, administrators, successors and assigns.

§ 10 The Surety hereby waives notice of any change, including changes of time, to the Construction Contract or to related subcontracts, purchase orders and other obligations.

§ 11 Any proceeding, legal or equitable, under this Bond may be instituted in any court of competent jurisdiction in the location in which the work or part of the work is located and shall be instituted within two years after a declaration of Contractor Default or within two years after the Contractor ceased working or within two years after the Surety refuses or fails to perform its obligations under this Bond, whichever occurs first. If the provisions of this Paragraph are void or prohibited by law, the minimum period of limitation available to sureties as a defense in the jurisdiction of the suit shall be applicable.

§ 12 Notice to the Surety, the Owner or the Contractor shall be mailed or delivered to the address shown on the page on which their signature appears.

§ 13 When this Bond has been furnished to comply with a statutory or other legal requirement in the location where the construction was to be performed, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. When so furnished, the intent is that this Bond shall be construed as a statutory bond and not as a common law bond.

#### § 14 Definitions

§ 14.1 **Balance of the Contract Price.** The total amount payable by the Owner to the Contractor under the Construction Contract after all proper adjustments have been made, including allowance to the Contractor of any amounts received or to be received by the Owner in settlement of insurance or other claims for damages to which the Contractor is entitled, reduced by all valid and proper payments made to or on behalf of the Contractor under the Construction Contract.

§ 14.2 **Construction Contract.** The agreement between the Owner and Contractor identified on the cover page, including all Contract Documents and changes made to the agreement and the Contract Documents.

§ 14.3 **Contractor Default.** Failure of the Contractor, which has not been remedied or waived, to perform or otherwise to comply with a material term of the Construction Contract.

§ 14.4 **Owner Default.** Failure of the Owner, which has not been remedied or waived, to pay the Contractor as required under the Construction Contract or to perform and complete or comply with the other material terms of the Construction Contract.

§ 14.5 **Contract Documents.** All the documents that comprise the agreement between the Owner and Contractor.

Init.

§ 15 If this Bond is issued for an agreement between a Contractor and subcontractor, the term Contractor in this Bond shall be deemed to be Subcontractor and the term Owner shall be deemed to be Contractor.

§ 16 Modifications to this bond are as follows:

*(Space is provided below for additional signatures of added parties, other than those appearing on the cover page.)*

**CONTRACTOR AS PRINCIPAL**

Company: \_\_\_\_\_ *(Corporate Seal)*

Signature: \_\_\_\_\_  
Name and Title: \_\_\_\_\_  
Address: \_\_\_\_\_

**SURETY**

Company: \_\_\_\_\_ *(Corporate Seal)*

Signature: \_\_\_\_\_  
Name and Title: \_\_\_\_\_  
Address: \_\_\_\_\_

Init.

Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

---

**Minimum Rates and Classifications  
for Heavy/Highway Construction**

**Connecticut Department of Labor  
Wage and Workplace Standards Division**

ID#: H 23180

---

By virtue of the authority vested in the Labor Commissioner under provisions of Section 31-53 of the General Statutes of Connecticut, as amended, the following are declared to be the prevailing rates and welfare payments and will apply only where the contract is advertised for bid within 20 days of the date on which the rates are established. Any contractor or subcontractor not obligated by agreement to pay to the welfare and pension fund shall pay this amount to each employee as part of his/her hourly wages.

Project Number: 16058.00

Project Town: Naugatuck

FAP Number:

State Number:

Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

---

**CLASSIFICATION**

**Hourly Rate**

**Benefits**

01) Asbestos/Toxic Waste Removal Laborers: Asbestos removal and encapsulation (except its removal from mechanical systems which are not to be scrapped), toxic waste removers, blasters. \*\*See Laborers Group 5 and 7\*\*

---

|                |       |            |
|----------------|-------|------------|
| 1) Boilermaker | 33.79 | 34% + 8.96 |
|----------------|-------|------------|

---

|   |       |       |
|---|-------|-------|
| 1a) Bricklayer, Cement Masons, Cement Finishers, Plasterers, Stone Masons | 33.48 | 30.21 |
|---|-------|-------|

---

|                              |       |       |
|------------------------------|-------|-------|
| 2) Carpenters, Piledrivermen | 32.00 | 24.42 |
|------------------------------|-------|-------|

---

As of: Tuesday, February 21, 2017

Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

|                   |       |       |
|-------------------|-------|-------|
| 2a) Diver Tenders | 32.00 | 24.42 |
|-------------------|-------|-------|

---

|           |       |       |
|-----------|-------|-------|
| 3) Divers | 40.46 | 24.42 |
|-----------|-------|-------|

---

|                  |       |       |
|------------------|-------|-------|
| 03a) Millwrights | 32.47 | 24.84 |
|------------------|-------|-------|

---

|  |       |       |
|--|-------|-------|
| 4) Painters: (Bridge Construction) Brush, Roller, Blasting (Sand, Water, etc.),<br>Spray | 46.95 | 20.15 |
|--|-------|-------|

---

|                                |       |       |
|--------------------------------|-------|-------|
| 4a) Painters: Brush and Roller | 32.02 | 20.15 |
|--------------------------------|-------|-------|

---

|                          |       |       |
|--------------------------|-------|-------|
| 4b) Painters: Spray Only | 35.02 | 20.15 |
|--------------------------|-------|-------|

---

|                          |       |       |
|--------------------------|-------|-------|
| 4c) Painters: Steel Only | 34.02 | 20.15 |
|--------------------------|-------|-------|

---

Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

4d) Painters: Blast and Spray 35.02 20.15

---

4e) Painters: Tanks, Tower and Swing 34.02 20.15

---

5) Electrician (Trade License required: E-1,2 L-5,6 C-5,6 T-1,2 L-1,2 V-1,2,7,8,9) 38.02 23.75+3% of gross wage

---

6) Ironworkers: Ornamental, Reinforcing, Structural, and Precast Concrete Erection 35.22 31.99 + a

---

7) Plumbers (Trade License required: (P-1,2,6,7,8,9 J-1,2,3,4 SP-1,2) and Pipefitters (Including HVAC Work) (Trade License required: S-1,2,3,4,5,6,7,8 B-1,2,3,4 D-1,2,3,4 G-1, G-2, G-8, G-9) 40.62 29.71

---

---LABORERS----

---

8) Group 1: Laborer (Unskilled), Common or General, acetylene burner, concrete specialist 28.55 18.90

---

Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

|   |       |       |
|---|-------|-------|
| 9) Group 2: Chain saw operators, fence and guard rail erectors, pneumatic tool operators, powdermen | 28.80 | 18.90 |
|---|-------|-------|

---

|                         |       |       |
|-------------------------|-------|-------|
| 10) Group 3: Pipelayers | 29.05 | 18.90 |
|-------------------------|-------|-------|

---

|  |       |       |
|--|-------|-------|
| 11) Group 4: Jackhammer/Pavement breaker (handheld); mason tenders (cement/concrete), catch basin builders, asphalt rakers, air track operators, block paver, curb setter and forklift operators | 29.05 | 18.90 |
|--|-------|-------|

---

|   |       |       |
|---|-------|-------|
| 12) Group 5: Toxic waste removal (non-mechanical systems) | 30.55 | 18.90 |
|---|-------|-------|

---

|                       |       |       |
|-----------------------|-------|-------|
| 13) Group 6: Blasters | 30.30 | 18.90 |
|-----------------------|-------|-------|

---

|   |       |       |
|---|-------|-------|
| Group 7: Asbestos/lead removal, non-mechanical systems (does not include leaded joint pipe) | 29.55 | 18.90 |
|---|-------|-------|

---

|                                    |       |       |
|------------------------------------|-------|-------|
| Group 8: Traffic control signalmen | 16.00 | 18.90 |
|------------------------------------|-------|-------|

---

Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

|                           |       |       |
|---------------------------|-------|-------|
| Group 9: Hydraulic Drills | 29.30 | 18.90 |
|---------------------------|-------|-------|

---

---LABORERS (TUNNEL CONSTRUCTION, FREE AIR). Shield Drive and  
Liner Plate Tunnels in Free Air.----

---

|   |       |           |
|---|-------|-----------|
| 13a) Miners, Motormen, Mucking Machine Operators, Nozzle Men, Grout Men,<br>Shaft & Tunnel Steel & Rodmen, Shield & Erector, Arm Operator, Cable<br>Tenders | 32.22 | 18.90 + a |
|---|-------|-----------|

---

|                         |       |           |
|-------------------------|-------|-----------|
| 13b) Brakemen, Trackmen | 31.28 | 18.90 + a |
|-------------------------|-------|-----------|

---

---CLEANING, CONCRETE AND CAULKING TUNNEL----

---

|  |       |           |
|--|-------|-----------|
| 14) Concrete Workers, Form Movers, and Strippers | 31.28 | 18.90 + a |
|--|-------|-----------|

---

|                   |       |           |
|-------------------|-------|-----------|
| 15) Form Erectors | 31.60 | 18.90 + a |
|-------------------|-------|-----------|

---

Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

---ROCK SHAFT LINING, CONCRETE, LINING OF SAME AND TUNNEL  
IN FREE AIR:----

---

|   |       |           |
|---|-------|-----------|
| 16) Brakemen, Trackmen, Tunnel Laborers, Shaft Laborers | 31.28 | 18.90 + a |
|---|-------|-----------|

---

|   |       |           |
|---|-------|-----------|
| 17) Laborers Topside, Cage Tenders, Bellman | 31.17 | 18.90 + a |
|---|-------|-----------|

---

|            |       |           |
|------------|-------|-----------|
| 18) Miners | 32.22 | 18.90 + a |
|------------|-------|-----------|

---

---TUNNELS, CAISSON AND CYLINDER WORK IN COMPRESSED  
AIR: ----

---

|              |       |           |
|--------------|-------|-----------|
| 18a) Blaster | 38.53 | 18.90 + a |
|--------------|-------|-----------|

---

|   |       |           |
|---|-------|-----------|
| 19) Brakemen, Trackmen, Groutman, Laborers, Outside Lock Tender, Gauge<br>Tenders | 38.34 | 18.90 + a |
|---|-------|-----------|

---



Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

20) Change House Attendants, Powder Watchmen, Top on Iron Bolts 36.41 18.90 + a

---

21) Mucking Machine Operator 39.11 18.90 + a

---

---TRUCK DRIVERS---(\*see note below)

---

Two axle trucks 28.83 21.39 + a

---

Three axle trucks; two axle ready mix 28.93 21.39 + a

---

Three axle ready mix 28.98 21.39 + a

---

Four axle trucks, heavy duty trailer (up to 40 tons) 29.03 21.39 + a

---

Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

|   |       |           |
|---|-------|-----------|
| Four axle ready-mix   | 29.08 | 21.39 + a |
| <hr/>   |       |           |
| Heavy duty trailer (40 tons and over)   | 29.28 | 21.39 + a |
| <hr/>   |       |           |
| Specialized earth moving equipment other than conventional type on-the road trucks and semi-trailer (including Euclids)   | 29.08 | 21.39 + a |
| <hr/>   |       |           |
| ---POWER EQUIPMENT OPERATORS---   |       |           |
| <hr/>   |       |           |
| Group 1: Crane handling or erecting structural steel or stone, hoisting engineer (2 drums or over), front end loader (7 cubic yards or over), Work Boat 26 ft. & Over, Tunnel Boring Machines. (Trade License Required)   | 38.55 | 23.55 + a |
| <hr/>   |       |           |
| Group 2: Cranes (100 ton rate capacity and over); Excavator over 2 cubic yards; Piledriver (\$3.00 premium when operator controls hammer); Bauer Drill/Caisson. (Trade License Required)  | 38.23 | 23.55 + a |
| <hr/>   |       |           |
| Group 3: Excavator/Backhoe under 2 cubic yards; Cranes (under 100 ton rated capacity), Gradall; Master Mechanic; Hoisting Engineer (all types of equipment where a drum and cable are used to hoist or drag material regardless of motive power of operation), Rubber Tire Excavator (Drott-1085 or similar); Grader Operator; Bulldozer Fine Grade (slopes, shaping, laser or GPS, etc.). (Trade License Required) | 37.49 | 23.55 + a |
| <hr/>   |       |           |

Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

Group 4: Trenching Machines; Lighter Derrick; Concrete Finishing Machine; CMI Machine or Similar; Koehring Loader (Skooper) 37.10 23.55 + a

---

Group 5: Specialty Railroad Equipment; Asphalt Paver; Asphalt Spreader; Asphalt Reclaiming Machine; Line Grinder; Concrete Pumps; Drills with Self Contained Power Units; Boring Machine; Post Hole Digger; Auger; Pounder; Well Digger; Milling Machine (over 24" Mandrell) 36.51 23.55 + a

---

Group 5 continued: Side Boom; Combination Hoe and Loader; Directional Driller. 36.51 23.55 + a

---

Group 6: Front End Loader (3 up to 7 cubic yards); Bulldozer (rough grade dozer). 36.20 23.55 + a

---

Group 7: Asphalt Roller; Concrete Saws and Cutters (ride on types); Vermeer Concrete Cutter; Stump Grinder; Scraper; Snooper; Skidder; Milling Machine (24" and Under Mandrel). 35.86 23.55 + a

---

Group 8: Mechanic, Grease Truck Operator, Hydroblaster, Barrier Mover, Power Stone Spreader; Welder; Work Boat under 26 ft.; Transfer Machine. 35.46 23.55 + a

---

Group 9: Front End Loader (under 3 cubic yards), Skid Steer Loader regardless of attachments (Bobcat or Similar); Fork Lift, Power Chipper; Landscape Equipment (including hydroseeder). 35.03 23.55 + a

---

Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

Group 10: Vibratory Hammer, Ice Machine, Diesel and Air Hammer, etc. 32.99 23.55 + a

---

Group 11: Conveyor, Earth Roller; Power Pavement Breaker (whiphammer), Robot Demolition Equipment. 32.99 23.55 + a

---

Group 12: Wellpoint Operator. 32.93 23.55 + a

---

Group 13: Compressor Battery Operator. 32.35 23.55 + a

---

Group 14: Elevator Operator; Tow Motor Operator (Solid Tire No Rough Terrain). 31.21 23.55 + a

---

Group 15: Generator Operator; Compressor Operator; Pump Operator; Welding Machine Operator; Heater Operator. 30.80 23.55 + a

---

Group 16: Maintenance Engineer/Oiler 30.15 23.55 + a

---

Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

Group 17: Portable asphalt plant operator; portable crusher plant operator; portable concrete plant operator. 34.46 23.55 + a

---

Group 18: Power Safety Boat; Vacuum Truck; Zim Mixer; Sweeper; (minimum for any job requiring CDL license). 32.04 23.55 + a

---

\*\*NOTE: SEE BELOW

---

---LINE CONSTRUCTION---(Railroad Construction and Maintenance)---

---

20) Lineman, Cable Splicer, Technician 47.14 6.5% + 20.98

---

21) Heavy Equipment Operator 42.43 6.5% + 18.84

---

22) Equipment Operator, Tractor Trailer Driver, Material Men 40.07 6.5% + 18.27

---

Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

23) Driver Groundmen 25.93 6.5% + 8.53

---

23a) Truck Driver 35.36 6.5% + 16.88

---

---LINE CONSTRUCTION---

---

24) Driver Groundmen 30.92 6.5% + 9.70

---

25) Groundmen 22.67 6.5% + 6.20

---

26) Heavy Equipment Operators 37.10 6.5% + 10.70

---

27) Linemen, Cable Splicers, Dynamite Men 41.22 6.5% + 12.20

---

Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

28) Material Men, Tractor Trailer Drivers, Equipment Operators 35.04 6.5% + 10.45

---

Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

*Welders: Rate for craft to which welding is incidental.*

*\*Note: Hazardous waste removal work receives additional \$1.25 per hour for truck drivers.*

*\*\*Note: Hazardous waste premium \$3.00 per hour over classified rate*

***ALL Cranes: When crane operator is operating equipment that requires a fully licensed crane operator to operate he receives an extra \$3.00 premium in addition to the hourly wage rate and benefit contributions:***

***1) Crane handling or erecting structural steel or stone; hoisting engineer (2 drums or over)***

***2) Cranes (100 ton rate capacity and over) Bauer Drill/Caisson***

***3) Cranes (under 100 ton rated capacity)***

*Crane with 150 ft. boom (including jib) - \$1.50 extra*

*Crane with 200 ft. boom (including jib) - \$2.50 extra*

*Crane with 250 ft. boom (including jib) - \$5.00 extra*

*Crane with 300 ft. boom (including jib) - \$7.00 extra*

*Crane with 400 ft. boom (including jib) - \$10.00 extra*

All classifications that indicate a percentage of the fringe benefits must be calculated at the percentage rate times the "base hourly rate".

Apprentices duly registered under the Commissioner of Labor's regulations on "Work Training Standards for Apprenticeship and Training Programs" Section 31-51-d-1 to 12, are allowed to be paid the appropriate percentage of the prevailing journeymen hourly base and the full fringe benefit rate, providing the work site ratio shall not be less than one full-time journeyman instructing and supervising the work of each apprentice in a specific trade.

*~~Connecticut General Statute Section 31-55a: Annual Adjustments to wage rates by contractors doing state work ~~*

*The Prevailing wage rates applicable to this project are subject to annual adjustments each July 1st for the duration of the project.*

*Each contractor shall pay the annual adjusted prevailing wage rate that is in effect each July 1st, as posted by the Department of Labor.*

*It is the contractor's responsibility to obtain the annual adjusted prevailing wage rate increases directly from the Department of Labor's website.*

*The annual adjustments will be posted on the Department of Labor's Web page: [www.ct.gov/dol](http://www.ct.gov/dol).*

*The Department of Labor will continue to issue the initial prevailing wage rate schedule to the Contracting Agency for the project.*

*All subsequent annual adjustments will be posted on our Web Site for contractor access.*

*Contracting Agencies are under no obligation pursuant to State labor law to pay any increase due to the annual adjustment provision.*

**As of:** Tuesday, February 21, 2017



Project: Parking Lot Expansion And Related Site Improvements At Naugatuck High School

*Effective October 1, 2005 - Public Act 05-50: any person performing the work of any mechanic, laborer, or worker shall be paid prevailing wage*

All Person who perform work ON SITE must be paid prevailing wage for the appropriate mechanic, laborer, or worker classification.

All certified payrolls must list the hours worked and wages paid to All Persons who perform work ON SITE regardless of their ownership i.e.: (Owners, Corporate Officers, LLC Members, Independent Contractors, et. al)

Reporting and payment of wages is required regardless of any contractual relationship alleged to exist between the contractor and such person.

**~~Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clause (29 CFR 5.5 (a) (1) (ii)).**

Please direct any questions which you may have pertaining to classification of work and payment of prevailing wages to the Wage and Workplace Standards Division, telephone (860)263-6790.

*As of:* Tuesday, February 21, 2017

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**



Opportunity \* Guidance \* Support



**THIS IS A PUBLIC WORKS PROJECT**

**Covered by the**

**PREVAILING WAGE LAW**

**CT General Statutes Section 31-53**

**If you have QUESTIONS regarding your wages  
CALL (860) 263-6790**

Section 31-55 of the CT State Statutes requires every contractor or subcontractor performing work for the state to post in a prominent place the prevailing wages as determined by the Labor Commissioner.

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

**Sec. 31-53b. Construction safety and health course. New miner training program. Proof of completion required for mechanics, laborers and workers on public works projects. Enforcement. Regulations. Exceptions.** (a) Each contract for a public works project entered into on or after July 1, 2009, by the state or any of its agents, or by any political subdivision of the state or any of its agents, described in subsection (g) of section 31-53, shall contain a provision requiring that each contractor furnish proof with the weekly certified payroll form for the first week each employee begins work on such project that any person performing the work of a mechanic, laborer or worker pursuant to the classifications of labor under section 31-53 on such public works project, pursuant to such contract, has completed a course of at least ten hours in duration in construction safety and health approved by the federal Occupational Safety and Health Administration or, has completed a new miner training program approved by the Federal Mine Safety and Health Administration in accordance with 30 CFR 48 or, in the case of telecommunications employees, has completed at least ten hours of training in accordance with 29 CFR 1910.268.

(b) Any person required to complete a course or program under subsection (a) of this section who has not completed the course or program shall be subject to removal from the worksite if the person does not provide documentation of having completed such course or program by the fifteenth day after the date the person is found to be in noncompliance. The Labor Commissioner or said commissioner's designee shall enforce this section.

(c) Not later than January 1, 2009, the Labor Commissioner shall adopt regulations, in accordance with the provisions of chapter 54, to implement the provisions of subsections (a) and (b) of this section. Such regulations shall require that the ten-hour construction safety and health courses required under subsection (a) of this section be conducted in accordance with federal Occupational Safety and Health Administration Training Institute standards, or in accordance with Federal Mine Safety and Health Administration Standards or in accordance with 29 CFR 1910.268, as appropriate. The Labor Commissioner shall accept as sufficient proof of compliance with the provisions of subsection (a) or (b) of this section a student course completion card issued by the federal Occupational Safety and Health Administration Training Institute, or such other proof of compliance said commissioner deems appropriate, dated no earlier than five years before the commencement date of such public works project.

(d) This section shall not apply to employees of public service companies, as defined in section 16-1, or drivers of commercial motor vehicles driving the vehicle on the public works project and delivering or picking up cargo from public works projects provided they perform no labor relating to the project other than the loading and unloading of their cargo.

(P.A. 06-175, S. 1; P.A. 08-83, S. 1.)

History: P.A. 08-83 amended Subsec. (a) by making provisions applicable to public works project contracts entered into on or after July 1, 2009, replacing provision re total cost of work with reference to Sec. 31-53(g), requiring proof in certified payroll form that new mechanic, laborer or worker has completed a 10-hour or more construction safety course and adding provision re new miner training program, amended Subsec. (b) by substituting "person" for "employee" and adding "or program", amended Subsec. (c) by adding "or in accordance with Federal Mine Safety and Health Administration Standards" and setting new deadline of January 1, 2009, deleted former Subsec. (d) re "public building", added new Subsec. (d) re exemptions for public service company employees and delivery drivers who perform no labor other than delivery and made conforming and technical changes, effective January 1, 2009.

# **Informational Bulletin**

## **THE 10-HOUR OSHA CONSTRUCTION SAFETY AND HEALTH COURSE**

(applicable to public building contracts entered into *on or after July 1, 2007*, where the total cost of all work to be performed is at least \$100,000)

- (1) This requirement was created by Public Act No. 06-175, which is codified in Section 31-53b of the Connecticut General Statutes (pertaining to the prevailing wage statutes);
- (2) The course is required for public building construction contracts (projects funded in whole or in part by the state or any political subdivision of the state) entered into on or after July 1, 2007;
- (3) It is required of private employees (not state or municipal employees) and apprentices who perform manual labor for a general contractor or subcontractor on a public building project where the total cost of all work to be performed is at least \$100,000;
- (4) The ten-hour construction course pertains to the ten-hour Outreach Course conducted in accordance with federal OSHA Training Institute standards, and, for telecommunications workers, a ten-hour training course conducted in accordance with federal OSHA standard, 29 CFR 1910.268;
- (5) The internet website for the federal OSHA Training Institute is [http://www.osha.gov/fso/ote/training/edcenters/fact\\_sheet.html](http://www.osha.gov/fso/ote/training/edcenters/fact_sheet.html);
- (6) The statutory language leaves it to the contractor and its employees to determine who pays for the cost of the ten-hour Outreach Course;
- (7) Within 30 days of receiving a contract award, a general contractor must furnish proof to the Labor Commissioner that all employees and apprentices performing manual labor on the project will have completed such a course;
- (8) Proof of completion may be demonstrated through either: (a) the presentation of a *bona fide* student course completion card issued by the federal OSHA Training Institute; *or* (2) the presentation of documentation provided to an employee by a trainer certified by the Institute pending the actual issuance of the completion card;
- (9) Any card with an issuance date more than 5 years prior to the commencement date of the construction project shall not constitute proof of compliance;

- (10) Each employer shall affix a copy of the construction safety course completion card to the certified payroll submitted to the contracting agency in accordance with Conn. Gen. Stat. § 31-53(f) on which such employee's name first appears;
- (11) Any employee found to be in non-compliance shall be subject to removal from the worksite if such employee does not provide satisfactory proof of course completion to the Labor Commissioner by the fifteenth day after the date the employee is determined to be in noncompliance;
- (12) Any such employee who is determined to be in noncompliance may continue to work on a public building construction project for a maximum of fourteen consecutive calendar days while bringing his or her status into compliance;
- (13) The Labor Commissioner may make complaint to the prosecuting authorities regarding any employer or agent of the employer, or officer or agent of the corporation who files a false certified payroll with respect to the status of an employee who is performing manual labor on a public building construction project;
- (14) The statute provides the minimum standards required for the completion of a safety course by manual laborers on public construction contracts; any contractor can exceed these minimum requirements; and
- (15) Regulations clarifying the statute are currently in the regulatory process, and shall be posted on the CTDOL website as soon as they are adopted in final form.
- (16) Any questions regarding this statute may be directed to the Wage and Workplace Standards Division of the Connecticut Labor Department via the internet website of <http://www.ctdol.state.ct.us/wgwkstnd/wgemenu.htm>; or by telephone at (860)263-6790.

**THE ABOVE INFORMATION IS PROVIDED EXCLUSIVELY AS AN EDUCATIONAL RESOURCE, AND IS NOT INTENDED AS A SUBSTITUTE FOR LEGAL INTERPRETATIONS WHICH MAY ULTIMATELY ARISE CONCERNING THE CONSTRUCTION OF THE STATUTE OR THE REGULATIONS.**



November 29, 2006

**Notice**  
**To All Mason Contractors and Interested Parties**  
**Regarding Construction Pursuant to Section 31-53 of the**  
**Connecticut General Statutes (Prevailing Wage)**

The Connecticut Labor Department Wage and Workplace Standards Division is empowered to enforce the prevailing wage rates on projects covered by the above referenced statute.

Over the past few years the Division has withheld enforcement of the rate in effect for workers who operate a forklift on a prevailing wage rate project due to a potential jurisdictional dispute.

The rate listed in the schedules and in our Occupational Bulletin (see enclosed) has been as follows:

**Forklift Operator:**

- **Laborers (Group 4) Mason Tenders** - operates forklift solely to assist a mason to a maximum height of nine feet only.
- **Power Equipment Operator (Group 9)** - operates forklift to assist any trade and to assist a mason to a height over nine feet.

The U.S. Labor Department conducted a survey of rates in Connecticut but it has not been published and the rate in effect remains as outlined in the above Occupational Bulletin.

*Since this is a classification matter and not one of jurisdiction, effective January 1, 2007 the Connecticut Labor Department will enforce the rate on each schedule in accordance with our statutory authority.*

Your cooperation in filing appropriate and accurate certified payrolls is appreciated.

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

## STATUTE 31-55a

### - SPECIAL NOTICE -

**To: All State and Political Subdivisions, Their Agents, and Contractors**

**Connecticut General Statute 31-55a - Annual adjustments to wage rates by contractors doing state work.**

*Each contractor that is awarded a contract on or after October 1, 2002, for (1) the construction of a state highway or bridge that falls under the provisions of section 31-54 of the general statutes, or (2) the construction, remodeling, refinishing, refurbishing, rehabilitation, alteration or repair of any public works project that falls under the provisions of section 31-53 of the general statutes shall contact the Labor Commissioner on or before July first of each year, for the duration of such contract, to ascertain the prevailing rate of wages on an hourly basis and the amount of payment or contributions paid or payable on behalf of each mechanic, laborer or worker employed upon the work contracted to be done, and shall make any necessary adjustments to such prevailing rate of wages and such payment or contributions paid or payable on behalf of each such employee, effective each July first.*

- The prevailing wage rates applicable to any contract or subcontract awarded on or after October 1, 2002 are subject to annual adjustments each July 1st for the duration of any project which was originally advertised for bids on or after October 1, 2002.
- Each contractor affected by the above requirement shall pay the annual adjusted prevailing wage rate that is in effect each July 1st, as posted by the Department of Labor.
- It is the **contractor's** responsibility to obtain the annual adjusted prevailing wage rate increases directly from the Department of Labor's Web Site. The annual adjustments will be posted on the Department of Labor Web page: [www.ctdol.state.ct.us](http://www.ctdol.state.ct.us). For those without internet access, please contact the division listed below.
- The Department of Labor will continue to issue the initial prevailing wage rate schedule to the Contracting Agency for the project. All subsequent annual adjustments will be posted on our Web Site for contractor access.

**Any questions should be directed to the Contract Compliance Unit, Wage and Workplace Standards Division, Connecticut Department of Labor, 200 Folly Brook Blvd., Wethersfield, CT 06109 at (860)263-6790.**


**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**


~NOTICE~

TO ALL CONTRACTING AGENCIES

Please be advised that Connecticut General Statutes Section 31-53, requires the contracting agency to certify to the Department of Labor, the total dollar amount of work to be done in connection with such public works project, regardless of whether such project consists of one or more contracts.

Please find the attached “Contracting Agency Certification Form” to be completed and returned to the Department of Labor, Wage and Workplace Standards Division, Public Contract Compliance Unit.

 Inquiries can be directed to (860)263-6543.

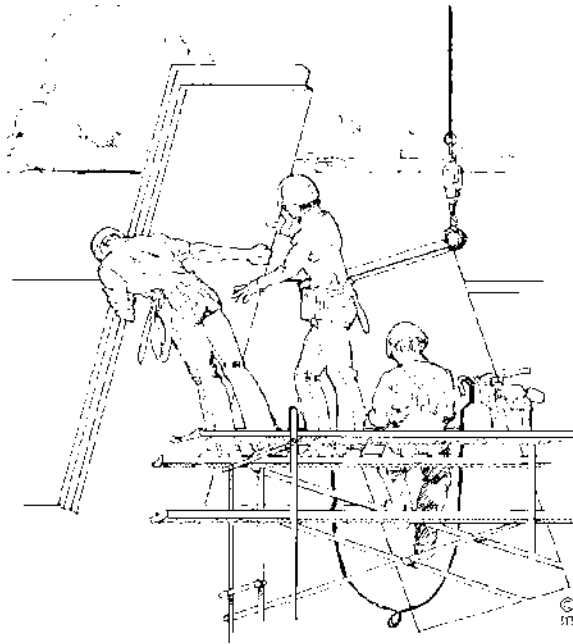

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

CONNECTICUT DEPARTMENT OF LABOR  
WAGE AND WORKPLACE STANDARDS DIVISION  
CONTRACT COMPLIANCE UNIT

*CONTRACTING AGENCY CERTIFICATION FORM*

I, \_\_\_\_\_, acting in my official capacity as \_\_\_\_\_,  
authorized representative title

for \_\_\_\_\_, located at \_\_\_\_\_,  
contracting agency address

do hereby certify that the total dollar amount of work to be done in connection with  
\_\_\_\_\_, located at \_\_\_\_\_,  
project name and number address

shall be \$\_\_\_\_\_, which includes all work, regardless of whether such project  
consists of one or more contracts.

*CONTRACTOR INFORMATION*

Name: \_\_\_\_\_

Address: \_\_\_\_\_

Authorized Representative: \_\_\_\_\_

Approximate Starting Date: \_\_\_\_\_

Approximate Completion Date: \_\_\_\_\_

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Date

Return To: Connecticut Department of Labor  
Wage & Workplace Standards Division  
Contract Compliance Unit  
200 Folly Brook Blvd.  
Wethersfield, CT 06109

Date Issued: \_\_\_\_\_

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**



CONNECTICUT DEPARTMENT OF LABOR  
WAGE AND WORKPLACE STANDARDS DIVISION

**CONTRACTORS WAGE CERTIFICATION FORM**  
**Construction Manager at Risk/General Contractor/Prime Contractor**

I, \_\_\_\_\_ of \_\_\_\_\_  
Officer, Owner, Authorized Rep. Company Name

do hereby certify that the \_\_\_\_\_  
Company Name  
\_\_\_\_\_  
Street  
\_\_\_\_\_  
City

and all of its subcontractors will pay all workers on the  
\_\_\_\_\_  
Project Name and Number  
\_\_\_\_\_  
Street and City

the wages as listed in the schedule of prevailing rates required for such project (a copy of which is attached hereto).

\_\_\_\_\_  
Signed

Subscribed and sworn to before me this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_.

\_\_\_\_\_  
Notary Public

Return to:  
Connecticut Department of Labor  
Wage & Workplace Standards Division  
200 Folly Brook Blvd.  
Wethersfield, CT 06109

Rate Schedule Issued (Date): \_\_\_\_\_

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

[New] In accordance with Section 31-53b(a) of the C.G.S. each contractor shall provide a copy of the OSHA 10 Hour Construction Safety and Health Card for each employee, to be attached to the first certified payroll on the project.

| In accordance with Connecticut General Statutes, 31-53 Certified Payrolls with a statement of compliance shall be submitted monthly to the contracting agency. |             |                       |                     |                        |   |   |   |    |   |                 | <b>PAYROLL CERTIFICATION FOR PUBLIC WORKS PROJECTS</b> |       |                      |                    |   |                          |  |   |                       |  | Connecticut Department of Labor<br>Wage and Workplace Standards Division<br>200 Folly Brook Blvd.<br>Wethersfield, CT 06109 |  |  |  |                     |
|--|-------------|-----------------------|---------------------|------------------------|---|---|---|----|---|-----------------|--|-------|----------------------|--------------------|---|--------------------------|--|---|-----------------------|--|---|--|--|--|---------------------|
| CONTRACTOR NAME AND ADDRESS:   |             |                       |                     |                        |   |   |   |    |   |                 | SUBCONTRACTOR NAME & ADDRESS                           |       |                      |                    |   |                          | WORKER'S COMPENSATION INSURANCE CARRIER    |   |                       |  |   |  |  |  |                     |
| PAYROLL NUMBER   |             | Week-Ending Date      |                     | PROJECT NAME & ADDRESS |   |   |   |    |   |                 | Total ST Hours   |       | BASE HOURLY RATE     |                    | TYPE OF FRINGE BENEFITS Per Hour 1 through 6 (see back) |                          | GROSS PAY FOR ALL WORK PERFORMED THIS WEEK |   | TOTAL DEDUCTIONS      |  |   |  | GROSS PAY FOR THIS PREVAILING RATE JOB |  | CHECK # AND NET PAY |
| PERSON/WORKER, ADDRESS and SECTION   | APPR RATE % | MALE/FEMALE AND RACE* | WORK CLASSIFICATION | DAY AND DATE           |   |   |   |    |   | Total O/T Hours | TOTAL FRINGE BENEFIT PLAN CASH                         | FICA  | FEDERAL WITH-HOLDING | STATE WITH-HOLDING | LIST OTHER  | THIS PREVAILING RATE JOB | CHECK # AND NET PAY                        |   |                       |  |   |  |  |  |                     |
|  |             |                       |                     | S                      | M | T | W | TH | F |                 |  |       |                      |                    |   |                          |  | S | HOURS WORKED EACH DAY |  |   |  |  |  |                     |
|  |             |                       |                     |                        |   |   |   |    |   |                 | \$   | 1. \$ |                      |                    |   |                          |  |   |                       |  |   |  |  |  |                     |
|  |             |                       |                     |                        |   |   |   |    |   |                 | Base Rate  | 2. \$ |                      |                    |   |                          |  |   |                       |  |   |  |  |  |                     |
|  |             |                       |                     |                        |   |   |   |    |   |                 |  | 3. \$ |                      |                    |   |                          |  |   |                       |  |   |  |  |  |                     |
|  |             |                       |                     |                        |   |   |   |    |   |                 | \$   | 4. \$ |                      |                    |   |                          |  |   |                       |  |   |  |  |  |                     |
|  |             |                       |                     |                        |   |   |   |    |   |                 | Cash Fringe  | 5. \$ |                      |                    |   |                          |  |   |                       |  |   |  |  |  |                     |
|  |             |                       |                     |                        |   |   |   |    |   |                 |  | 6. \$ |                      |                    |   |                          |  |   |                       |  |   |  |  |  |                     |
|  |             |                       |                     |                        |   |   |   |    |   |                 | \$   | 1. \$ |                      |                    |   |                          |  |   |                       |  |   |  |  |  |                     |
|  |             |                       |                     |                        |   |   |   |    |   |                 | Base Rate  | 2. \$ |                      |                    |   |                          |  |   |                       |  |   |  |  |  |                     |
|  |             |                       |                     |                        |   |   |   |    |   |                 |  | 3. \$ |                      |                    |   |                          |  |   |                       |  |   |  |  |  |                     |
|  |             |                       |                     |                        |   |   |   |    |   |                 | \$   | 4. \$ |                      |                    |   |                          |  |   |                       |  |   |  |  |  |                     |
|  |             |                       |                     |                        |   |   |   |    |   |                 | Cash Fringe  | 5. \$ |                      |                    |   |                          |  |   |                       |  |   |  |  |  |                     |
|  |             |                       |                     |                        |   |   |   |    |   |                 |  | 6. \$ |                      |                    |   |                          |  |   |                       |  |   |  |  |  |                     |

12/9/2013 \*IF REQUIRED  
WWS-CPI

\*SEE REVERSE SIDE

PAGE NUMBER \_\_\_\_ OF

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

**\*FRINGE BENEFITS EXPLANATION (P):**

Bona fide benefits paid to approved plans, funds or programs, except those required by Federal or State Law (unemployment tax, worker’s compensation, income taxes, etc.).

Please specify the type of benefits provided:

- 1) Medical or hospital care \_\_\_\_\_ 4) Disability \_\_\_\_\_
- 2) Pension or retirement \_\_\_\_\_ 5) Vacation, holiday \_\_\_\_\_
- 3) Life Insurance \_\_\_\_\_ 6) Other (please specify) \_\_\_\_\_

**CERTIFIED STATEMENT OF COMPLIANCE**

For the week ending date of \_\_\_\_\_,

I, \_\_\_\_\_ of \_\_\_\_\_, (hereafter known as Employer) in my capacity as \_\_\_\_\_ (title) do hereby certify and state:

**Section A:**

1. All persons employed on said project have been paid the full weekly wages earned by them during the week in accordance with Connecticut General Statutes, section 31-53, as amended. Further, I hereby certify and state the following:

- a) The records submitted are true and accurate;
- b) The rate of wages paid to each mechanic, laborer or workman and the amount of payment or contributions paid or payable on behalf of each such person to any employee welfare fund, as defined in Connecticut General Statutes, section 31-53 (h), are not less than the prevailing rate of wages and the amount of payment or contributions paid or payable on behalf of each such person to any employee welfare fund, as determined by the Labor Commissioner pursuant to subsection Connecticut General Statutes, section 31-53 (d), and said wages and benefits are not less than those which may also be required by contract;
- c) The Employer has complied with all of the provisions in Connecticut General Statutes, section 31-53 (and Section 31-54 if applicable for state highway construction);
- d) Each such person is covered by a worker’s compensation insurance policy for the duration of his employment which proof of coverage has been provided to the contracting agency;
- e) The Employer does not receive kickbacks, which means any money, fee, commission, credit, gift, gratuity, thing of value, or compensation of any kind which is provided directly or indirectly, to any prime contractor, prime contractor employee, subcontractor, or subcontractor employee for the purpose of improperly obtaining or rewarding favorable treatment in connection with a prime contract or in connection with a prime contractor in connection with a subcontractor relating to a prime contractor; and
- f) The Employer is aware that filing a certified payroll which he knows to be false is a class D felony for which the employer may be fined up to five thousand dollars, imprisoned for up to five years or both.

2. OSHA~The employer shall affix a copy of the construction safety course, program or training completion document to the certified payroll required to be submitted to the contracting agency for this project on which such persons name first appears.

\_\_\_\_\_ (Signature)                      \_\_\_\_\_ (Title)                      \_\_\_\_\_ Submitted on (Date)

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**



**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**



[New] In accordance with Section 31-53b(a) of the C.G.S. each contractor shall provide a copy of the OSHA 10 Hour Construction Safety and Health Card for each employee, to be attached to the first certified payroll on the project.

| PAYROLL CERTIFICATION FOR PUBLIC WORKS PROJECTS  |                  |                        |  |    |  |    |    |    |    | Connecticut Department of Labor<br>Wage and Workplace Standards Division<br>200 Folly Brook Blvd.<br>Wethersfield, CT 06109                           |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
|--|------------------|------------------------|--|----|--|----|----|----|----|---|------------------|---|--|-----------------------------------|------------|----------------------|--------------------|--|---------------------|------------|-------------------|
| In accordance with Connecticut General Statutes, 31-53<br>Certified Payrolls with a statement of compliance<br>shall be submitted monthly to the contracting agency. |                  |                        |  |    |  |    |    |    |    | WEEKLY PAYROLL  |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
| CONTRACTOR NAME AND ADDRESS:<br>Landon Corporation, 15 Connecticut Avenue, Northford, CT 06472   |                  |                        |  |    | SUBCONTRACTOR NAME & ADDRESS<br>XYZ Corporation<br>2 Main Street<br>Yantic, CT 06389 |    |    |    |    | WORKER'S COMPENSATION INSURANCE CARRIER<br>Travelers Insurance Company<br>POLICY # #BAC8888928<br>EFFECTIVE DATE: 1/1/09<br>EXPIRATION DATE: 12/31/09 |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
| PAYROLL NUMBER   | Week-Ending Date | PROJECT NAME & ADDRESS |  |    |  |    |    |    |    | Total ST Hours  | BASE HOURLY RATE | TYPE OF FRINGE BENEFITS Per Hour 1 through 6 (see back) | GROSS PAY FOR ALL WORK PERFORMED THIS WEEK | TOTAL DEDUCTIONS                  |            |                      |                    | GROSS PAY FOR THIS PREVAILING RATE JOB | CHECK # AND NET PAY |            |                   |
|  |                  | DAY AND DATE           |  |    |  |    |    |    |    |   |                  |   |  | Total O/T Hours                   | FICA       | FEDERAL WITH-HOLDING | STATE WITH-HOLDING |  |                     | LIST OTHER |                   |
| PERSON/WORKER, ADDRESS and SECTION   | APPR RATE %      | MALE/FEMALE AND RACE*  | WORK CLASSIFICATION  | S  | M  | T  | W  | TH | F  | S   |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
|  |                  |                        | Trade License Type & Number - OSHA 10 Certification Number | 20 | 21   | 22 | 23 | 24 | 25 | 26  |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
| HOURS WORKED EACH DAY  |                  |                        |  |    |  |    |    |    |    |   |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
| Robert Craft<br>81 Maple Street<br>Willimantic, CT 06226   |                  | M/C                    | Electrical Lineman<br>E-1 1234567<br>Owner<br>OSHA 123456  |    | 8  | 8  | 8  | 8  | 8  |   |                  | S-TIME<br>40  | \$ 30.75<br>Base Rate                      | 1. \$ 5.80<br>2. \$<br>3. \$ 2.01 | \$1,582.80 |                      |                    |  | P-xxxx              | \$1,582.80 | #123<br>\$ xxx.xx |
|  |                  |                        |  |    |  |    |    |    |    |   | O-TIME           | \$ 8.82<br>Cash Fringe                                  | 4. \$<br>5. \$<br>6. \$                    |                                   |            |                      |                    |  |                     |            |                   |
|  |                  |                        |  |    |  |    |    |    |    |   |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
|  |                  |                        |  |    |  |    |    |    |    |   |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
|  |                  |                        |  |    |  |    |    |    |    |   |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
|  |                  |                        |  |    |  |    |    |    |    |   |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
| Ronald Jones<br>212 Elm Street<br>Norwich, CT 06360  | 65%              | M/B                    | Electrical<br>Apprentice<br>OSHA 234567                    |    | 8  | 8  | 8  | 8  | 8  |   |                  | S-TIME<br>40  | \$ 19.99<br>Base Rate                      | 1. \$<br>2. \$<br>3. \$           | \$1,464.80 | xx.xx                | xxx.xx             | xx.xx                                  | G-xxx               | \$1,464.80 | #124<br>\$xxx.xx  |
|  |                  |                        |  |    |  |    |    |    |    |   | O-TIME           | \$ 16.63<br>Cash Fringe                                 | 4. \$<br>5. \$<br>6. \$                    |                                   |            |                      |                    |  |                     |            |                   |
|  |                  |                        |  |    |  |    |    |    |    |   |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
|  |                  |                        |  |    |  |    |    |    |    |   |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
|  |                  |                        |  |    |  |    |    |    |    |   |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
|  |                  |                        |  |    |  |    |    |    |    |   |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
| Franklin T. Smith<br>234 Washington Rd.<br>New London, CT<br>06320<br>SECTION B  |                  | M/H                    | Project Manager  |    |  | 8  |    |    |    |   |                  | S-TIME<br>8   | \$<br>Base Rate                            | 1. \$<br>2. \$<br>3. \$           | \$1,500.00 | xx.xx                | xx.xx              | xx.xx                                  | M-xx.x              |            | xxx.xx            |
|  |                  |                        |  |    |  |    |    |    |    |   | O-TIME           | \$<br>Cash Fringe                                       | 4. \$<br>5. \$<br>6. \$                    |                                   |            |                      |                    |  |                     |            |                   |
|  |                  |                        |  |    |  |    |    |    |    |   |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
|  |                  |                        |  |    |  |    |    |    |    |   |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
|  |                  |                        |  |    |  |    |    |    |    |   |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |
|  |                  |                        |  |    |  |    |    |    |    |   |                  |   |  |                                   |            |                      |                    |  |                     |            |                   |

7/13/2009 \*IF REQUIRED  
WWS-CP1

\*SEE REVERSE SIDE

PAGE NUMBER 1 OF 2

OSHA 10 ~ATTACH CARD TO 1ST CERTIFIED PAYROLL

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

**\*FRINGE BENEFITS EXPLANATION (P):**

Bona fide benefits paid to approved plans, funds or programs, except those required by Federal or State Law (unemployment tax, worker's compensation, income taxes, etc.).

Please specify the type of benefits provided:

- 1) Medical or hospital care Blue Cross 4) Disability \_\_\_\_\_
- 2) Pension or retirement \_\_\_\_\_ 5) Vacation, holiday \_\_\_\_\_
- 3) Life Insurance Utopia 6) Other (please specify) \_\_\_\_\_

**CERTIFIED STATEMENT OF COMPLIANCE**

For the week ending date of 9/26/09,

I, Robert Craft of XYZ Corporation, (hereafter known as

Employer) in my capacity as Owner (title) do hereby certify and state:

**Section A:**

1. All persons employed on said project have been paid the full weekly wages earned by them during the week in accordance with Connecticut General Statutes, section 31-53, as amended. Further, I hereby certify and state the following:

- a) The records submitted are true and accurate;
- b) The rate of wages paid to each mechanic, laborer or workman and the amount of payment or contributions paid or payable on behalf of each such employee to any employee welfare fund, as defined in Connecticut General Statutes, section 31-53 (h), are not less than the prevailing rate of wages and the amount of payment or contributions paid or payable on behalf of each such employee to any employee welfare fund, as determined by the Labor Commissioner pursuant to subsection Connecticut General Statutes, section 31-53 (d), and said wages and benefits are not less than those which may also be required by contract;
- c) The Employer has complied with all of the provisions in Connecticut General Statutes, section 31-53 (and Section 31-54 if applicable for state highway construction);
- d) Each such employee of the Employer is covered by a worker's compensation insurance policy for the duration of his employment which proof of coverage has been provided to the contracting agency;
- e) The Employer does not receive kickbacks, which means any money, fee, commission, credit, gift, gratuity, thing of value, or compensation of any kind which is provided directly or indirectly, to any prime contractor, prime contractor employee, subcontractor, or subcontractor employee for the purpose of improperly obtaining or rewarding favorable treatment in connection with a prime contract or in connection with a prime contractor in connection with a subcontractor relating to a prime contractor; and
- f) The Employer is aware that filing a certified payroll which he knows to be false is a class D felony for which the employer may be fined up to five thousand dollars, imprisoned for up to five years or both.

2. OSHA~The employer shall affix a copy of the construction safety course, program or training completion document to the certified payroll required to be submitted to the contracting agency for this project on which such employee's name first appears.

Robert Craft owner 10/2/09  
 (Signature) (Title) Submitted on (Date)

**Section B: Applies to CONNDOT Projects ONLY**

That pursuant to CONNDOT contract requirements for reporting purposes only, all employees listed under Section B who performed work on this project are not covered under the prevailing wage requirements defined in Connecticut General Statutes Section 31-53.

Robert Craft owner 10/2/09  
 (Signature) (Title) Submitted on (Date)

Note: CTDOL will assume all hours worked were performed under Section A unless clearly delineated as Section B WWS-CP1 as such. Should an employee perform work under both Section A and Section B, the hours worked and wages paid must be segregated for reporting purposes.

**\*\*\*THIS IS A PUBLIC DOCUMENT\*\*\*  
 \*\*\*DO NOT INCLUDE SOCIAL SECURITY NUMBERS\*\*\***

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

**Connecticut Department of Labor  
Wage and Workplace Standards Division  
FOOTNOTES**

⇒ Please Note: If the “Benefits” listed on the schedule for the following occupations includes a letter(s) (+ a or + a+b for instance), refer to the information below.

Benefits to be paid at the appropriate prevailing wage rate for the listed occupation.

If the “Benefits” section for the occupation lists only a dollar amount, disregard the information below.

**Bricklayers, Cement Masons, Cement Finishers, Concrete Finishers, Stone Masons  
(Building Construction) and  
(Residential- Hartford, Middlesex, New Haven, New London and Tolland Counties)**

- a. Paid Holiday: Employees shall receive 4 hours for Christmas Eve holiday provided the employee works the regularly scheduled day before and after the holiday. Employers may schedule work on Christmas Eve and employees shall receive pay for actual hours worked in addition to holiday pay.

**Elevator Constructors: Mechanics**

- a. Paid Holidays: New Year’s Day, Memorial Day, Independence Day, Labor Day, Veterans’ Day, Thanksgiving Day, Christmas Day, plus the Friday after Thanksgiving.
- b. Vacation: Employer contributes 8% of basic hourly rate for 5 years or more of service or 6% of basic hourly rate for 6 months to 5 years of service as vacation pay credit.

**Glaziers**

- a. Paid Holidays: Labor Day and Christmas Day.

**Power Equipment Operators  
(Heavy and Highway Construction & Building Construction)**

- a. Paid Holidays: New Year’s Day, Good Friday, Memorial day, Independence Day, Labor Day, Thanksgiving Day and Christmas Day, provided the employee works 3 days during the week in which the holiday falls, if scheduled, and if scheduled, the working day before and the working day after the holiday. Holidays falling on Saturday may be observed on Saturday, or if the employer so elects, on the preceding Friday.

**Ironworkers**

- a. Paid Holiday: Labor Day provided employee has been on the payroll for the 5 consecutive work days prior to Labor Day.

**Laborers (Tunnel Construction)**

- a. Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Christmas Day. No employee shall be eligible for holiday pay when he fails, without cause, to work the regular work day preceding the holiday or the regular work day following the holiday.

**Roofers**

- a. Paid Holidays: July 4<sup>th</sup>, Labor Day, and Christmas Day provided the employee is employed 15 days prior to the holiday.

**Sprinkler Fitters**

- a. Paid Holidays: Memorial Day, July 4th, Labor Day, Thanksgiving Day and Christmas Day, provided the employee has been in the employment of a contractor 20 working days prior to any such paid holiday.

**Truck Drivers**

(Heavy and Highway Construction & Building Construction)

- a. Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Christmas day, and Good Friday, provided the employee has at least 31 calendar days of service and works the last scheduled day before and the first scheduled day after the holiday, unless excused.

## SECTION 01 10 00 – SUMMARY

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. Instructions to Bidders, General Conditions, Supplementary General Conditions, and Division 01 General Requirements are bound herein, are hereby made a part of this Section, and shall be binding on the Contractor and all Subcontractors who perform this work.

#### 1.2 SUMMARY

- A. This Section includes the following:
  - 1. Project information.
  - 2. Work covered by the Contract Documents.
  - 3. Use of premises.
  - 4. Coordination with occupants.
  - 5. Work restrictions.
  - 6. Specification formats and conventions.
  - 7. Miscellaneous provisions.
- B. Related Sections include the following:
  - 1. Division 01 Section “Alternates” for alternate bidding requirements.
  - 2. Division 01 Section “Temporary Facilities and Controls” for limitations and procedures governing temporary use of Owner’s facilities.

#### 1.3 PROJECT INFORMATION

- A. Project Identification: Parking Lot Expansion and Related Site Improvements
  - 1. Project Location: 543 Rubber Avenue, Naugatuck, CT 06770
- B. Owner: Borough of Naugatuck.
- C. Architect Identification: The Contract Documents were prepared for Project by Kaestle Boos Associates, Inc.

#### 1.4 WORK COVERED BY CONTRACT DOCUMENTS

- A. The Work consists of the following:
  - 1. The project involves the construction of an additional 40 car parking lot adjacent to the existing Naugatuck High School as well as parking improvements to an existing high school parking lot off of Millville Avenue. The lower parking lot (parking lot B)

expansion will utilize porous asphalt pavement and an underdrainage system. Repairs to the upper parking lot (parking lot A) will utilize conventional asphalt paving.

B. The Work includes, but is not necessarily limited to:

1. Sawcutting and pavement removal.
2. Clearing and grubbing
3. Fence and footing removal
4. Pavement base aggregate
5. Rip rap reinforced slopes
6. Fine grading
7. Porous asphalt pavement and underdrainage
8. Conventional concrete and asphalt pavement
9. Precast concrete curbing
10. Storm drainage improvements
11. Metal guiderail
12. Concrete footings
13. Chainlink fencing and gates
14. Seeded lawns and Planting
15. Utility removal
16. Parking lot Line striping

#### 1.5 WORK SEQUENCE

A. General: The Contractor shall provide a detailed construction schedule, to be submitted to the Owner, Architect, and Owner's Representative for review and approval.

#### 1.6 CONTRACTOR USE OF PREMISES

A. General: The Contractor shall have limited use of premises for construction operations as determined by the Owner.

B. Work Area Security: Continuously maintain the security of the work area and the Work. Cooperate with the Owner in particularly sensitive areas where security and special safeguards are required.

#### 1.7 COORDINATION WITH OCCUPANTS

A. Partial Owner Occupancy: Owner will occupy the premises during entire construction period, with the exception of areas under construction. Cooperate with Owner during construction operations to minimize conflicts and facilitate Owner usage. Perform the Work so as not to interfere with Owner's operations. Maintain existing exits, unless otherwise indicated.

1. Maintain access to existing walkways and other adjacent occupied or used facilities. Do not close or obstruct walkways, or other occupied or used facilities without written permission from Owner and authorities having jurisdiction.
2. Provide not less than 72 hours' notice to Owner of activities that will affect Owner's operations.



## 1.8 WORK RESTRICTIONS

- A. On-Site Work Hours: Work shall be generally performed on site during normal business working hours of 7:00 a.m. to 4:00 p.m., Monday through Friday, except otherwise indicated.
1. Weekend Hours: Coordinate with Owner's Representative.
  2. Early Morning Hours: Coordinate with Owner's Representative.
  3. Hours for Utility Shutdowns: Coordinate with Owner's Representative.
- B. Existing Utility Interruptions: Do not interrupt utilities serving facilities occupied by Owner or others unless permitted under the following conditions and then only after providing temporary utility services according to requirements indicated:
1. Notify Owner not less than two days in advance of proposed utility interruptions.
  2. Obtain Owner's written permission before proceeding with utility interruptions.
- C. Noise, Vibration, and Odors: Coordinate operations that may result in high levels of noise and vibration, odors, or other disruption to Owner occupancy with Owner.
1. Notify Owner not less than two days in advance of proposed disruptive operations.
  2. Obtain Owner's written permission before proceeding with disruptive operations.
- D. Smoking is not permitted on site.
- E. Employee Identification: Provide identification tags for Contractor personnel working on Project site. Require personnel to use identification tags at all times.

## 1.9 CODES, STANDARDS AND PERMITS

- A. All work under this contract shall conform to all codes and standards in effect as of the date of receipt of Bids which are applicable to this Project. All work shall further conform to specific requirements and interpretations of local authorities having jurisdiction over the Project, These Codes, standards, and authorities are referred to collectively as "the governing codes and authorities", and similar terms, throughout the Specifications. Determination of applicable codes and standards and of the authorities having jurisdiction, shall be the responsibility of each Contractor, as shall be the analysis of all such codes and standards in regard to their applicability to the Project for the purposes of determining necessary construction to conform to such code requirements, for securing all approvals and permits necessary to proceed with construction, and to obtain all permits necessary for the Owner to occupy the facilities for their intended use. In the case of conflicts between the requirements of different codes and standards, the most restrictive or stringent requirements shall be met.
- B. The codes that were used in the design of the Project are as follows:
1. Connecticut State Building Code, 2005 Edition, including all referenced standards, and the 2009, 2011 and 2013 CT Amendments.
  2. Connecticut General Statutes.
  3. Current OSHA – Title 29/Labor.
  4. The Americans with Disabilities Act, Title III, including 2010 ADA Standards.

- C. Code Enforcement and Approvals: Secure the general building permit for the work, for which all fees will be paid by the Owner. Conform to all conditions and requirements of the permit and code enforcement authorities. Provide names and license numbers of its responsible representatives to complete application for permit.
  - 1. Upon receipt of the permit, promptly distribute copies thereof to Owner, Owner's Representative, and Architect.
- D. Identify all permits required from authorities having jurisdiction over the Project for the construction and occupancy of the work. Prepare the necessary applications and submit required plans and documents to obtain such permits in a timely manner.
  - 1. Display all permit cards as required by the authorities, and deliver legible photocopies of all permits to the Owner, Owner's Representative, and Architect promptly upon their receipt.
  - 2. Arrange for all inspections, testing and approvals required for all permits. Notify the Owner, Owner's Representative, and Architect at least three business days in advance, so they may arrange to observe.
  - 3. Comply with all conditions and provide all notices required by all permits.
  - 4. Perform and/or arrange for and pay for all testing and inspections required by the governing codes and authorities, and notify the Owner, Owner's Representative, and Architect of such inspections at least three business days in advance, so they may arrange to observe.
  - 5. Where inspecting authorities require corrective work in conjunction with applicable codes and authorities, promptly comply with such requirements, except in cases where such requirements clearly exceed the requirements of the Contract Documents, in which case proceed in accordance with the procedures for modifications or change to the Work established in the Contract Documents, as amended.

#### 1.10 SPECIFICATION FORMATS AND CONVENTIONS

- A. These Specifications with the accompanying Drawings are intended to describe and illustrate all material, labor, and equipment necessary to complete the work.
- B. Specification Format: The Specifications are organized into Divisions and Sections using the 48-division format and CSI/CSC's "MasterFormat" numbering system.
  - 1. Section Identification: The Specifications use Section numbers and titles to help cross-referencing in the Contract Documents. Sections in the Project Manual are in numeric sequence; however, the sequence is incomplete because all available Section numbers are not used. Consult the table of contents at the beginning of the Project Manual to determine numbers and names of Sections in the Contract Documents.
  - 2. Division 01: Sections in Division 01 govern the execution of the Work of all Sections in the Specifications.
- C. Specification Content: The Specifications use certain conventions for the style of language and the intended meaning of certain terms, words, and phrases when used in particular situations. These conventions are as follows:

1. Abbreviated Language: Language used in the Specifications and other Contract Documents is abbreviated. Words and meanings shall be interpreted as appropriate. Words implied, but not stated, shall be inferred as the sense requires. Singular words shall be interpreted as plural, and plural words shall be interpreted as singular where applicable as the context of the Contract Documents indicates.
  2. Imperative mood and streamlined language are generally used in the Specifications. Requirements expressed in the imperative mood are to be performed by Contractor. Occasionally, the indicative or subjunctive mood may be used in the Section Text for clarity to describe responsibilities that must be fulfilled indirectly by Contractor or by others when so noted.
    - a. The words "shall," "shall be," or "shall comply with," depending on the context, are implied where a colon (:) is used within a sentence or phrase.
- D. In general, the Specifications will describe the “quality” of the work and the Drawings, the “extent” of the work. The Drawings and Specifications are cooperative and supplementary, however, and each item of the work is not necessarily mentioned in both the Drawings and the Specifications. All work necessary to complete the project, so described, is to be included in this Contract.
- E. In case of disagreement between Drawings and Specifications, or within either document itself, the Architect shall construe the Documents to require the better quality or greater quantity of work for the Owner that can reasonably be construed therefrom. Any work done by the Contractor without consulting the Architect, when the same requires a decision, shall be done at the Contractor’s risk.
- 1.11 SOCIAL SECURITY TAXES
- A. The Contractor and each Subcontractor shall pay the taxes measured by the wages of all their employees as required by the Federal Social Security Act all amendments thereto, and accept the exclusive liability for said taxes. The Contractor shall also indemnify and hold the Owner, and its respective officers, agents and servants, the Owner’s Representative and the Architect harmless on account of any tax measured by the wages aforesaid of employees of the Contractor and his Subcontractors, assessed against the Owner under authority of said law.
- 1.12 UNEMPLOYMENT INSURANCE
- A. The Contractor and each Subcontractor shall pay unemployment insurance measured by the wages of his employees as required by law and accept the exclusive liability for said contributions. The Contractor shall also indemnify and hold harmless the Owner, the Owner’s Representative and the Architect on account of any contribution measured by the wages of aforesaid employees of the Contractor and his Subcontractors, assessed against the Owner under authority of law.

1.13 OCCUPATIONAL SAFETY AND HEALTH ACT

- A. The Contractor shall comply with the requirements of the Occupational Safety and Health Act of 1970 and the Construction Safety Act of 1969, including all standards and regulations which have been promulgated by the Governmental Authorities which administer such Acts and said requirements, standards and regulations are incorporated herein by reference.
  - 1. In accordance with Connecticut General Statutes Sec. 31-53b, all employees on the Project site must show proof of completing and maintaining the OSHA 10 hour certification requirements in accordance with federal OSHA Training Institute standards.
- B. The Contractor shall comply with said regulations, requirements and standards and require and be directly responsible for compliance therewith on the part of his agents, employees material men and Subcontractors; and shall directly receive and be responsible for all citations, assessments, fines or penalties which may be incurred by reason of his agents, employees, material men or Subcontractors failing to so comply.
- C. The Contractor shall indemnify the Owner, the Owner's Representative and Architect and save them harmless from any and all losses, costs and expenses, including fines and reasonable attorney's fees incurred by the Owner, and Architect by reason of the real or alleged violation of such laws. Ordinances, regulations and directives, Federal, State, and Local, which are currently in effect or which become effective in the future, by the Contractor, his Subcontractors or material men.

PART 2 - PRODUCTS (Not applicable)

PART 3 - EXECUTION (Not applicable)

END OF SECTION 01 10 00

## **SECTION 01 22 00 – UNIT PRICES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### **1.2 SUMMARY**

- A. This Section includes administrative and procedural requirements for unit prices.
- B. Related Sections include the following:
  - 1. Division 01 Section "Contract Modification Procedures" for procedures for submitting and handling Change Orders.
  - 2. Division 01 Section "Quality Requirements" for general testing and inspecting requirements.

#### **1.3 DEFINITIONS**

- A. Unit price is an amount proposed by bidders, stated on the Bid Form, as a price per unit of measurement for materials or services added to or deducted from the Contract Sum by appropriate modification, if estimated quantities of Work required by the Contract Documents are increased or decreased.
- B. Abbreviations: The following abbreviations for units of measurement are used in unit prices:
  - 1. C.Y.: cubic yard
  - 2. S.Y.: square yard
  - 3. S.F.: square foot
  - 4. L.F.: linear foot
  - 5. EA.: each
  - 6. LB.: pound

#### **1.4 PROCEDURES**

- A. Unit prices include all necessary material, plus cost for delivery, installation, insurance, overhead and profit.
  - 1. Unit prices include all necessary material, plus cost for delivery, installation, insurance, overhead and profit.
  - 2. For deleted work, the net credit to the Contract Sum shall be 10% less.

- B. Owner reserves the right to reject Contractor's measurement of work-in-place that involves use of established unit prices and to have this work measured, at Owner's expense, by an independent surveyor acceptable to Contractor.
- C. List of Unit Prices: A list of unit prices is included in Part 3. Specification Sections referenced in the schedule contain requirements for materials described under each unit price.

## PART 2 - PRODUCTS (Not Used)

## PART 3 - EXECUTION

### 3.1 LIST OF UNIT PRICES

- A. Provide the following unit prices as listed on the Bid Form:
  - 1. Mass Earth Excavation:
    - a. Description: Mass Earth Excavation including the completion of the excavation, formation and compaction of the subgrade, and the disposal of surplus or unsuitable material according to Division 31 Section "Earth Moving."
    - b. Unit of Measurement: C.Y.
  - 2. Trench Earth Excavation:
    - a. Description: Trench Earth Excavation including the completion of the excavation, formation and compaction of the subgrade, and the disposal of surplus or unsuitable material according to Division 31 Section "Earth Moving."
    - b. Unit of Measurement: C.Y.
  - 3. Asphalt Pavement for Patching:
    - a. Description: Asphalt Pavement for (1 ½" top course , 2" binder course) patching, including supplementing base aggregate, sawcutting and pavement removal according to Division 32 Section "Asphalt Paving."
    - b. Unit of Measurement: S.Y.
  - 4. Unsuitable Soils:
    - a. Description: Remove and replace with compacted processed aggregate according to Division 31 Section "Earth Moving"
    - b. Unit of Measurement: C.Y.
  - 5. Processed Aggregate:
    - a. Description: Processed Aggregate (in place) including compaction according to Division 31 Section "Earth Moving."
    - b. Unit of Measurement: C.Y.

6. 6 Foot Galvanized Steel Chain Link Fence:
  - a. Description: 6 foot Galvanized Steel Chain Link Fence according to Division 32 Section "Chain Link Fences and Gates" Detail 7, Sheet L5.01.
  - b. Unit of Measurement: L.F.
  
7. Separation Fabric:
  - a. Description: Separation Fabric according to Division 31 Section "Earth Moving."
  - b. Unit of Measurement: S.F.
  
8. CTDOT Modified Rip Rap:
  - a. Description: Supply and installation of modified rip rap, including removal of topsoil, compaction of the subgrade and placement of geotextile separation fabric according to Division 31 Section "Earth Moving." Detail 1, Sheet L5.02.
  - b. Unit of Measurement: S.Y.

END OF SECTION 01 22 00

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**



## SECTION 01 26 00 - CONTRACT MODIFICATION PROCEDURES

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### 1.2 SUMMARY

- A. This Section specifies administrative and procedural requirements for handling and processing Contract modifications.
- B. Related Sections include the following:
  - 1. Division 01 Section "Product Requirements" for administrative procedures for handling requests for substitutions made after Contract award.

#### 1.3 MINOR CHANGES IN THE WORK

- A. Architect will issue supplemental instructions authorizing Minor Changes in the Work, not involving adjustment to the Contract Sum or the Contract Time, as follows:
  - 1. **"Architect's Supplemental Instruction" (ASI)** form, included at end of Part 3, is an Owner/Architect-initiated supplemental instruction.
    - a. Architect's Supplemental Instructions, including attachments, will be issued to the contractor electronically via email, in the form of a "portable document file" (.PDF).

#### 1.4 CONTRACTOR REQUEST FOR INFORMATION

- A. Contractor-Initiated Requests for Information: If clarification is required to the Contract Documents, the Contractor may submit a "Request for Information" (RFI) to the Architect. This request will be responded to by the Architect with a "Response to Request for Information" (RRFI) form.
  - 1. RFI forms shall be submitted in a typewritten, standardized format, including title and description, and sequentially numbered.
  - 2. Submit RFI, including attachments, electronically in the form of a "portable document file" (.PDF).
  - 3. RFI forms are not to be submitted as requests for shop drawing approval. Comply with requirements in Division 01 Section "Submittal Procedures."
  - 4. **"Response to Request for Information" (RRFI)**, included at the end of Part 3, will be issued in response to Contractor's Request for Information (RFI).

- a. A Response to Request for Information (RRFI), including attachments, will be issued to the contractor electronically via email, in the form of a “portable document file” (.PDF).
- b. If the RRFI directs the Contractor to carry out the Work with no change in Contract Sum or Contract Time, but the Contractor anticipates a change associated with the Work, the Contractor must submit to the Architect in writing within 5 days of receipt of the RRFI, the reason for the anticipated change in Contract Sum and/or Contract Time. A change in Contract Time must be submitted with a revised CPM Schedule in accordance with Division 01 Section “Construction Progress Documentation.”

## 1.5 PROPOSAL REQUESTS

- A. Owner-Initiated Proposal Requests: Architect will issue a detailed description of proposed changes in the Work that may require adjustment to the Contract Sum or the Contract Time. If necessary, the description will include supplemental or revised Drawings and Specifications.
  1. **“Proposal Requests” (PR)** included at the end of Part 3, including attachments, will be issued to the contractor electronically via email, in the form of a “portable document file” (.PDF).
  2. **“Proposal Requests” (PR)** issued by the Architect are for information only. Do not consider them instructions either to stop work in progress or to execute the proposed change.
  3. Within **21 days** after receipt of Proposal Request, submit a quotation estimating cost adjustments to the Contract Sum and the Contract Time necessary to execute the change.
    - a. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
    - b. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
    - c. Include an updated Contractor's Construction Schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
- B. Contractor-Initiated Proposals: If latent or unforeseen conditions require modifications to the Contract, Contractor may propose changes by first submitting a “Request for Information” (RFI) to Architect. This request will be responded to by the Architect with a “Response to Request for Information” form, wherein the Contractor may submit a Change Order Proposal.
  1. Include a statement outlining reasons for the change and the effect of the change on the Work. Provide a complete description of the proposed change. Indicate the effect of the proposed change on the Contract Sum and the Contract Time.
  2. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
  3. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.

4. Include an updated Contractor's Construction Schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
  5. Comply with requirements in Division 01 Section "Product Requirements" if the proposed change requires substitution of one product or system for product or system specified.
- C. Change Order Proposal Form: Use **AIA Document G709**, or similar document, for Change Order Proposals.
1. Submit Change Order Proposals (COP), including attachments, electronically in the form of a "portable document file" (.PDF).
  2. Each Change Order Proposal is to include reference to the initiating document (PR, RRFI, etc.), a title and description, and be sequentially numbered.
  3. **"Response to Change Order Request" (RCOR)**, included at the end of Part 3, will be issued in response to Contractor's Change Order Request (COR).
    - a. A Response to Change Order Request (RCOR) will be issued to the Contractor electronically via email, in the form of a "portable document file" (.PDF).
    - b. Following review of a COR by the Architect, if corrections are required prior to inclusion in a Change Order, resubmit revised COR with revision number and include all backup documentation.
- 1.6 CHANGE ORDER PROCEDURES
- A. On Owner's approval of a Proposal Request, Architect will issue a Change Order for signatures of Owner and Contractor on **AIA Document G701**.
- 1.7 CONSTRUCTION CHANGE DIRECTIVE
- A. Construction Change Directive: Architect may issue a Construction Change Directive on **AIA Document G714**. Construction Change Directive instructs Contractor to proceed with a change in the Work, for subsequent inclusion in a Change Order.
1. Construction Change Directive contains a complete description of change in the Work. It also designates method to be followed to determine change in the Contract Sum or the Contract Time.
- B. Documentation: Maintain detailed records of time and material for work required by the Construction Change Directive.
1. After completion of change, submit a Changer Order Proposal associated with the Work of a Construction Change Directive, including an itemized account and supporting data necessary to substantiate cost and time adjustments to the Contract.
  2. The Architect will prepare a Change Order upon approval by the Architect and Owner of a Change Order Proposal.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 FORMS

A. The following forms referenced in this Section are attached:

1. ASI – Architect’s Supplemental Instructions, 1 page.
2. RRFI – Response to Request for Information, 1 page.
3. PR – Proposal Request, 1 page.
4. RCOR – Response to Change Order Request, 1 page.

END OF SECTION 01 26 00

---

# ASI - ARCHITECT'S SUPPLEMENTAL INSTRUCTIONS

---

**PROJECT**  
City, State

KBA #  
Page: 1 of 1

---

**CONTRACTOR: GENERAL CONTRACTOR OR CM**  
(or CM) Address  
City, State, Zip  
Attn: M.

**ASI NO. (3 digit)-(2 digit)**

**ISSUED BY:** (Name and Credentials)  
(Project Architect, Landscape Architect, etc.)

- COPIES TO:**
- KBA – CT/MA
  - Owner
  - Official
  - Consultant
  - Consultant

**DATE:** (Month, Day, Year)

---

The Work shall be carried out in accordance with the following supplemental instructions issued in accordance with the Contract Documents without change in Contract Sum or Contract Time. Proceeding with the Work in accordance with these instructions indicates your acknowledgement that there will be no change in the Contract Sum or Contract Time. If the Contractor believes that additional cost or time is involved, the Contractor shall make Claims as provided in the General Conditions of the Contract.

---

**Description: ASI Title**

Description of work.....

**Attachments:** Sketches, Bulletins, etc.

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

---

# RRFI – RESPONSE TO REQUEST FOR INFORMATION

---

**PROJECT**  
City, State

KBA #  
Page: 1 of 1

---

**CONTRACTOR: (or CM)**      **GENERAL CONTRACTOR OR CM**  
Address  
City, State, Zip  
Attn: M.

**RRFI NO.: (3 digit)-(2 digit)**

**ISSUED BY:**      (Name and Credentials)  
(Project Architect, Landscape Architect, etc.)

- COPIES TO:**
- KBA – CT/MA
  - Owner
  - Official
  - Consultant
  - Consultant

**DATE:**      (Month, Day, Year)

---

The Work shall be carried out in accordance with the following supplemental instructions issued in accordance with the Contract Documents without change in Contract Sum or Contract Time. Proceeding with the Work in accordance with these instructions indicates your acknowledgement that there will be no change in the Contract Sum or Contract Time. If the Contractor believes that additional cost or time is involved, the Contractor shall make Claims as provided in the General Conditions of the Contract.

---

**Description: RRFI Title**

Response.....

**Attachments: RFI #**

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**



---

# PR – PROPOSAL REQUEST

---

**PROJECT**  
City, State

KBA #  
Page: 1 of 1

---

**CONTRACTOR:**    **GENERAL CONTRACTOR OR CM**  
**(or CM)**            Address  
                          City, State, Zip  
                          Attn: M.

**PR NO. (3 digit)-(2 digit)**

**ISSUED BY:**        (Name and Credentials)  
                          (Project Architect, Landscape Architect, etc.)

**DATE:**              (Month, Day, Year)

**COPIES TO:**

- KBA – CT/MA
- Owner
- Official
- Consultant
- Consultant

---

*Please submit an itemized quotation for changes in the Contract Sum and/or Contract Time for proposed modifications to the Contract Documents described herein. Notify the Architect in writing of the date on which you anticipate submitting your proposal.*

***THIS IS NOT A CHANGE ORDER, CONSTRUCTION CHANGE DIRECTIVE, OR A DIRECTION TO PROCEED WITH THE WORK DESCRIBED IN THE PROPOSED MODIFICATIONS.***

---

**Description: PR Title**

Response .....

**Attachments:**

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

---

# RCOP – RESPONSE TO CHANGE ORDER PROPOSAL

---

**PROJECT**  
City, State

KBA #  
Page: 1 of 1

---

**CONTRACTOR: GENERAL CONTRACTOR OR CM**  
(or CM) Address  
City, State, Zip  
Attn: M.

**RCOP NO. (3 digit)-(2 digit)**

**ISSUED BY:** (Name and Credentials)  
(Project Architect, Landscape Architect, etc.)

**COPIES TO:**  
 KBA – CT/MA/NH  
 Owner  
 Official  
 Consultant  
 Consultant

**DATE:** (Month, Day, Year)

- 
- Change Order Proposal has been reviewed by the Architect and is recommended to the Owner for approval.**
- Change Order Proposal is rejected.**
- Owner will not require the Contractor to proceed with the Work described in Change Order Proposal*
- Work described in Change Order Proposal is required by the Contract Documents.*     *Refer to comments below.*
- Revise and resubmit Change Order Proposal.**
- Overhead/Profit is incorrect.*                       *Labor and material costs breakdown is insufficient.*
- Backup documentation is insufficient.*     *Refer to comments below.*

---

**Description: RCOP Title**

Response.....

**Attachments:** COP No.

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

## **SECTION 01 29 00 - PAYMENT PROCEDURES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### **1.2 SUMMARY**

- A. This Section specifies administrative and procedural requirements necessary to prepare and process Applications for Payment.
- B. Related Sections include the following:
  - 1. Division 01 Section "Contract Modification Procedures" for administrative procedures for handling changes to the Contract.
  - 2. Division 01 Section "Unit Prices" for administrative requirements governing use of unit prices.
  - 3. Division 01 Section "Construction Progress Documentation" for administrative requirements governing preparation and submittal of Contractor's Construction Schedule and Submittals Schedule.

#### **1.3 DEFINITIONS**

- A. Schedule of Values: A statement furnished by Contractor allocating portions of the Contract Sum to various portions of the Work and used as the basis for reviewing Contractor's Applications for Payment.

#### **1.4 SCHEDULE OF VALUES**

- A. Coordination: Coordinate preparation of the Schedule of Values with preparation of Contractor's Construction Schedule.
  - 1. Correlate line items in the Schedule of Values with other required administrative forms and schedules, including the following:
    - a. Application for Payment forms with Continuation Sheets.
    - b. Submittals Schedule.
    - c. Contractor's Construction Schedule.
  - 2. Submit the Schedule of Values to Architect at earliest possible date but no later than seven days before the date scheduled for submittal of initial Applications for Payment.

- B. Format and Content: Use the Project Manual table of contents as a guide to establish line items for the Schedule of Values. Provide at least one line item for each Specification Section. For major trades with line item values exceeding \$25000, provide separate line items for identifiable units of work within such trade with a value not exceeding \$25000. Provide separate line items for labor and material.
1. Identification: Include the following Project identification on the Schedule of Values:
    - a. Project name and location.
    - b. Name of Architect.
    - c. Architect's project number.
    - d. Contractor's name and address.
    - e. Date of submittal.
  2. Submit draft of AIA Document G702 and AIA Document G703 Continuation Sheets.
  3. Arrange the Schedule of Values in tabular form with separate columns to indicate the following for each item listed:
    - a. Related Specification Section or Division.
    - b. Description of the Work.
    - c. Change Orders (numbers) that affect value.
    - d. Dollar value.
      - 1) Percentage of the Contract Sum to nearest one-hundredth percent, adjusted to total 100 percent.
  4. Provide a breakdown of the Contract Sum in enough detail to facilitate continued evaluation of Applications for Payment and progress reports. Coordinate with the Project Manual table of contents. Provide several line items for principal subcontract amounts, where appropriate. Include separate line items under required principal subcontracts for operation and maintenance manuals, punch list activities, Project Record Documents, and demonstration and training in the amount of 5 percent of the Contract Sum. Include the following mandatory line items:
    - a. Mobilization
    - b. Demobilization
    - c. Builders Risk Insurance
    - d. Bonds
    - e. Coordination Drawings
    - f. Scheduling
    - g. Construction Photographic Documentation
    - h. Field Engineering
    - i. Daily Building Cleanup
    - j. Daily Site Cleanup
    - k. Safety Program
    - l. Full-Time Project Manager
    - m. Full-Time Project Superintendent
    - n. Field Offices
    - o. DumpstersGeneral Contract O & P (not to be included in each line item).

5. Round amounts to nearest whole dollar; total shall equal the Contract Sum.
  6. Provide a separate line item in the Schedule of Values for each part of the Work where Applications for Payment may include materials or equipment purchased or fabricated and stored, but not yet installed.
    - a. Differentiate between items stored on-site and items stored off-site. If specified, include evidence of insurance or bonded warehousing.
  7. Provide separate line items in the Schedule of Values for initial cost of materials, for each subsequent stage of completion, and for total installed value of that part of the Work.
  8. Allowances: Provide a separate line item in the Schedule of Values for each allowance. Show line-item value of unit-cost allowances, as a product of the unit cost, multiplied by measured quantity. Use information indicated in the Contract Documents to determine quantities.
  9. Each item in the Schedule of Values and Applications for Payment shall be complete. Include total cost and proportionate share of general overhead and profit for each item.
    - a. Temporary facilities and other major cost items that are not direct cost of actual work-in-place may be shown either as separate line items in the Schedule of Values or distributed as general overhead expense, at Contractor's option.
  10. Schedule Updating: Update and resubmit the Schedule of Values monthly with the Application for Payment.
- C. Hourly Rates: Include with the Schedule of Values, a detailed breakdown of the total hourly cost for each journeyman, foreman, and apprentice of the Contractor and each Subcontractor, filed and non-filed.
1. Provide a detailed breakdown of wages, fringe benefits, payroll taxes, and insurance.
  2. Provide hourly cost for straight time, time and one-half, and double time. Hourly cost may not include overhead or profit.
  3. If the combined total of payroll taxes and insurance exceeds thirty percent of the wages, provide a notarized letter from the insurance agent or underwriter stating the percentage of payroll for each type of insurance for each construction trade classification. The cost of payroll taxes and insurance that are a function of payroll are allowed only on compensation that is paid in the form of wages and is not allowed on compensation that is paid in the form of fringe benefits.

#### 1.5 APPLICATIONS FOR PAYMENT

- A. Each Application for Payment shall be consistent with previous applications and payments as certified by Architect and paid for by Owner.
  1. Initial Application for Payment, Application for Payment at time of Substantial Completion, and final Application for Payment involve additional requirements.
- B. Payment Application Times: The date for each progress payment is indicated in the Agreement between Owner and Contractor. The period of construction Work covered by each Application for Payment is the period indicated in the Agreement.

1. In order to expedite monthly payment during the course of the Project, the Contractor shall review with the Architect a preliminary draft of each Application for Payment before final copies of the Application are formally submitted. The draft copy shall be typed and include the application date and application number. The draft copy shall include the total of each column and extension of each row on the Application as if this was the formal submission. The cover sheet shall include the Original Contract Sum and a summary of Changes to the Contract Sum, retainage, and payments to date as if this was the formal submission.
- C. Payment Application Forms: Use AIA Document G702 and AIA Document G703 Continuation Sheets as form for Applications for Payment.
- D. Application Preparation: Complete every entry on form. Notarize and execute by a person authorized to sign legal documents on behalf of Contractor. Architect will return incomplete applications without action.
  1. Entries shall match data on the Schedule of Values and Contractor's Construction Schedule. Use updated schedules if revisions were made.
  2. Include amounts of Change Orders issued before last day of construction period covered by application.
    - a. List each Change Order at the end of the Schedule of Values. Under each Change Order number, list each Change Order Proposal by number with a brief description of the Work and its value.
- E. Transmittal: Submit five signed and notarized original copies of each Application for Payment to Architect by a method ensuring receipt within 24 hours. One copy shall include waivers of lien and similar attachments if required.
  1. Transmit each copy with a transmittal form listing attachments and recording appropriate information about application.
- F. Waivers of Mechanic's Lien: With each Application for Payment, submit waivers of mechanic's liens from subcontractors, sub-subcontractors, and suppliers for construction period covered by the previous application.
  1. Submit partial waivers on each item for amount requested in previous application, after deduction for retainage, on each item.
  2. When an application shows completion of an item, submit final or full waivers.
  3. Owner reserves the right to designate which entities involved in the Work must submit waivers.
  4. Submit final Application for Payment with or preceded by final waivers from every entity involved with performance of the Work covered by the application who is lawfully entitled to a lien.
  5. Waiver Forms: Submit waivers of lien on forms, executed in a manner acceptable to Owner.
- G. Initial Application for Payment: Administrative actions and submittals that must precede or coincide with submittal of first Application for Payment include the following:



1. List of subcontractors.
  2. Schedule of Values.
  3. Contractor's Construction Schedule (preliminary if not final).
  4. Products list.
  5. Schedule of unit prices.
  6. Submittals Schedule (preliminary if not final).
  7. List of Contractor's staff assignments.
  8. List of Contractor's principal consultants.
  9. Copies of building permits.
  10. Copies of authorizations and licenses from authorities having jurisdiction for performance of the Work.
  11. Initial progress report.
  12. Report of preconstruction conference.
  13. Certificates of insurance and insurance policies.
  14. Performance and payment bonds.
  15. Data needed to acquire Owner's insurance.
- H. Application for Payment at Substantial Completion: After issuing the Certificate of Substantial Completion, submit an Application for Payment showing 100 percent completion for portion of the Work claimed as substantially complete.
1. Include documentation supporting claim that the Work is substantially complete and a statement showing an accounting of changes to the Contract Sum.
  2. This application shall reflect Certificates of Partial Substantial Completion issued previously for Owner occupancy of designated portions of the Work.
- I. Final Payment Application: Submit final Application for Payment with releases and supporting documentation not previously submitted and accepted, including, but not limited, to the following:
1. Evidence of completion of Project closeout requirements.
  2. Insurance certificates for products and completed operations where required and proof that taxes, fees, and similar obligations were paid.
  3. Updated final statement, accounting for final changes to the Contract Sum.
  4. AIA Document G706, "Contractor's Affidavit of Payment of Debts and Claims."
  5. AIA Document G706A, "Contractor's Affidavit of Release of Liens."
  6. AIA Document G707, "Consent of Surety to Final Payment."
  7. Evidence that claims have been settled.
  8. Final meter readings for utilities, a measured record of stored fuel, and similar data as of date of Substantial Completion or when Owner took possession of and assumed responsibility for corresponding elements of the Work.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 01 29 00

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

## SECTION 01 31 00 - PROJECT MANAGEMENT AND COORDINATION

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### 1.2 SUMMARY

- A. This Section includes administrative provisions for coordinating construction operations on Project including, but not limited to, the following:
  - 1. Administrative and supervisory personnel.
  - 2. Project meetings.
- B. The Contractor shall participate in coordination requirements.
- C. Related Sections include the following:
  - 1. Division 01 Section "Execution" for procedures for coordinating general installation.
  - 2. Division 01 Section "Closeout Procedures" for coordinating Contract closeout.

#### 1.3 COORDINATION

- A. Coordination: Coordinate construction operations included in different Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations, included in different Sections that depend on each other for proper installation, connection, and operation.
  - 1. Schedule construction operations in sequence required to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
  - 2. Coordinate installation of different components with subcontractors to ensure maximum accessibility for required maintenance, service, and repair.
  - 3. Make adequate provisions to accommodate items scheduled for later installation.
  - 4. Where availability of space is limited, coordinate installation of different components to ensure maximum performance and accessibility for required maintenance, service, and repair of all components, including mechanical and electrical.
  - 5. No claim for extra compensation of extension of Contract time will be allowed for conditions resulting from a lack of said coordination.
- B. Prepare memoranda outlining special procedures required for coordination. Include such items as required notices, reports, and list of attendees at meetings.

1. Prepare similar memoranda for Owner and separate contractors if coordination of their Work is required.
- C. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities and activities of subcontractors to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:
1. Preparation of Contractor's Construction Schedule.
  2. Preparation of the Schedule of Values.
  3. Installation and removal of temporary facilities and controls.
  4. Delivery and processing of submittals.
  5. Progress meetings.
  6. Preinstallation conferences.
  7. Project closeout activities.
  8. Startup and adjustment of systems.
  9. Project closeout activities.
- D. Conservation: Coordinate construction activities to ensure that operations are carried out with consideration given to conservation of energy, water, and materials.
1. Salvage materials and equipment involved in performance of, but not actually incorporated into, the Work. Refer to other Sections for disposition of salvaged materials that are designated as Owner's property.

#### 1.4 ADMINISTRATIVE AND SUPERVISORY PERSONNEL

- A. General: In addition to Project superintendent, provide other administrative and supervisory personnel as required for proper performance of the Work.
- B. Key Personnel Names: Within 7 days of starting construction operations, submit a list of key personnel assignments, including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list addresses and telephone numbers, including home and office telephone numbers. Provide names, addresses, and telephone numbers of individuals assigned as standbys in the absence of individuals assigned to Project.

#### 1.5 PROJECT MEETINGS

- A. General: Schedule and conduct meetings and conferences at Project site, unless otherwise indicated.
  1. Attendees: Inform participants and others involved, and individuals whose presence is required, of date and time of each meeting.
  2. Agenda: Prepare the meeting agenda, and distribute the agenda to all invited attendees.
  3. Minutes: Record significant discussions and agreements achieved and distribute the meeting minutes to everyone concerned, including the Owner and Owner's Representative, within 3 days of the meeting.

- B. Preconstruction Conference: Schedule a preconstruction conference before starting construction, at a time convenient to Owner, Owner's Representative, and Architect, but no later than 15 days after execution of the Agreement. Hold the conference at Project site or another convenient location. Conduct the meeting to review responsibilities and personnel assignments.
1. Attendees: Authorized representatives of Owner, Architect; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the conference. All participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
  2. Agenda: Discuss items of significance that could affect progress, including the following:
    - a. Tentative construction schedule.
    - b. Critical work sequencing and long-lead items.
    - c. Designation of key personnel and their duties.
    - d. Procedures for processing field decisions and Change Orders.
    - e. Procedures for requests for information (RFIs).
    - f. Procedures for testing and inspecting.
    - g. Procedures for processing Applications for Payment.
    - h. Distribution of the Contract Documents.
    - i. Submittal procedures.
    - j. Preparation of Record Documents.
    - k. Use of the premises.
    - l. Work restrictions.
    - m. Owner's occupancy requirements.
    - n. Responsibility for temporary facilities and controls.
    - o. Parking availability.
    - p. Office, work, and storage areas.
    - q. Equipment deliveries and priorities.
    - r. First aid.
    - s. Security.
    - t. Progress cleaning.
    - u. Working hours.
  3. Minutes: The Architect will record and distribute meeting minutes.
- C. Preinstallation Conferences: Conduct a preinstallation conference at Project site before each construction activity that requires coordination with other construction.
1. Attendees: Installer and representatives of manufacturers and fabricators involved in or affected by the installation and its coordination or integration with other materials and installations that have preceded or will follow, shall attend the meeting. Advise Architect of scheduled meeting dates.
  2. Agenda: Review progress of other construction activities and preparations for the particular activity under consideration, including requirements for the following:
    - a. The Contract Documents.
    - b. Options.
    - c. Related requests for information (RFIs).

- d. Related Change Orders.
  - e. Purchases.
  - f. Deliveries.
  - g. Submittals.
  - h. Review of mockups.
  - i. Possible conflicts.
  - j. Compatibility problems.
  - k. Time schedules.
  - l. Weather limitations.
  - m. Manufacturer's written recommendations.
  - n. Warranty requirements.
  - o. Compatibility of materials.
  - p. Acceptability of substrates.
  - q. Temporary facilities and controls.
  - r. Space and access limitations.
  - s. Regulations of authorities having jurisdiction.
  - t. Testing and inspecting requirements.
  - u. Installation procedures.
  - v. Coordination with other work.
  - w. Required performance results.
  - x. Protection of adjacent work.
  - y. Protection of construction and personnel.
3. Record significant conference discussions, agreements, and disagreements, including required corrective measures and actions.
  4. Reporting: The Contractor shall distribute minutes of the meeting to everyone concerned, including the Owner, Owner's Representative, and Architect within 3 days of the meeting.
  5. Do not proceed with installation if the conference cannot be successfully concluded. Initiate whatever actions are necessary to resolve impediments to performance of the Work and reconvene the conference at earliest feasible date.
- D. Progress Meetings: Schedule progress meetings at regular intervals. Coordinate dates of meetings with preparation of payment requests.
1. Attendees: In addition to representatives of Owner and Architect, each contractor concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
  2. Agenda: Review and correct or approve minutes of previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.
    - a. Construction Schedule: Review progress since the last meeting. Determine whether each activity is on time, ahead of schedule, or behind schedule, in relation to Contractor's Construction Schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.

- 1) Review schedule for next period.
  - b. Review present and future needs of each entity present, including the following:
    - 1) Interface requirements.
    - 2) Sequence of operations.
    - 3) Status of submittals.
    - 4) Deliveries.
    - 5) Off-site fabrication.
    - 6) Access.
    - 7) Site utilization.
    - 8) Temporary facilities and controls.
    - 9) Work hours.
    - 10) Hazards and risks.
    - 11) Progress cleaning.
    - 12) Quality and work standards.
    - 13) Status of correction of deficient items.
    - 14) Field observations.
    - 15) Requests for information (RFIs).
    - 16) Status of proposal requests.
    - 17) Pending changes.
    - 18) Status of Change Orders.
    - 19) Pending claims and disputes.
    - 20) Documentation of information for payment requests.
  3. Minutes: The Architect will record and distribute the meeting minutes.
- E. Coordination Meetings: Schedule Project coordination meetings at regular intervals. Project coordination meetings are in addition to specific meetings held for other purposes, such as progress meetings and preinstallation conferences.
1. Attendees: In addition to representatives of the Contractor, each subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
  2. Agenda: Review and correct or approve minutes of the previous coordination meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.
    - a. Contractor's Construction Schedule: Review progress since the last coordination meeting. Determine whether each contract is on time, ahead of schedule, or behind schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.
    - b. Schedule Updating: Revise Contractor's Construction Schedule after each coordination meeting where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with report of each meeting.

- c. Review present and future needs of each contractor present, including the following:
  - 1) Interface requirements.
  - 2) Sequence of operations.
  - 3) Status of submittals.
  - 4) Deliveries.
  - 5) Off-site fabrication.
  - 6) Access.
  - 7) Site utilization.
  - 8) Temporary facilities and controls.
  - 9) Work hours.
  - 10) Hazards and risks.
  - 11) Progress cleaning.
  - 12) Quality and work standards.
  - 13) Change Orders.
3. Reporting: The Contractor shall record meeting results and distribute copies to everyone in attendance and to others affected by decisions or actions resulting from each meeting.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 01 31 00



**CAD FILES AGREEMENT**

Date

(address)

Dear (Contractor's Name):

At your request, Kaestle Boos Associates, Inc. ("KBA") will provide electronic files for your convenience and use in the preparation of shop drawings related to the new construction of the **Parking Lot Expansion and Related Site Improvements- Naugatuck High School, Naugatuck, CT** subject to the following terms and conditions:

KBA's electronic files are compatible with Autocad Autodesk Architectural Desktop 2012. KBA makes no representation as to the compatibility of these files with your hardware or your software beyond the specified release of the referenced specifications.

Data contained on these electronic files is part of KBA's instruments of service and shall not be used by you or anyone else receiving this data through or from you for any purpose other than as a convenience in the preparation of shop drawings for the referenced project; however, they are not to be used in place of Contractor's shop drawings. Any other use or reuse by you or by others, will be at your sole risk and without liability or legal exposure to KBA. You agree to make no claim and hereby waive, to the fullest extent permitted by law, any claim or cause of action of any nature against KBA, its officers, directors, employees, agents or subconsultants which may arise out of or in connection with your use of the electronic files.

Furthermore, you shall, to the fullest extent permitted by law, indemnify and hold harmless KBA from all claims, damages, losses and expenses, including attorney's fees arising out of or resulting from your use of these electronic files.

These electronic files are not contract documents. Significant differences may exist between these electronic files and corresponding hard copy contract documents due to addenda, change orders or other revisions. KBA makes no representation regarding the accuracy or completeness of the electronic files you receive. In the event that a conflict arises between the signed contract documents prepared by KBA and electronic files, the signed contract documents shall govern. You are responsible for determining if any conflict exists. By your use of these electronic files, you are not relieved of your duty to fully comply with the contract documents, including and without limitation, the need to check, confirm and coordinate all dimensions and details, take field measurements, verify field conditions and coordinate your work with that of other contractors for the project.

Because of the potential that the information presented on the electronic files can be modified, unintentionally or otherwise, KBA reserves the right to remove all indicia of its ownership and/or involvement from each electronic display.

KBA will furnish you electronic files of the following drawing sheets:  
(Insert list of drawings)

Under no circumstances shall delivery of the electronic files for use by you be deemed a sale by KBA and KBA makes no warranties, either express or implied, of merchantability or fitness for any particular purpose. In no event shall KBA be liable for any loss of profit or any consequential damages.

\_\_\_\_\_  
**CONTRACTOR COMPANY**

\_\_\_\_\_  
**CONTRACTOR NAME (SIGN)**

\_\_\_\_\_  
**CONTRACTOR NAME (PRINT)**

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

## SECTION 01 32 00 - CONSTRUCTION PROGRESS DOCUMENTATION

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### 1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for documenting the progress of construction during performance of the Work, including the following:
1. Preliminary Construction Schedule.
  2. Contractor's Construction Schedule.
  3. Submittals Schedule.
  4. Daily construction reports.
  5. Material location reports.
  6. Field condition reports.
  7. Special reports.
  8. Certified payroll records.
- B. Related Sections include the following:
1. Division 01 Section "Payment Procedures" for submitting the Schedule of Values.
  2. Division 01 Section "Project Management and Coordination" for submitting and distributing meeting and conference minutes.
  3. Division 01 Section "Submittal Procedures" for submitting schedules and reports.
  4. Division 01 Section "Quality Requirements" for submitting a schedule of tests and inspections.

#### 1.3 DEFINITIONS

- A. Activity: A discrete part of a project that can be identified for planning, scheduling, monitoring, and controlling the construction project. Activities included in a construction schedule consume time and resources.
1. Critical activities are activities on the critical path. They must start and finish on the planned early start and finish times.
  2. Predecessor Activity: An activity that precedes another activity in the network.
  3. Successor Activity: An activity that follows another activity in the network.
- B. Cost Loading: The allocation of the Schedule of Values for the completion of an activity as scheduled. The sum of costs for all activities must equal the total Contract Sum, unless otherwise approved by Architect.

- C. CPM: Critical path method, which is a method of planning and scheduling a construction project where activities are arranged based on activity relationships. Network calculations determine when activities can be performed and the critical path of Project.
- D. Critical Path: The longest connected chain of interdependent activities through the network schedule that establishes the minimum overall Project duration and contains no float.
- E. Event: The starting or ending point of an activity.
- F. Float: The measure of leeway in starting and completing an activity.
  - 1. Float time belongs to Owner.
  - 2. Free float is the amount of time an activity can be delayed without adversely affecting the early start of the successor activity.
  - 3. Total float is the measure of leeway in starting or completing an activity without adversely affecting the planned Project completion date.
- G. Fagnnet: A partial or fragmentary network that breaks down activities into smaller activities for greater detail.
- H. Major Area: A story of construction, a separate building, or a similar significant construction element.
- I. Milestone: A key or critical point in time for reference or measurement.
- J. Network Diagram: A graphic diagram of a network schedule, showing activities and activity relationships.
- K. Resource Loading: The allocation of manpower and equipment necessary for the completion of an activity as scheduled.

#### 1.4 SUBMITTALS

- A. Submittals Schedule: Submit three copies of schedule within 15 days of Notice to Proceed, prior to commencement of work other than preparation of temporary facilities. Arrange the following information in a tabular format:
  - 1. Scheduled date for first submittal.
  - 2. Specification Section number and title.
  - 3. Submittal category (action or informational).
  - 4. Name of subcontractor.
  - 5. Description of the Work covered.
  - 6. Scheduled date for Architect's final release or approval.
- B. Preliminary Network Diagram: Submit two opaque copies, large enough to show entire network for entire construction period. Show logic ties for activities.
  - 1. Include project calendar.

- C. Contractor's Construction Schedule: Submit two opaque copies of initial schedule, large enough to show entire schedule for entire construction period.
  - 1. Submit an electronic copy of schedule, using software indicated, on CD-R, and labeled to comply with requirements for submittals. Include type of schedule (Initial or Updated) and date on label.
- D. CPM Reports: Concurrent with CPM schedule, submit three copies of each of the following computer-generated reports. Format for each activity in reports shall contain activity number, activity description, cost and resource loading, original duration, remaining duration, early start date, early finish date, late start date, late finish date, and total float in calendar days.
  - 1. Activity Report: List of all activities sorted by activity number and then early start date, or actual start date if known.
  - 2. Logic Report: List of preceding and succeeding activities for all activities, sorted in ascending order by activity number and then early start date, or actual start date if known.
  - 3. Total Float Report: List of all activities sorted in ascending order of total float.
  - 4. Earnings Report: Compilation of Contractor's total earnings from the Notice to Proceed until most recent Application for Payment.
- E. Daily Construction Reports: Submit three copies at weekly intervals, to the Architect.
- F. Material Location Reports: Submit three copies at monthly intervals, to the Architect.
- G. Field Condition Reports: Submit three copies at time of discovery of differing conditions, to the Architect.
- H. Special Reports: Submit three copies at time of unusual event to the Architect.
- I. Certified Payroll Records: Submit two copies at weekly intervals to the Owner's Representative.

#### 1.5 QUALITY ASSURANCE

- A. Prescheduling Conference: Within 10 days following Notice to Proceed, conduct conference with Owner's Representative at Project site to comply with requirements in Division 01 Section "Project Management and Coordination." Review methods and procedures related to the Preliminary Construction Schedule and Contractor's Construction Schedule, including, but not limited to, the following:
  - 1. Review software limitations and content and format for reports.
    - a. Provide example of CPM schedule format.
  - 2. Verify availability of qualified personnel needed to develop and update schedule.
  - 3. Discuss constraints, including phasing, work stages, area separations, interim milestones and partial Owner occupancy.
  - 4. Review delivery dates for Owner-furnished products.
  - 5. Review schedule for work of Owner's separate contracts.
  - 6. Review time required for review of submittals and resubmittals.

7. Review requirements for tests and inspections by independent testing and inspecting agencies.
8. Review time required for completion and startup procedures.
9. Review and finalize list of construction activities to be included in schedule.
10. Review submittal requirements and procedures.
11. Review procedures for updating schedule.
12. Establish mandatory milestone dates and finish dates within each phase.

- B. Approval of Contractor's Construction Schedule and network is advisory only and does not relieve the Contractor of the responsibility for completing the work within the Contract Time. Approval by the Owner's Representative is not an endorsement of the success of the construction schedule, nor shall it make the Owner's Representative liable for time or cost overruns as a result of potential shortcomings.

## 1.6 COORDINATION

- A. Coordinate preparation and processing of schedules and reports with performance of construction activities and with scheduling and reporting of separate contractors.
1. In the case of interference between the operations of separate Contractors, Owner, through Owner's Representative, will determine the work priority of each Contractor and the sequence of work necessary to expedite completion of Project.
- B. Coordinate Contractor's Construction Schedule with the Schedule of Values, list of subcontracts, Submittals Schedule, progress reports, payment requests, and other required schedules and reports.
1. Secure time commitments for performing critical elements of the Work from all filed sub-bidders and subcontractors.
  2. Coordinate each construction activity in the network with other activities and schedule them in proper sequence.
- C. Calendar: Compile a project calendar for use in scheduling. Incorporate all limitations on working days and working hours, including the following:
1. Legal Holidays.
  2. Non-working day and periods designated by the Owner for special activities.
  3. Other non-working days determined by the Contractor.
  4. Optional working days determined by the Contractor.

## PART 2 - PRODUCTS

### 2.1 SUBMITTALS SCHEDULE

- A. Preparation: Submit a schedule of submittals, arranged in chronological order by dates required by construction schedule. Include time required for review, resubmittal, ordering, manufacturing, fabrication, and delivery when establishing dates.

1. Coordinate Submittals Schedule with list of subcontracts, the Schedule of Values, and Contractor's Construction Schedule.
2. Initial Submittal: Submit concurrently with preliminary network diagram. Include submittals required during the first 60 days of construction. List those required to maintain orderly progress of the Work and those required early because of long lead time for manufacture or fabrication.
3. Final Submittal: Submit concurrently with the first complete submittal of Contractor's Construction Schedule.
4. Update the submittals schedule periodically as the work progresses. Submit concurrently with each Application for payment.
5. Utilize a computerized program such as Primavera Expedition or Prolog for tracking submittals. Submit the following reports bi-weekly:
  - a. Complete list of reviewed submittals.
  - b. Listing of submittals to date.
  - c. Listing of approved submittals.
  - d. Listing of rejected submittals.
  - e. Listing of submittals returned for correction.
  - f. List of outstanding submittals.
6. At the request of the Architect or Owner's Representative provide reports capable of being sorted by the following criteria:
  - a. Approved status.
  - b. Subcontractor/Supplier.
  - c. Submission date.
  - d. Number of days late for return.
  - e. Number of days under review.

## 2.2 CONTRACTOR'S CONSTRUCTION SCHEDULE, GENERAL

- A. Procedures: Comply with procedures contained in AGC's "Construction Planning & Scheduling."
- B. Time Frame: Extend schedule from date established for commencement of the Work to date of Substantial Completion.
  1. Contract completion date shall not be changed by submission of a schedule that shows an early completion date, unless specifically authorized by Change Order.
- C. Activities: Treat each phase or separate area as a separate numbered activity for each principal element of the Work. Comply with the following:
  1. Activity Duration: Define activities so no activity is longer than 10 days, unless specifically allowed by Architect.
  2. Procurement Activities: Include procurement process activities for the long lead items and major items, requiring a cycle of more than 60 days, as separate activities in schedule. Procurement cycle activities include, but are not limited to, submittals,

- approvals, purchasing, fabrication, and delivery. Procurement activity duration may exceed 10 days, subject to review by Owner's Representative.
3. Submittal Review Time: Include review and resubmittal times indicated in Division 01 Section "Submittal Procedures" in schedule. Coordinate submittal review times in Contractor's Construction Schedule with Submittals Schedule.
  4. Startup and Testing Time: Include not less than 1 day for startup and testing.
  5. Substantial Completion: Indicate completion in advance of date established for Substantial Completion, and allow time for Architect's administrative procedures necessary for certification of Substantial Completion.
- D. Constraints: Include constraints and work restrictions indicated in the Contract Documents and as follows in schedule, and show how the sequence of the Work is affected.
1. Work Restrictions: Show the effect of the following items on the schedule:
    - a. Coordination with existing construction.
    - b. Limitations of continued occupancies.
    - c. Uninterruptible services.
    - d. Partial occupancy before Substantial Completion.
    - e. Use of premises restrictions.
    - f. Provisions for future construction.
    - g. Seasonal variations.
    - h. Environmental control.
  2. Work Stages: Indicate important stages of construction for each major portion of the Work, including, but not limited to, the following:
    - a. Subcontract awards.
    - b. Submittals.
    - c. Purchases.
    - d. Mockups.
    - e. Fabrication.
    - f. Sample testing.
    - g. Deliveries.
    - h. Installation.
    - i. Tests and inspections.
    - j. Adjusting.
    - k. Curing.
    - l. Startup and placement into final use and operation.
- E. Milestones: Include milestones indicated in the Contract Documents in schedule, including, but not limited to, the Notice to Proceed, Substantial Completion, and Final Completion.
- F. Cost Correlation: At the head of schedule, provide a cost correlation line, indicating planned and actual costs. On the line, show dollar volume of the Work performed as of dates used for preparation of payment requests.
1. Refer to Division 01 Section "Payment Procedures" for cost reporting and payment procedures.



2. Contractor shall assign cost to construction activities on the CPM schedule. Costs shall not be assigned to submittal activities unless specified otherwise but may, with Architect's approval, be assigned to fabrication and delivery activities. Costs shall be under required principal subcontracts for testing and commissioning activities, operation and maintenance manuals, punch list activities, Project Record Documents, and demonstration and training (if applicable), in the amount of 5 percent of the Contract Sum.
  3. Each activity cost shall reflect an accurate value subject to approval by Architect.
  4. Total cost assigned to activities shall equal the total Contract Sum.
- G. Contract Modifications: For each proposed contract modification and concurrent with its submission, prepare a time-impact analysis using fragnets to demonstrate the effect of the proposed change on the overall project schedule.
- H. Computer Software: Prepare schedules using a program that has been developed specifically to manage construction schedules.
1. Utilize current versions of Primavera or Prolog programs compatible with Owner's Representative's scheduling program for Windows based software. Scheduling capabilities to include the following:
    - a. Unique activity identification number permanently associated with each activity.
    - b. Ability to track critical path through subprojects and overall schedule.
    - c. Predecessor and successor reporting.
    - d. Information content associated with each activity.
    - e. Views of network, cost loading, resource allocation and leveling.
    - f. Float analysis and handling.
    - g. Cost tracking.
    - h. Progress reporting and revisions.
    - i. Reporting content.
    - j. Flexibility and formatting.
    - k. Electronic data export.

### 2.3 CONTRACTOR'S CONSTRUCTION SCHEDULE (CPM SCHEDULE)

- A. General: Prepare network diagrams using AON (activity-on-node) format.
- B. Preliminary Network Diagram: Submit diagram within 14 days of date established for commencement of the Work. Outline significant construction activities for the first 60 days of construction. Include skeleton diagram for the remainder of the Work. Schedule each activity in the proper sequence.
- C. CPM Schedule: Prepare Contractor's Construction Schedule using a computerized, time-scaled CPM network analysis diagram for the Work.
  1. Develop network diagram in sufficient time to submit CPM schedule so it can be accepted for use no later than 60 days after date established for commencement of the Work.

- a. Failure to include any work item required for performance of this Contract shall not excuse Contractor from completing all work within applicable completion dates, regardless of Architect's approval of the schedule or review of the schedule by the Owner's Representative.
  2. Conduct educational workshops to train and inform key Project personnel, including subcontractors' personnel, in proper methods of providing data and using CPM schedule information.
  3. Establish procedures for monitoring and updating CPM schedule and for reporting progress. Coordinate procedures with progress meeting and payment request dates.
  4. Use "one workday" as the unit of time. Include list of nonworking days and holidays incorporated into the schedule.
- D. CPM Schedule Preparation: Prepare a list of all activities required to complete the Work. Using the preliminary network diagram, prepare a skeleton network to identify probable critical paths.
1. Activities: Indicate the estimated time duration, sequence requirements, and relationship of each activity in relation to other activities. Include estimated time frames for the following activities:
    - a. Preparation and processing of submittals.
    - b. Mobilization and demobilization.
    - c. Purchase of materials.
    - d. Delivery.
    - e. Fabrication.
    - f. Utility interruptions.
    - g. Installation.
    - h. Work by Owner that may affect or be affected by Contractor's activities.
    - i. Testing and commissioning.
  2. Critical Path Activities: Identify critical path activities, including those for interim completion dates. Scheduled start and completion dates shall be consistent with Contract milestone dates.
    - a. Except where earlier completion dates are specified, CPM schedules which show completion of the Work prior to the Contract completion date may be approved by the Owner's Representative, but will not be allowed as a basis of a claim for delay against the Owner.
  3. Processing: Process data to produce output data on a computer-drawn, time-scaled network. Revise data, reorganize activity sequences, and reproduce as often as necessary to produce the CPM schedule within the limitations of the Contract Time.
  4. Format: Mark the critical path. Locate the critical path near center of network; locate paths with most float near the edges.
    - a. Subnetworks on separate sheets are permissible for activities clearly off the critical path.
  5. Indicate the following items on the note representing each activity on the network.

- a. Duration and remaining duration for those activities in progress.
  - b. A four character (or less) code indicative of party responsible for activity.
  - c. A brief description of activity.
  - d. A four character (or less) code.
  - e. A four character (or less) code indicating the Phase area. (Area code).
  - f. A four character (or less) code indicating the type of activity (type code), including but not limited to the following:
    - 1) Submittal
    - 2) Construction
    - 3) Testing
    - 4) Fabrication
- E. Initial Issue of Schedule: Prepare initial network diagram from a list of straight "early start-total float" sort. Identify critical activities. Prepare tabulated reports showing the following:
1. Activity numbers, responsibility codes, Phase codes, Area Codes and Type Codes.
  2. Description of activity.
  3. Principal events of activity.
  4. Immediate preceding and succeeding activities.
  5. Early and late start dates.
  6. Early and late finish dates.
  7. Activity duration in workdays.
  8. Total float or free float.
  9. Average size of workforce.
  10. Dollar value of activity (coordinated with the Schedule of Values).
- F. Schedule Updating: Concurrent with making revisions to schedule, prepare tabulated reports showing the following:
1. Identification of activities that have changed.
  2. Changes in early and late start dates.
  3. Changes in early and late finish dates.
  4. Changes in activity durations in workdays.
  5. Changes in the critical path.
  6. Changes in total float or free float.
  7. Changes in the Contract Time.
- G. Value Summaries: Prepare two cumulative value lists, sorted by finish dates.
1. In first list, tabulate activity number, early finish date, dollar value, and cumulative dollar value.
  2. In second list, tabulate activity number, late finish date, dollar value, and cumulative dollar value.
  3. In subsequent issues of both lists, substitute actual finish dates for activities completed as of list date.
  4. Prepare list for ease of comparison with payment requests; coordinate timing with progress meetings.

- a. In both value summary lists, tabulate "actual percent complete" and "cumulative value completed" with total at bottom.
- b. Submit value summary printouts one week before each regularly scheduled progress meeting.

## 2.4 REPORTS

- A. Daily Construction Reports: Prepare a daily construction report recording the following information concerning events at Project site:
  1. List of subcontractors at Project site.
  2. Approximate count of personnel at Project site.
  3. Equipment at Project site.
  4. Material deliveries.
  5. High and low temperatures and general weather conditions.
  6. Accidents.
  7. Meetings and significant decisions.
  8. Unusual events (refer to special reports).
  9. Stoppages, delays, shortages, and losses.
  10. Meter readings and similar recordings.
  11. Emergency procedures.
  12. Orders and requests of authorities having jurisdiction.
  13. Change Orders received and implemented.
  14. Construction Change Directives received and implemented.
  15. Services connected and disconnected.
  16. Equipment or system tests and startups.
  17. Partial Completions and occupancies.
  18. Substantial Completions authorized.
- B. Material Location Reports: At monthly intervals, prepare and submit a comprehensive list of materials delivered to and stored at Project site. List shall be cumulative, showing materials previously reported plus items recently delivered. Include with list a statement of progress on and delivery dates for materials or items of equipment fabricated or stored away from Project site.
- C. Field Condition Reports: Immediately on discovery of a difference between field conditions and the Contract Documents, prepare and submit a detailed report. Submit with a request for interpretation. Include a detailed description of the differing conditions, together with any recommendations to resolve the differing conditions.
- D. Deficiency Report: Prepare a detailed deficiency report weekly. The status of the correction of deficient items will be discussed at every progress meeting. The report shall be in "Excel" or similar spreadsheet format. The report shall include the following information:
  1. Date that the deficiency was identified.
  2. Specific instrument by which the deficiency was identified such as Field Report, Field Notes, Job Meeting.
  3. Date by which a remedial plan of action is anticipated to be submitted.
  4. Date by which remedial plan of action was submitted.

5. Date by which remedial work is anticipated to be started.
6. Date by which remedial work was started.
7. Date by which remedial work is anticipated to be completed.
8. Date by which remedial work was completed.
9. Date that person authorized by the Owner to inspect the remedial work accepted the work.
10. Name of person authorized by the Owner that inspected and accepted the remedial work.

## 2.5 SPECIAL REPORTS

- A. General: Submit special reports directly to Owner within one day of an occurrence. Distribute copies of report to parties affected by the occurrence.
- B. Reporting Unusual Events: When an event of an unusual and significant nature occurs at Project site, whether or not related directly to the Work, prepare and submit a special report. List chain of events, persons participating, response by Contractor's personnel, evaluation of results or effects, and similar pertinent information. Advise Owner in advance when these events are known or predictable.

## 2.6 CERTIFIED PAYROLL RECORDS

- A. The General Contractor and each Subcontractor is required to submit a certified payroll with a statement of compliance on a weekly basis.
- B. The Owner has the authority to verify payroll reports by checking employees' pay stubs and personal identification.
- C. The Owner may withhold a portion of the Application for Payment if payroll reports have not been submitted for a portion of the Work.

## PART 3 - EXECUTION

### 3.1 CONTRACTOR'S CONSTRUCTION SCHEDULE

- A. Scheduling Consultant: Engage a consultant to provide planning, evaluation, and reporting using CPM scheduling.
  1. In-House Option: Owner may waive the requirement to retain a consultant if Contractor employs skilled personnel with experience in CPM scheduling and reporting techniques. Submit qualifications.
  2. Meetings: Scheduling consultant shall attend all meetings related to Project progress, alleged delays, and time impact.
- B. Contractor's Construction Schedule Updating: At monthly intervals, update schedule to reflect actual construction progress and activities. Issue schedule one week before submission of Application for Payment.

1. Revise schedule immediately after each meeting or other activity where revisions have been recognized or made. Issue updated schedule concurrently with the report of each such meeting.
  2. Include a report with updated schedule that indicates every change, including, but not limited to, changes in logic, durations, actual starts and finishes, and activity durations.
  3. As the Work progresses, indicate Actual Completion percentage for each activity.
  4. Update schedule weekly during period of time between June 1 and September 15, or as determined by Owner's Representative.
  5. Evaluate progress of the work jointly with the Owner's Representative at the end of each week to show progress and identify conflicts.
- C. Distribution: Distribute two copies each of approved schedule to Architect, Owner's Representative, Owner, separate contractors, testing and inspecting agencies, and other parties identified by Contractor with a need-to-know schedule responsibility.
1. Post copies in Project meeting rooms and temporary field offices.
  2. When revisions are made, distribute updated schedules to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in performance of construction activities.

### 3.2 SCHEDULE COMPLIANCE

- A. Whenever it becomes apparent from the current CPM schedule that delays to the critical path have resulted and Contract completion date will not be met, or when so directed by the Owner's Representative, take some or all of the following actions at no additional cost to the Owner:
1. Submit to the Owner's Representative, a written recovery statement of proposed methods to remove or arrest delay to critical path in approved schedule, and a proposed schedule with the corresponding revisions in activities and logic ties.
  2. Increase construction manpower as necessary to substantially eliminate backlog of work.
  3. Increase the number of working hours per shift, shifts per day, working days per week, amount of construction equipment, or any combination therefore, sufficiently to substantially eliminate backlog of work.
  4. Reschedule activities to achieve maximum practical concurrency of accomplishment of activities, and comply with revised schedule.
- B. If Contractor fails to submit a written statement of proposed methods or fails to take such steps as requested and approved by the Owner's Representative, the Owner may direct the Contractor to increase the level of effort in manpower (trades), equipment and work schedule including overtime, weekend and holiday work, to be employed by Contractor in order to remove or arrest delay to the critical path in approved schedule.
1. The Contractor shall promptly provide such level of effort at no additional cost to the Owner.
- C. Contractor's failure, refusal or neglect to promptly comply with these schedule recovery requirements shall be reasonable evidence that Contractor is not prosecuting the Work with due diligence. Any such failure, refusal or neglect shall give sufficient basis to the Owner to elect any of the following:

1. Demand adequate written assurance of due performance, as provided in the General Conditions;
2. Withhold liquidated damages, and;
3. At the Owner's sole discretion, direct alternate schedule recovery actions.

### 3.3 ADJUSTMENT OF CONTRACT SCHEDULE AND COMPLETION TIME

- A. If Contractor desires to make changes in its method of operating which affect the approved CPM schedule, notify the Owner's Representative in writing, stating the nature of and reason for the proposed changes. Revise and resubmit the CPM schedule only after proposed changes are approved by the Owner's Representative. Adjustment may consist of changing portions of the activity sequence, activity durations, division of approved activities, or other adjustments as may be approved by the Owner's Representative.
  1. Addition of extraneous, nonworking activities, or activities which add unapproved constraints to the CPM schedule will not be approved.
  2. Make all revisions to the CPM schedule without any additional cost to the Owner.
- B. If completion of any activity, whether or not critical, falls more than 100 percent behind its approved duration, submit a schedule adjustment to the Owner's Representative for approval, showing each activity divided into two activities reflecting completed and uncompleted work.
- C. Immediately reschedule with added activities shown on the schedule, which are not approved on the first submittal or within schedule time, and equipment which does not pass specified tests.
- D. Submit requests for any extension of Contract completion date to Owner's Representative for approval, including such justification and supporting evidence as Owner's Representative may deem necessary to determine whether Contractor is entitled to an extension of time under provisions of this Contract. The Owner's Representative will, after receipt of such justification and supporting evidence, make findings of fact and will advise the Contractor in writing thereof.
  1. The total number of days of extension to which the Contractor is entitled, if any, will be determined by the Owner's Representative, based upon the currently approved CPM schedule and on all data relevant to extension.
  2. Actual delays in activities which, according to the CPM schedule, do not affect any Contract completion date shown by critical path in the network will not constitute basis for a change therein.
- E. Subject to the provisions of the General Conditions of the Contract and other Division 01 Sections, submit each request for change in Contract completion date to the Owner's Representative within 20 calendar days after beginning of delay for which a time extension is requested but before date of final payment under this Contract. No extension will be granted for requests which are not submitted within the aftermentioned time limit.
  1. In the case of Contractor claims for delays in the work due to causes beyond the Contractor's control, demonstrate by recalculating the progress schedule to indicate the actual effect on related activities. Only interferences with specific work activities that, through correct network analysis, result in a net increase in the critical path will be allowed. Extension of time shall be determined through analysis of the progress schedule.

2. From time to time it may be necessary for the project schedule or completion time to be adjusted, as directed by the Owner, to reflect affects of job conditions, weather, technical difficulties, strikes, unavoidable delays on part of the Owner or its representatives, and other unforeseeable conditions which may indicate schedule adjustments or completion time extensions. Under such conditions, Owner's Representative will direct the Contractor to reschedule the work or Contract completion time to reflect changed conditions.
    - a. Revise and recalculate the schedule accordingly to indicate the actual effect on related activities.
- F. Float: If the Progress Schedule anticipates early completion of entire Work or any portion of the Work with a separate Contract Time, Contract Float is the number of days between the anticipated date for completion of the Work, or any such portion of the Work, and the corresponding Contract Time. Proceed with the Work according to early start dates. Owner's Representative shall have the right to apportion float time according to the needs of the Project.
1. Contractor agrees that actual delays affecting paths of activities containing float time will not have any affect upon Contract completion times, providing that actual delay does not exceed float time associated with those activities.

END OF SECTION 01 32 00



## SECTION 01 32 33 - PHOTOGRAPHIC DOCUMENTATION

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### 1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for the following:
  - 1. Preconstruction photographs.
  - 2. Periodic construction photographs.
  - 3. Final Completion construction photographs.
- B. Related Sections include the following:
  - 1. Division 01 Section "Submittal Procedures" for submitting construction photographs.
  - 2. Division 31 Section "Micropiles" for preconstruction photograph requirements prior to installation of piles.

#### 1.3 SUBMITTALS

- A. Qualification Data: For firms and persons specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include lists of completed projects with project names and addresses, names and addresses of architects and owners, and other information specified.
- B. Key Plan: Submit key plan of Project site and building with notation of vantage points marked for location and direction of each photograph. Indicate elevation or story of construction. Include the same label information as the corresponding set of photographs.
- C. Construction Photographs: Submit two prints of each photographic view within seven days of taking photographs.
  - 1. Format: 8-by-10-inch smooth-surface matte prints on single-weight commercial-grade stock, enclosed back to back in clear plastic sleeves that are punched for standard 3-ring binder.
  - 2. Identification: On back of each print provide an applied label or rubber-stamped impression with the following information:
    - a. Name of Project.
    - b. Name and address of photographer.
    - c. Name of Architect and Construction Manager.
    - d. Date photograph was taken.

- e. Description of vantage point, indicating location, direction (by compass point), and elevation or story of construction.
3. Digital Images: Submit a complete set of digital image electronic files with each submittal of prints. Identify electronic media with date photographs were taken. Submit images that have the same aspect ratio as the sensor, uncropped.

#### 1.4 QUALITY ASSURANCE

- A. Photographer Qualifications: An individual of established reputation who has been regularly engaged as a professional photographer for not less than three years.

#### 1.5 COORDINATION

- A. Auxiliary Services: Cooperate with photographer and provide auxiliary services requested, including access to Project site and use of temporary facilities including temporary lighting.

### PART 2 - PRODUCTS

#### 2.1 PHOTOGRAPHIC MEDIA

- A. Photographic Film: Medium-format, 35 mm.
- B. Digital Images: Provide images in JPEG format, with minimum sensor size of 4.0 megapixels.

### PART 3 - EXECUTION

#### 3.1 PHOTOGRAPHS, GENERAL

- A. Photographer: Engage a qualified commercial photographer to take construction photographs.
- B. Date Stamp: Unless otherwise indicated, date and time stamp each photograph as it is being taken so stamp is integral to photograph.
- C. Field Office Prints: Retain one set of prints of progress photographs in the field office at Project site, available at all times for reference. Identify photographs the same as for those submitted to Architect and Construction Manager.

#### 3.2 CONSTRUCTION PHOTOGRAPHS

- A. Preconstruction Photographs: Before starting construction, take color photographs of Project site and surrounding properties from different vantage points, as directed by Construction Manager.
  1. Take **eight** photographs to show existing conditions adjacent to the property before starting the Work.

2. Take **eight** photographs of existing buildings either on or adjoining the property to accurately record the physical conditions at the start of construction.
- B. Periodic Construction Photographs: Take **eight** color photographs monthly, coinciding with the cutoff date associated with each Application for Payment. Photographer shall select vantage points to best show status of construction and progress since the last photographs were taken.
- C. Final Completion Construction Photographs: Take **eight** color photographs after date of Substantial Completion for submission as Project Record Documents. Architect will direct photographer for desired vantage points.
1. Do not include date stamp.
- D. Additional Photographs: Architect may issue requests for additional photographs, in addition to periodic photographs specified. Additional photographs will be paid for by Change Order and are not included in the Contract Sum.
1. Photographer will be given three days' notice, where feasible.
  2. In emergency situations, photographer shall take additional photographs within 24 hours of request.
  3. Circumstances that could require additional photographs include, but are not limited to, the following:
    - a. Special events planned at Project site.
    - b. Immediate follow-up when on-site events result in construction damage or losses.
    - c. Photographs to be taken at fabrication locations away from Project site. These photographs are not subject to unit prices or unit-cost allowances.
    - d. Substantial Completion of a major phase or component of the Work.
    - e. Extra record photographs at time of final acceptance.

END OF SECTION 01 32 33

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

## **SECTION 01 33 00 - SUBMITTAL PROCEDURES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### **1.2 SUMMARY**

- A. This Section includes administrative and procedural requirements for submitting Shop Drawings, Product Data, Samples, and other submittals.
- B. Related Sections include the following:
  - 1. Division 01 Section "Payment Procedures" for submitting Applications for Payment and the Schedule of Values.
  - 2. Division 01 Section "Project Management and Coordination" for submitting and distributing meeting and conference minutes.
  - 3. Division 01 Section "Construction Progress Documentation" for submitting schedules and reports, including Contractor's Construction Schedule and the Submittals Schedule.
  - 4. Division 01 Section "Photographic Documentation" for submitting construction photographs.
  - 5. Division 01 Section "Quality Requirements" for submitting test and inspection reports and for mockup requirements.
  - 6. Division 01 Section "Closeout Procedures" for submitting warranties.
  - 7. Division 01 Section "Project Record Documents" for submitting Record Drawings, Record Specifications, and Record Product Data.
  - 8. Division 01 Section "Operation and Maintenance Data" for submitting maintenance manuals.
  - 9. Divisions 02 through 33 Sections for specific requirements for submittals in those Sections.

#### **1.3 DEFINITIONS**

- A. Action Submittals: Written and graphic information and physical samples that require Architect's responsive action. Action submittals are those submittals indicated in individual Specification Sections as "action submittals."
- B. Informational Submittals: Written and graphic information and physical samples that do not require Architect's responsive action. Submittals may be rejected for not complying with requirements. Informational submittals are those submittals indicated in individual Specification Sections as "informational submittals."

- C. Portable Document Format (PDF): An open standard file format licensed by Adobe Systems used for representing documents in a device-independent and display resolution-independent fixed-layout document format.

#### 1.4 ACTION SUBMITTALS

- A. Submittal Schedule: Submit a schedule of submittals, arranged in chronological order by dates required by construction schedule. Include time required for review, ordering, manufacturing, fabrication, and delivery when establishing dates. Include additional time required for making corrections or revisions to submittals noted by Architect and additional time for handling and reviewing submittals required by those corrections.
  - 1. Coordinate submittal schedule with list of subcontracts, the schedule of values, and Contractor's construction schedule.
  - 2. Initial Submittal: Submit concurrently with startup construction schedule. Include submittals required during the first 60 days of construction. List those submittals required to maintain orderly progress of the Work and those required early because of long lead time for manufacture or fabrication.
  - 3. Final Submittal: Submit concurrently with the first complete submittal of Contractor's construction schedule.
    - a. Submit revised submittal schedule to reflect changes in current status and timing for submittals.
  - 4. Format: Arrange the following information in a tabular format:
    - a. Scheduled date for first submittal.
    - b. Specification Section number and title.
    - c. Submittal category: Action; informational.
    - d. Name of subcontractor.
    - e. Description of the Work covered.
    - f. Scheduled date for Architect's final release or approval.
    - g. Scheduled date of fabrication.
    - h. Scheduled dates for purchasing.
    - i. Scheduled dates for installation.
    - j. Activity or event number.

#### 1.5 SUBMITTAL ADMINISTRATIVE REQUIREMENTS

- A. Architect's Digital Data Files: Electronic digital data files of the Contract Drawings will not be provided by Architect for Contractor's use in preparing submittals.
  - 1. Refer to Division 01 Section "Project Management and Coordination" for submitting Coordination Drawings and Contractor's use of Architect's digital data files.
- B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.

1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
  2. Submit all submittal items required for each Specification Section concurrently unless partial submittals for portions of the Work are indicated on approved submittal schedule.
  3. Submit action submittals and informational submittals required by the same Specification Section as separate packages under separate transmittals.
  4. Coordinate transmittal of different types of submittals for related parts of the Work so processing will not be delayed because of need to review submittals concurrently for coordination.
    - a. Architect reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
- C. Processing Time: Allow enough time for submittal review, including time for resubmittals, as follows. Time for review shall commence on Architect's receipt of submittal. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing, including resubmittals.
1. Initial Review: Allow two (2) weeks for initial review of each submittal. Allow additional time if coordination with subsequent submittals is required. Architect will advise Contractor when a submittal being processed must be delayed for coordination.
  2. Intermediate Review: If intermediate submittal is necessary, process it in same manner as initial submittal.
  3. Resubmittal Review: Allow two (2) weeks for review of each resubmittal..
    - a. Resubmittals will be reviewed no more than 2 times at the Owner's expense. Resubmittals which fail to comply with Contract requirements will be reviewed at the Contractor's expense, based on an hourly rate of \$75 per hour, not to exceed \$600 for each subsequent submittal.
    - b. The Owner reserves the right to deduct said reimbursement from the Contractor's application for payment on a monthly basis.
  4. Direct transmission of submittals to Consultants: Submittals may be transmitted directly to the Architect's consultants, with the approval of the Architect. Allow 2 weeks for review of each submittal. Submittal will be returned to Architect before being returned to Contractor.
    - a. The Contractor shall request approval from the Architect prior to transmitting submittals to the Architect's consultants for each Specification Section that the Contractor intends to submit directly to a consultant.
- D. Identification: Place a permanent label or title block on each submittal for identification.
1. Indicate name of firm or entity that prepared each submittal on label or title block.
  2. Provide a stamp approximately 4 by 4 inches on label or beside title block to record Contractor's review and approval markings and action taken by Architect.

- a. The stamp must contain information as indicated on the “Combined Contractor and KBA Inc. Submittal Review Stamp” attached to this section following Part 3.
3. Include the following information on label for processing and recording action taken:
- a. Project name.
  - b. Date.
  - c. Name and address of Architect.
  - d. Name and address of Contractor.
  - e. Name and address of subcontractor.
  - f. Name and address of supplier.
  - g. Name of manufacturer.
  - h. Submittal number or other unique identifier, including revision identifier.
    - 1) Submittal number shall include the Specification Section number followed by a hyphen and the sequence number for that Specification Section, followed by a hyphen and the review number (i.e. the fourth item submitted under Section 06 10 53 which is being resubmitted after an initial review by the Architect would be numbered as 06 10 53 – 004 - Rev 02).
    - 2) Submittals that are required by Specification Sections included in Division 01 shall include the Division 01 Section number, followed by a hyphen and the construction Specification Section number, followed by a hyphen and the sequence number for that Specification Section, followed by a hyphen and the review number. (i.e. If the Maintenance Manual for the Hydraulic Elevator were the first item being submitted as a closeout document in Section 14 24 00, it would be numbered as 01 78 23 - 14 24 00 – 01 - Rev 01).
  - i. Paragraph number from Part 2 of the appropriate Specification Section.
  - j. Drawing number and detail references, as appropriate.
  - k. Location(s) where product is to be installed, and/or proposed use of the product, as appropriate.
  - l. Other necessary identification.
- E. Deviations: Highlight, encircle, or otherwise specifically identify deviations from the Contract Documents on submittals. Differentiate in writing the identified deviations from the products and options which are not in compliance with the Contract Documents.
- F. Additional Copies: Unless additional copies are required for final submittal, and unless Architect observes noncompliance with provisions in the Contract Documents, initial submittal may serve as final submittal.
1. If the Architect approves direct transmission of a submittal to a consultant, the Contractor shall simultaneously transmit one (1) copy of the submittal to the Architect in addition to the required number of submittals. This additional copy will be used as a reference by the Architect during the review and will not be returned to the Contractor. This submittal shall be accompanied by a copy of the transmittal that was sent to the consultant and shall note that it has been transmitted directly to the Architect’s consultant for review.
  2. Additional copies submitted for maintenance manuals will not be marked with action taken and will be returned.



- G. Transmittal: Package each submittal individually and appropriately for transmittal and handling. Transmit each submittal using a transmittal form. Architect will return submittals, without review, received from sources other than Contractor.
1. Transmittal Form: Provide locations on form for the following information:
    - a. Project name.
    - b. Date.
    - c. Destination (To:).
    - d. Source (From:).
    - e. Names of subcontractor, manufacturer, and supplier.
    - f. Category and type of submittal.
    - g. Submittal purpose and description.
    - h. Specification Section number and title.
    - i. Drawing number and detail references, as appropriate.
    - j. Transmittal number numbered consecutively.
    - k. Submittal and transmittal distribution record.
    - l. Remarks.
    - m. Signature of transmitter.
  2. On an attached separate sheet, prepared on Contractor's letterhead, record relevant information, requests for data, revisions other than those requested by Architect on previous submittals, and deviations from requirements in the Contract Documents, including minor variations and limitations. Include same label information as related submittal.
  3. Prepare each transmittal separately for the work of a single specification section.
- H. Resubmittals: Make resubmittals in same form and number of copies as initial submittal.
1. Note date and content of previous submittal.
  2. Note date and content of revision in label or title block and clearly indicate extent of revision.
  3. Resubmit submittals until they are marked "Approved" or "Approved as Corrected."
  4. The Contractor shall resubmit submittals that are returned from the Architect as "Revise and Resubmit" or "Not Approved" using the same submittal number as the original submittal. The Contractor shall revise the Review number, as appropriate.
- I. Distribution: Furnish copies of final submittals to manufacturers, subcontractors, suppliers, fabricators, installers, authorities having jurisdiction, and others as necessary for performance of construction activities. Show distribution on transmittal forms.
- J. Use for Construction: Use only final submittals with mark indicating "Approved" or "Approved as Corrected" taken by Architect.

## PART 2 - PRODUCTS

### 2.1 SUBMITTAL PROCEDURES

- A. General Submittal Procedure Requirements: Prepare and submit submittals required by individual Specification Sections. Types of submittals are indicated in individual Specification Sections.
- B. Product Schedule: Submit a list, in tabular form, showing specified products. Include generic names of products required. Include manufacturer's name and proprietary product names for each product.
1. Coordinate product list with Contractor's Construction Schedule and the Submittals Schedule.
  2. Form: Tabulate information for each product under the following column headings:
    - a. Specification Section number and title.
    - b. Generic name used in the Contract Documents.
    - c. Proprietary name, model number, and similar designations.
    - d. Manufacturer's name and address.
    - e. Supplier's name and address.
    - f. Installer's name and address.
    - g. Projected delivery date or time span of delivery period.
    - h. Identification of items that require early submittal approval for scheduled delivery date.
  3. Initial Submittal: Within 30 days after date of commencement of the Work, submit 3 copies of initial product list. Include a written explanation for omissions of data and for variations from Contract requirements.
  4. Completed List: Within 90 days after date of commencement of the Work, submit 3 copies of completed product list. Include a written explanation for omissions of data and for variations from Contract requirements.
  5. Architect's Action: Architect will respond in writing to Contractor within 15 days of receipt of completed product list. Architect's response will include a list of unacceptable product selections and a brief explanation of reasons for this action. Architect's response, or lack of response, does not constitute a waiver of requirement to comply with the Contract Documents.
- C. Product Data: Collect information into a single submittal for each element of construction and type of product or equipment.
1. If information must be specially prepared for submittal because standard printed data are not suitable for use, submit as Shop Drawings, not as Product Data.
  2. Mark each copy of each submittal to show which products and options are applicable.
  3. Include the following information, as applicable:
    - a. Manufacturer's written recommendations.
    - b. Manufacturer's product specifications.
    - c. Manufacturer's installation instructions.

- d. Standard color charts.
  - e. Manufacturer's catalog cuts.
  - f. Wiring diagrams showing factory-installed wiring.
  - g. Printed performance curves.
  - h. Operational range diagrams.
  - i. Mill reports.
  - j. Standard product operation and maintenance manuals.
  - k. Compliance with specified referenced standards.
  - l. Testing by recognized testing agency.
  - m. Application of testing agency labels and seals.
  - n. Notation of coordination requirements.
4. Submit Product Data before or concurrent with Samples.
  5. Number of Copies: Submit a sufficient number of copies of Product Data, for the Contractor's use and for the Architect to retain three (3) copies for the Architect's, and Owner's Representative's use. Mark up and retain one returned copy as a Project Record Document and additional copies as required for operation and maintenance manuals.
- D. Shop Drawings: Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data.
1. Preparation: Fully illustrate requirements in the Contract Documents. Include the following information, as applicable:
    - a. Dimensions.
    - b. Identification of products.
    - c. Fabrication and installation drawings.
    - d. Roughing-in and setting diagrams.
    - e. Wiring diagrams showing field-installed wiring, including power, signal, and control wiring.
    - f. Shopwork manufacturing instructions.
    - g. Templates and patterns.
    - h. Schedules.
    - i. Design calculations.
    - j. Compliance with specified standards.
    - k. Notation of coordination requirements.
    - l. Notation of dimensions established by field measurement.
    - m. Relationship to adjoining construction clearly indicated.
    - n. Seal and signature of professional engineer if specified.
    - o. Wiring Diagrams: Differentiate between manufacturer-installed and field-installed wiring.
  2. Sheet Size: Except for templates, patterns, and similar full-size drawings, submit Shop Drawings on sheets at least 8-1/2 by 11 inches but no larger than 30 by 40 inches.
  3. Number of Copies: Submit a sufficient number of copies of each submittal, for the Contractor's use and for the Architect to retain three (3) copies for the Architect's, and Owner's Representative's use. Mark up and retain one returned copy as a Project Record Document and additional copies as required for operation and maintenance manuals.

- E. Samples: Submit Samples for review of kind, color, pattern, and texture for a check of these characteristics with other elements and for a comparison of these characteristics between submittal and actual component as delivered and installed.
1. Transmit Samples that contain multiple, related components such as accessories together in one submittal package.
  2. Identification: Attach label on unexposed side of Samples that includes the following:
    - a. Generic description of Sample.
    - b. Product name and name of manufacturer.
    - c. Sample source.
    - d. Number and title of appropriate Specification Section.
  3. Disposition: Maintain sets of approved Samples at Project site, available for quality-control comparisons throughout the course of construction activity. Sample sets may be used to determine final acceptance of construction associated with each set.
    - a. Samples that may be incorporated into the Work are indicated in individual Specification Sections. Such Samples must be in an undamaged condition at time of use.
    - b. Samples not incorporated into the Work, or otherwise designated as Owner's property, are the property of Contractor.
  4. Samples for Initial Selection: Submit manufacturer's color charts consisting of units or sections of units showing the full range of colors, textures, and patterns available.
    - a. Number of Samples: Submit three full set(s) of available choices where color, pattern, texture, or similar characteristics are required to be selected from manufacturer's product line. Architect will return submittal with options selected.
    - b. Color charts for electrical accessories shall be submitted separately from the product data. Each color chart shall reference the Product Data submittal number, be submitted under a separate transmittal and have its own submittal number.
  5. Samples for Verification: Submit full-size units or Samples of size indicated, prepared from same material to be used for the Work, cured and finished in manner specified, and physically identical with material or product proposed for use, and that show full range of color and texture variations expected. Samples include, but are not limited to, the following: partial sections of manufactured or fabricated components; small cuts or containers of materials; complete units of repetitively used materials; swatches showing color, texture, and pattern; color range sets; and components used for independent testing and inspection.
    - a. Number of Samples: Submit three sets of Samples. Architect will retain one Sample set; remainder will be returned. Mark up and retain one returned Sample set as a Project Record Sample.
      - 1) Submit a single Sample where assembly details, workmanship, fabrication techniques, connections, operation, and other similar characteristics are to be demonstrated.

- 2) If variation in color, pattern, texture, or other characteristic is inherent in material or product represented by a Sample, submit at least three sets of paired units that show approximate limits of variations.
- F. Contractor's Construction Schedule: Comply with requirements specified in Division 01 Section "Construction Progress Documentation" for Project Manager's action.
- G. Application for Payment and Schedule of Values: Comply with requirements specified in Division 01 Section "Payment Procedures."
- H. Test and Inspection Reports and Schedule of Tests and Inspections Submittals: Comply with requirements specified in Division 01 Section "Quality Requirements."
- I. Closeout Submittals and Maintenance Material Submittals: Comply with requirements specified in Division 01 Section "Closeout Procedures."
- J. Maintenance Data: Comply with requirements specified in Division 01 Section "Operation and Maintenance Data."
- K. Qualification Data: Prepare written information that demonstrates capabilities and experience of firm or person. Include lists of completed projects with project names and addresses, contact information of architects and owners, and other information specified.
- L. Welding Certificates: Prepare written certification that welding procedures and personnel comply with requirements in the Contract Documents. Submit record of Welding Procedure Specification and Procedure Qualification Record on AWS forms. Include names of firms and personnel certified.
- M. Installer Certificates: Submit written statements on manufacturer's letterhead certifying that Installer complies with requirements in the Contract Documents and, where required, is authorized by manufacturer for this specific Project.
- N. Manufacturer Certificates: Submit written statements on manufacturer's letterhead certifying that manufacturer complies with requirements in the Contract Documents. Include evidence of manufacturing experience where required.
- O. Product Certificates: Submit written statements on manufacturer's letterhead certifying that product complies with requirements in the Contract Documents.
- P. Material Certificates: Submit written statements on manufacturer's letterhead certifying that material complies with requirements in the Contract Documents.
- Q. Material Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting test results of material for compliance with requirements in the Contract Documents.
- R. Product Test Reports: Submit written reports indicating that current product produced by manufacturer complies with requirements in the Contract Documents. Base reports on evaluation of tests performed by manufacturer and witnessed by a qualified testing agency, or on comprehensive tests performed by a qualified testing agency.

- S. Research Reports: Submit written evidence, from a model code organization acceptable to authorities having jurisdiction, that product complies with building code in effect for Project. Include the following information:
1. Name of evaluation organization.
  2. Date of evaluation.
  3. Time period when report is in effect.
  4. Product and manufacturers' names.
  5. Description of product.
  6. Test procedures and results.
  7. Limitations of use.
- T. Preconstruction Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of tests performed before installation of product, for compliance with performance requirements in the Contract Documents.
- U. Compatibility Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of compatibility tests performed before installation of product. Include written recommendations for primers and substrate preparation needed for adhesion.
- V. Field Test Reports: Submit written reports indicating and interpreting results of field tests performed either during installation of product or after product is installed in its final location, for compliance with requirements in the Contract Documents.
- W. Design Data: Prepare and submit written and graphic information, including, but not limited to, performance and design criteria, list of applicable codes and regulations, and calculations. Include list of assumptions and other performance and design criteria and a summary of loads. Include load diagrams if applicable. Provide name and version of software, if any, used for calculations. Include page numbers.
- X. Manufacturer's Instructions: Prepare written or published information that documents manufacturer's recommendations, guidelines, and procedures for installing or operating a product or equipment. Include name of product and name, address, and telephone number of manufacturer. Include the following, as applicable:
1. Preparation of substrates.
  2. Required substrate tolerances.
  3. Sequence of installation or erection.
  4. Required installation tolerances.
  5. Required adjustments.
  6. Recommendations for cleaning and protection.
- Y. Manufacturer's Field Reports: Prepare written information documenting factory-authorized service representative's tests and inspections. Include the following, as applicable:
1. Name, address, and telephone number of factory-authorized service representative making report.
  2. Statement on condition of substrates and their acceptability for installation of product.
  3. Statement that products at Project site comply with requirements.

4. Summary of installation procedures being followed, whether they comply with requirements and, if not, what corrective action was taken.
  5. Results of operational and other tests and a statement of whether observed performance complies with requirements.
  6. Statement whether conditions, products, and installation will affect warranty.
  7. Other required items indicated in individual Specification Sections.
- Z. Insurance Certificates and Bonds: Prepare written information indicating current status of insurance or bonding coverage. Include name of entity covered by insurance or bond, limits of coverage, amounts of deductibles, if any, and term of the coverage.
- AA. Construction Photographs: Comply with requirements specified in Division 01 Section "Photographic Documentation."
- BB. Material Safety Data Sheets (MSDSs): Submit information directly to Owner; do not submit to Architect except as required in "Action Submittals" Article.
- 2.2 DELEGATED DESIGN
- A. Performance and Design Criteria: Where professional design services or certifications by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.
1. If criteria indicated are not sufficient to perform services or certification required, submit a written request for additional information to Architect.

### PART 3 - EXECUTION

#### 3.1 CONTRACTOR'S REVIEW

- A. Review each submittal and check for coordination with other Work of the Contract and for compliance with the Contract Documents. Note corrections and field dimensions. Mark with approval stamp before submitting to Architect.
- B. Approval Stamp: Stamp each submittal with a uniform, approval stamp. Include Project name and location, submittal number, Specification Section title and number, name of reviewer, date of Contractor's approval, and statement certifying that submittal has been reviewed, checked, and approved for compliance with the Contract Documents.
1. Provide "Combined Contractor/KBA Inc. Submittal Review Stamp" attached after this Section.

#### 3.2 ARCHITECT'S ACTION

- A. General: Architect will not review submittals that do not bear Contractor's approval stamp and will return them without action.

- B. Action Submittals: Architect will review each submittal, make marks to indicate corrections or modifications required, and return it. Architect will stamp each submittal with an action stamp and will mark stamp appropriately to indicate action taken, as follows:
1. "Approved": The portion of Work covered by the submittal may proceed provided it complies with the Contract Documents.
  2. "Approved as Corrected": The portion of Work covered by the submittal may proceed provided it complies with notations or corrections on the submittal, and with the Contract Documents.
  3. "Not Approved" or "Revise and Resubmit": Revise or prepare a new submittal in accordance with notations; resubmit. Do not proceed with that portion of the Work covered by the submittal.
- C. Informational Submittals: Where a submittal is for information, record purposes or special processing or other activity, the Architect will review each submittal, and mark it "Reviewed" or will return it if it does not comply with requirements. Architect will forward each submittal to appropriate party.
- D. Partial submittals are not acceptable, will be considered nonresponsive, and will be returned without review.
- E. Unsolicited Submittals: Submittals not required by the Contract Documents may not be reviewed and may be discarded.
- F. Return of Submittals: Architect will return submittals to Contractor via standard USPS mail or standard rate for private delivery. If the Contractor requires expedited delivery, the Contractor must provide the Architect with an active shipping account number and forms in order to pay for expedited delivery.

### 3.3 FORMS


- A. The following form referenced in this Section is attached:
1. Combined Contractor and KBA Inc. Submittal Review Stamp, 1 page.

END OF SECTION 01 33 00



# COMBINED CONTRACTOR AND K.B.A. INC. SUBMITTAL REVIEW STAMP

|   |  |
|---|--|
| CONTRACTOR: _____   |  |
| PROJECT: _____  |  |
| PARAGRAPH. NO.: _____   | SUBMITTAL NO.: _____   |
| CONTRACTOR HAS DETERMINED AND VERIFIED MATERIALS, FIELD MEASUREMENTS AND FIELD CONSTRUCTION CRITERIA AND HAS CHECKED AND COORDINATED THE INFORMATION CONTAINED IN THIS SUBMITTAL WITH THE REQUIREMENTS OF THE WORK AND OF THE CONTRACT DOCUMENTS AND RECOMMENDS APPROVAL BY THE ARCHITECT/ENGINEER.   |  |
| BY: _____ DATE: _____   |  |
| KAESTLE BOOS ASSOC. PROJECT NO.: <u>16058.00</u>  |  |
| ARCHITECTS/ENGINEERS<br>DATE RECEIVED STAMP:  | <div style="border: 1px solid black; width: 200px; height: 80px; margin: 0 auto;"></div> |
| COMMENTS MADE ON THE SUBMITTALS DURING THIS REVIEW DO NOT RELIEVE THE CONTRACTOR FROM COMPLIANCE WITH REQUIREMENTS OF THE CONTRACT DOCUMENTS. REVIEWING IS ONLY FOR CONFORMANCE WITH THE DESIGN CONCEPT OF THE PROJECT AND COMPLIANCE WITH THE INFORMATION GIVEN IN THE CONTRACT DOCUMENTS. THE CONTRACTOR IS RESPONSIBLE FOR DIMENSIONS TO BE CONFIRMED AND CORRELATED AT THE SITE; FOR INFORMATION THAT PERTAINS SOLELY TO THE FABRICATION PROCESSES OR TO THE MEANS, METHODS, TECHNIQUES, SEQUENCES AND PROCEDURES OF CONSTRUCTION; AND FOR COORDINATION OF THIS WORK WITH THE WORK OF ALL TRADES. |  |
| ACTION STAMP:   | <div style="border: 1px solid black; width: 400px; height: 50px; margin: 0 auto;"></div> |

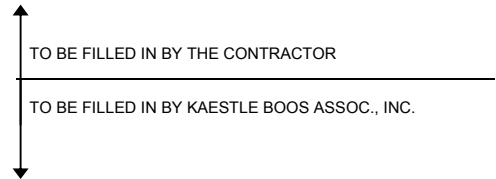

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

## **SECTION 01 35 01 – FLOOD CONTINGENCY PLAN**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### **1.2 ACTION SUBMITTALS (NOT APPLICABLE)**

#### **1.3 SCOPE OF WORK**

- A. Familiarization with limits of Long Meadow Pond Brook limits and associated 100-year and 500-year floodplains.
- B. Monitoring of weather reports from the National Weather Service or other weather forecast sources.
- C. Ensuring construction vehicles, equipment, trailers, stockpiled construction materials, and any other supplies that may become buoyant are secured and located outside of the limits of the 100-year and 500-year floodplains.
- D. Identify flood evacuation routes and shelters which are identified on mapping located in fire department rescue trucks and at fire department dispatch locations.
- E. Familiarization with the Borough of Naugatuck All-Hazard Emergency Operations Plan.

### **PART 2 - PRODUCTS (NOT APPLICABLE)**

### **PART 3 - EXECUTION**

#### **3.1 IDENTIFICATION**

- A. Prior to commencement of work, contractor shall become familiar with the limits of the Long Meadow Pond Brook and associated 100-year and 500-year floodplains.
- B. Prior to commencement of work, contractor shall become familiar with the Borough of Naugatuck All-Hazard Emergency Operations Plan.
- C. Prior to commencement of work, contractor shall identify flood evacuation routes and shelters provided on mapping found in fire department rescue trucks and dispatch locations.

#### **3.2 PROTECTION**

- A. Contractor shall ensure construction vehicles, equipment, trailers, stockpiled construction materials, and any other supplies that may become buoyant are secured and located outside of the limits of the 100-year and 500-year floodplains.

- B. Contractor shall monitor weather reports through the National Weather Service or other weather forecasting service to identify when construction within the 100-year and 500-year floodplain limits should not occur.

END OF SECTION 01 35 00

## SECTION 01 40 00 - QUALITY REQUIREMENTS

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### 1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for quality assurance and quality control.
- B. Testing and inspecting services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.
  - 1. Specific quality-assurance and -control requirements for individual construction activities are specified in the Sections that specify those activities. Requirements in those Sections may also cover production of standard products.
  - 2. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and -control procedures that facilitate compliance with the Contract Document requirements.
  - 3. Requirements for Contractor to provide quality-assurance and -control services required by Architect, Owner, or authorities having jurisdiction are not limited by provisions of this Section.
- C. Related Sections include the following:
  - 1. Division 01 Section "Construction Progress Documentation" for developing a schedule of required tests and inspections.
  - 2. Division 01 Section "Cutting and Patching" for repair and restoration of construction disturbed by testing and inspecting activities.
  - 3. Divisions 02 through 33 Sections for specific test and inspection requirements.

#### 1.3 DEFINITIONS

- A. Quality-Assurance Services: Activities, actions, and procedures performed before and during execution of the Work to guard against defects and deficiencies and substantiate that proposed construction will comply with requirements.
- B. Quality-Control Services: Tests, inspections, procedures, and related actions during and after execution of the Work to evaluate that actual products incorporated into the Work and completed construction comply with requirements. Services do not include contract enforcement activities performed by Architect or Project Manager.

- C. Mockups: Full-size, physical assemblies that are constructed on-site. Mockups are used to verify selections made under sample submittals, to demonstrate aesthetic effects and, where indicated, qualities of materials and execution, and to review construction, coordination, testing, or operation; they are not Samples. Approved mockups establish the standard by which the Work will be judged.
- D. Preconstruction Testing: Tests and inspections that are performed specifically for the Project before products and materials are incorporated into the Work to verify performance or compliance with specified criteria.
- E. Product Testing: Tests and inspections that are performed by an NRTL, an NVLAP, or a testing agency qualified to conduct product testing and acceptable to authorities having jurisdiction, to establish product performance and compliance with industry standards.
- F. Source Quality-Control Testing: Tests and inspections that are performed at the source, i.e., plant, mill, factory, or shop.
- G. Field Quality-Control Testing: Tests and inspections that are performed on-site for installation of the Work and for completed Work.
- H. Testing Agency: An entity engaged to perform specific tests, inspections, or both. Testing laboratory shall mean the same as testing agency.
- I. Installer/Applicator/Erector: Contractor or another entity engaged by Contractor as an employee, Subcontractor, or Sub-subcontractor, to perform a particular construction operation, including installation, erection, application, and similar operations.
  - 1. Using a term such as "carpentry" does not imply that certain construction activities must be performed by accredited or unionized individuals of a corresponding generic name, such as "carpenter." It also does not imply that requirements specified apply exclusively to tradespeople of the corresponding generic name.
- J. Experienced: When used with an entity, "experienced" means having successfully completed a minimum of five previous projects similar in size and scope to this Project; being familiar with special requirements indicated; and having complied with requirements of authorities having jurisdiction.

#### 1.4 CONFLICTING REQUIREMENTS

- A. General: If compliance with two or more standards is specified and the standards establish different or conflicting requirements for minimum quantities or quality levels, comply with the most stringent requirement. Refer uncertainties and requirements that are different, but apparently equal, to Architect for a decision before proceeding.
- B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified shall be the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as

appropriate, for the context of requirements. Refer uncertainties to Architect for a decision before proceeding.

## 1.5 SUBMITTALS

- A. Qualification Data: For testing agencies specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include proof of qualifications in the form of a recent report on the inspection of the testing agency by a recognized authority.
- B. Schedule of Tests and Inspections: Prepare in tabular form and include the following:
1. Specification Section number and title.
  2. Description of test and inspection.
  3. Identification of applicable standards.
  4. Identification of test and inspection methods.
  5. Number of tests and inspections required.
  6. Time schedule or time span for tests and inspections.
  7. Entity responsible for performing tests and inspections.
  8. Requirements for obtaining samples.
  9. Unique characteristics of each quality-control service.
- C. Reports: Prepare and submit certified written reports that include the following:
1. Date of issue.
  2. Project title and number.
  3. Name, address, and telephone number of testing agency.
  4. Dates and locations of samples and tests or inspections.
  5. Names of individuals making tests and inspections.
  6. Description of the Work and test and inspection method.
  7. Identification of product and Specification Section.
  8. Complete test or inspection data.
  9. Test and inspection results and an interpretation of test results.
  10. Record of temperature and weather conditions at time of sample taking and testing and inspecting.
  11. Comments or professional opinion on whether tested or inspected Work complies with the Contract Document requirements.
  12. Name and signature of laboratory inspector.
  13. Recommendations on retesting and reinspecting.
- D. Permits, Licenses, and Certificates: For Owner's records, submit copies of permits, licenses, certifications, inspection reports, releases, jurisdictional settlements, notices, receipts for fee payments, judgments, correspondence, records, and similar documents, established for compliance with standards and regulations bearing on performance of the Work.

## 1.6 QUALITY ASSURANCE

- A. General: Qualifications paragraphs in this Article establish the minimum qualification levels required; individual Specification Sections specify additional requirements.

- B. Installer Qualifications: A firm or individual experienced in installing, erecting, or assembling work similar in material, design, and extent to that indicated for this Project, whose work has resulted in construction with a record of successful in-service performance.
- C. Manufacturer Qualifications: A firm experienced in manufacturing products or systems similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.
- D. Fabricator Qualifications: A firm experienced in producing products similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.
- E. Professional Engineer Qualifications: A professional engineer who is legally qualified to practice in the State of Connecticut and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of the system, assembly, or product that are similar to those indicated for this Project in material, design, and extent.
- F. Specialists: Certain sections of the Specifications require that specific construction activities shall be performed by entities who are recognized experts in those operations. Specialists shall satisfy qualification requirements indicated and shall be engaged for the activities indicated.
  - 1. Requirement for specialists shall not supersede building codes and regulations governing the Work.
- G. Testing Agency Qualifications: An NRTL, an NVLAP, or an independent agency with the experience and capability to conduct testing and inspecting indicated, as documented according to ASTM E 548; and with additional qualifications specified in individual Sections; and where required by authorities having jurisdiction, that is acceptable to authorities.
  - 1. NRTL: A nationally recognized testing laboratory according to 29 CFR 1910.7.
  - 2. NVLAP: A testing agency accredited according to NIST's National Voluntary Laboratory Accreditation Program.
- H. Factory-Authorized Service Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- I. Preconstruction Testing: Where testing agency is indicated to perform preconstruction testing for compliance with specified requirements for performance and test methods, comply with the following:
  - 1. Contractor responsibilities include the following:
    - a. Provide test specimens representative of proposed products and construction.
    - b. Submit specimens in a timely manner with sufficient time for testing and analyzing results to prevent delaying the Work.



- c. Provide sizes and configurations of test assemblies, mockups, and laboratory mockups to adequately demonstrate capability of products to comply with performance requirements.
  - d. Build site-assembled test assemblies and mockups using installers who will perform same tasks for Project.
  - e. Build laboratory mockups at testing facility using personnel, products, and methods of construction indicated for the completed Work.
  - f. When testing is complete, remove test specimens, assemblies, mockups, and laboratory mockups; do not reuse products on Project.
  - g. Payment for preconstruction testing is the responsibility of the Contractor.
2. Testing Agency Responsibilities: Submit a certified written report of each test, inspection, and similar quality-assurance service to Architect with copy to Contractor. Interpret tests and inspections and state in each report whether tested and inspected work complies with or deviates from the Contract Documents.
- J. Mockups: Before installing portions of the Work requiring mockups, build mockups for each form of construction and finish required to comply with the following requirements, using materials indicated for the completed Work:
1. Build mockups in location and of size indicated or, if not indicated, as directed by Architect.
  2. Notify Architect seven days in advance of dates and times when mockups will be constructed.
  3. Demonstrate the proposed range of aesthetic effects and workmanship.
  4. Obtain Architect's approval of mockups before starting work, fabrication, or construction.
    - a. Allow seven days for initial review and each re-review of each mockup.
  5. Maintain mockups during construction in an undisturbed condition as a standard for judging the completed Work.
  6. Demolish and remove mockups when directed, unless otherwise indicated.

## 1.7 QUALITY CONTROL

- A. Owner Responsibilities: Where quality-control services are indicated as Owner's responsibility, Owner will engage a qualified testing agency to perform these services.
1. Owner will furnish Contractor with names, addresses, and telephone numbers of testing agencies engaged and a description of types of testing and inspecting they are engaged to perform.
  2. Payment for these services will be made by the Owner.
  3. Costs for retesting and reinspecting construction that replaces or is necessitated by work that failed to comply with the Contract Documents will be charged to Contractor and the Contract Sum will be adjusted by Change Order.
- B. Tests and inspections not explicitly assigned to Owner are Contractor's responsibility. Unless otherwise indicated, provide quality-control services specified and those required by authorities having jurisdiction. Perform quality-control services required of Contractor by authorities having jurisdiction, whether specified or not.

1. Where services are indicated as Contractor's responsibility, engage a qualified testing agency to perform these quality-control services.
    - a. Contractor shall not employ same entity engaged by Owner, unless agreed to in writing by Owner.
  2. Notify testing agencies at least 24 hours in advance of time when Work that requires testing or inspecting will be performed.
  3. Where quality-control services are indicated as Contractor's responsibility, submit a certified written report, in duplicate, of each quality-control service.
  4. Testing and inspecting requested by Contractor and not required by the Contract Documents are Contractor's responsibility.
  5. Submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.
- C. **Manufacturer's Field Services:** Where indicated, engage a factory-authorized service representative to inspect field-assembled components and equipment installation, including service connections. Report results in writing as specified in Division 01 Section "Submittal Procedures."
- D. **Retesting/Reinspecting:** Regardless of whether original tests or inspections were Contractor's responsibility, provide quality-control services, including retesting and reinspecting, for construction that replaced Work that failed to comply with the Contract Documents.
- E. **Testing Agency Responsibilities:** Cooperate with Architect and Contractor in performance of duties. Provide qualified personnel to perform required tests and inspections.
1. Notify Architect and Contractor promptly of irregularities or deficiencies observed in the Work during performance of its services.
  2. Determine the location from which test samples will be taken and in which in-situ tests are conducted.
  3. Conduct and interpret tests and inspections and state in each report whether tested and inspected work complies with or deviates from requirements.
  4. Submit a certified written report, in duplicate, of each test, inspection, and similar quality-control service through Contractor.
  5. Do not release, revoke, alter, or increase the Contract Document requirements or approve or accept any portion of the Work.
  6. Do not perform any duties of Contractor.
- F. **Associated Services:** Cooperate with agencies performing required tests, inspections, and similar quality-control services, and provide reasonable auxiliary services as requested. Notify agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:
1. Access to the Work.
  2. Incidental labor and facilities necessary to facilitate tests and inspections.
  3. Adequate quantities of representative samples of materials that require testing and inspecting. Assist agency in obtaining samples.
  4. Facilities for storage and field curing of test samples.
  5. Delivery of samples to testing agencies.

6. Preliminary design mix proposed for use for material mixes that require control by testing agency.
  7. Security and protection for samples and for testing and inspecting equipment at Project site.
- G. Coordination: Coordinate sequence of activities to accommodate required quality-assurance and -control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting.
1. Schedule times for tests, inspections, obtaining samples, and similar activities.
- H. Schedule of Tests and Inspections: Prepare a schedule of tests, inspections, and similar quality-control services required by the Contract Documents. Submit schedule within 30 days of date established for the Notice to Proceed.
1. Distribution: Distribute schedule to Owner, Project Manager, Architect, testing agencies, and each party involved in performance of portions of the Work where tests and inspections are required.

## 1.8 SPECIAL TESTS AND INSPECTIONS

- A. Special Tests and Inspections: Owner will engage a qualified special inspector to conduct special tests and inspections as set forth in the Engineer of Record's statement of Special Inspections, in accordance with the requirements of the Connecticut State Building Code, as the responsibility of Owner, and as follows:
1. Verifying that manufacturer maintains detailed fabrication and quality-control procedures and reviewing the completeness and adequacy of those procedures to perform the Work.
  2. Notifying Architect, and Contractor promptly of irregularities and deficiencies observed in the Work during performance of its services.
  3. Submitting a certified written report of each test, inspection, and similar quality-control service to Architect with copy to Contractor and to authorities having jurisdiction.
  4. Submitting a final report of special tests and inspections at Substantial Completion, which includes a list of unresolved deficiencies.
  5. Interpreting tests and inspections and stating in each report whether tested and inspected work complies with or deviates from the Contract Documents.
  6. Retesting and reinspecting corrected work.

## PART 2 - PRODUCTS (Not Used)

## PART 3 - EXECUTION

### 3.1 TEST AND INSPECTION LOG

- A. Prepare a record of tests and inspections. Include the following:
1. Date test or inspection was conducted.

2. Description of the Work tested or inspected.
  3. Date test or inspection results were transmitted to Architect.
  4. Identification of testing agency or special inspector conducting test or inspection.
- B. Maintain log at Project site. Post changes and modifications as they occur. Provide access to test and inspection log for Architect's reference during normal working hours.

### 3.2 REPAIR AND PROTECTION

- A. General: On completion of testing, inspecting, sample taking, and similar services, repair damaged construction and restore substrates and finishes.
1. Provide materials and comply with installation requirements specified in other Specification Sections. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible.
  2. Comply with the Contract Document requirements for Division 01 Section "Cutting and Patching."
- B. Protect construction exposed by or for quality-control service activities.
- C. Repair and protection are Contractor's responsibility, regardless of the assignment of responsibility for quality-control services.

END OF SECTION 01 40 00

## SECTION 01 42 00 - REFERENCES

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### 1.2 DEFINITIONS

- A. General: Basic Contract definitions are included in the Conditions of the Contract.
- B. "Approved": When used to convey Architect's action on Contractor's submittals, applications, and requests, "approved" is limited to Architect's duties and responsibilities as stated in the Conditions of the Contract.
- C. "Directed": A command or instruction by Architect. Other terms including "requested," "authorized," "selected," "approved," "required," and "permitted" have the same meaning as "directed."
- D. "Indicated": Requirements expressed by graphic representations or in written form on Drawings, in Specifications, and in other Contract Documents. Other terms including "shown," "noted," "scheduled," and "specified" have the same meaning as "indicated."
- E. "Regulations": Laws, ordinances, statutes, and lawful orders issued by authorities having jurisdiction, and rules, conventions, and agreements within the construction industry that control performance of the Work.
- F. "Furnish": Supply and deliver to Project site, ready for unloading, unpacking, assembly, installation, and similar operations.
- G. "Install": Operations at Project site including unloading, temporarily storing, unpacking, assembling, erecting, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning, and similar operations.
- H. "Provide": Furnish and install, complete and ready for the intended use.
- I. "Project Site": Space available for performing construction activities. The extent of Project site is shown on Drawings and may or may not be identical with the description of the land on which Project is to be built.

### 1.3 INDUSTRY STANDARDS

- A. Applicability of Standards: Unless the Contract Documents include more stringent requirements, applicable construction industry standards have the same force and effect as if bound or copied directly into the Contract Documents to the extent referenced. Such standards are made a part of the Contract Documents by reference.
- B. Publication Dates: Comply with standards in effect as of date of the Contract Documents, unless otherwise indicated.
- C. Copies of Standards: Each entity engaged in construction on Project should be familiar with industry standards applicable to its construction activity. Copies of applicable standards are not bound with the Contract Documents.
  - 1. Where copies of standards are needed to perform a required construction activity, obtain copies directly from publication source.
- D. Abbreviations and Acronyms for Standards and Regulations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the trade association, standards-generating organization, authority having jurisdiction, or other entity applicable to the context of the text provision.

### 1.4 ABBREVIATIONS AND ACRONYMS

- A. Industry Organizations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities indicated in Gale Research's "Encyclopedia of Associations" or in Columbia Books' "National Trade & Professional Associations of the U.S."

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 01 42 00

## SECTION 01 50 00 - TEMPORARY FACILITIES AND CONTROLS

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### 1.2 SUMMARY

- A. This Section specifies requirements for temporary utilities, support facilities, and security and protection facilities.
  - 1. Temporary utilities required include but are not limited to:
    - a. Water service and distribution.
    - b. Temporary electric power.
  - 2. Temporary support facilities required include but are not limited to:
    - a. Storage containers.
    - b. Sanitary facilities, including drinking water.
    - c. Temporary Project identification signs.
    - d. Waste disposal services.
    - e. Construction aids and miscellaneous services and facilities.
  - 3. Security and protection facilities required include but are not limited to:
    - a. Temporary fire protection.
    - b. Barricades, warning signs, lights.
    - c. Environmental protection.

Related Sections include the following:

- 4. Division 01 Section "Summary" for limitations on utility interruptions and other work restrictions.

#### 1.3 USE CHARGES

- A. General: Cost or use charges for temporary facilities shall be included in the Contract Sum and paid for by the Contractor unless explicitly stated otherwise in the Contract Documents. Allow other entities to use temporary services and facilities without cost, including, but not limited to, Owner, Architect, occupants of Project, testing agencies, and authorities having jurisdiction.

- B. Water Service: Water from Owner's existing water system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.
- C. Electric Power Service: Electric power from existing system if available for use without metering and without payment of use charges can be used by the contractor to provide necessary power. Provide connections and extensions of services as required for construction operations.

#### 1.4 QUALITY ASSURANCE

- A. Regulations: Comply with industry standards and applicable laws and regulations of authorities having jurisdiction, including but not limited to:
  - 1. Building Code requirements.
  - 2. Health and safety regulations.
  - 3. Utility company regulations.
  - 4. Police and Fire Department rules.
  - 5. Environmental protection regulations.
- B. Standards: Comply with NFPA Code 241, "Building Construction and Demolition Operations", ANSI-A10 Series standards for "Safety Requirements for Construction and Demolition", OSHA Part 1926, Construction Safety and Health Regulations, and NECA Electrical Design Library "Temporary Electrical Facilities."
  - 1. Refer to "Guidelines for Bid Conditions for Temporary Job Utilities and Services", prepared jointly by AGC and ASC, for industry recommendations.
- C. Inspections: Arrange for authorities having jurisdiction to inspect and test each temporary utility before use. Obtain required certifications and permits. All associated costs are the responsibility of the Contractor.

#### 1.5 PROJECT CONDITIONS

- A. Temporary Utilities: Prepare a schedule indicating dates for implementation and termination of each temporary utility within 15 days of the date established for commencement of the Work.
- B. Conditions of Use: Keep temporary services and facilities clean and neat in appearance. Operate in a safe and efficient manner. Take necessary fire prevention measures. Do not overload facilities, or permit them to interfere with progress. Do not allow hazardous dangerous or unsanitary conditions, or public nuisances to develop or persist on the site.
- C. Prevention of Fire: Take all necessary precautions for the prevention of fire during construction. Keep the area within the contract limits orderly and clean and promptly remove combustible rubbish from the site.
  - 1. Store combustible materials on the site only as established in the Contractor=s approved Safety Plan.



2. Comply with all suggestions, official recommendations, and lawful requirements of the local fire department regarding fire protection.
  3. Contractor to arrange and pay for fire watch as required.
- D. Provide and maintain in good working order under all conditions, suitable and adequate fire protection equipment and services.

## PART 2 - PRODUCTS

### 2.1 MATERIALS

- A. General: Provide new materials; if acceptable to the Architect, undamaged previously used materials in serviceable condition may be used. Provide materials suitable for the use intended.
- B. Tarpaulins: Provide waterproof, fire-resistant, UL labeled tarpaulins with flame-spread rating of 15 or less. For temporary enclosures provide translucent nylon reinforced laminated polyethylene or polyvinyl chloride fire retardant tarpaulins.
- C. Water: Provide potable water approved by local health authorities.

### 2.2 TEMPORARY FACILITIES

- A. Common-Use Field Office:
  1. If required, the Owner will provide the Contractor with a space to accommodate a temporary field office within the building for the duration of the project, in accordance with the project schedule indicated in Division 01 Section "Summary."
- B. Storage and Fabrication Sheds: Provide sheds sized, furnished, and equipped to accommodate materials and equipment for construction operations.
  1. Store combustible materials apart from building.
  2. Coordinate storage location with owner
- C. Sanitary Facilities: Provide self-contained, single-occupant toilet units of the chemical type, properly ventilated and fully enclosed with a glass-fiber reinforced polyester shell, or equivalent. Locate facilities in a location approved by owner.
- D. All staging

### 2.3 EQUIPMENT

- A. General: Provide new equipment; if acceptable to the Architect, undamaged, previously used equipment in serviceable condition may be used. Provide equipment suitable for use intended.

- B. Water Hoses: Provide 3/4" heavy-duty, abrasion-resistant, flexible rubber hoses 100 ft. long, with pressure rating greater than the maximum pressure of the water distribution system; provide adjustable shut-off nozzles at hose discharge.
- C. Electrical Power Cords: Provide grounded extension cords; use "hard-service" cords where exposed to abrasion and traffic. Provide waterproof connectors to connect separate lengths of electric cords if single lengths will not reach areas where construction activities are in progress outside of the building, or lengths of electric cords less than 50 ft. are used within the building.
- D. Fire Extinguishers: Provide hand-carried, portable UL-rated, class "A" fire extinguishers for temporary offices and similar spaces. In other locations provide hand-carried, portable, UL-rated, class "ABC" dry chemical extinguishers, or a combination of extinguishers of NFPA recommended classes for the exposures.
  - 1. Comply with NFPA 10 and 241 for classification, extinguishing agent and size required by location and class of fire exposure.

### PART 3 - EXECUTION

#### 3.1 INSTALLATION, GENERAL

- A. Use qualified personnel for installation of temporary facilities. Locate facilities where they will serve the Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the work, at no additional cost to the Owner.
- B. Provide each facility ready for use when needed to avoid delay. Maintain and modify as required. Do not remove until facilities are no longer needed, or are replaced by authorized use of completed permanent facilities.

#### 3.2 TEMPORARY UTILITY INSTALLATION

- A. General: Engage the appropriate local utility company to install temporary service. Where the company provides only part of the service, provide the remainder with matching, compatible materials and equipment; comply with the company's recommendations.
  - 1. Arrange with the company for a time when service can be interrupted, where necessary, to make connections for temporary services.
- B. Sanitary Facilities: The Contractor shall provide temporary toilets, wash facilities, and drinking water for use of construction personnel. Comply with authorities having jurisdiction for type, number, location, operation, and maintenance of fixtures and facilities.
- C. Electric Power Service: Connect to Owner's existing electric power service if it is available. Maintain equipment in a condition acceptable to Owner.

### 3.3 SUPPORT FACILITIES INSTALLATION

- A. General: Locate field offices, storage containers, sanitary facilities and other temporary construction and support facilities for easy access.
  - 1. Confine apparatus, storage materials, equipment, supplies and operations to the areas bounded by the Contract and as directed by the Architect and Owner's Representative.
  - 2. Maintain support facilities until near Substantial Completion. Remove prior to Substantial Completion. Personnel remaining after Substantial Completion will be permitted to use permanent facilities, under conditions acceptable to the Owner.
- B. Provide incombustible construction for offices, shops and containers located within the construction area, or within 30 feet of building lines. Comply with requirements of NFPA 241.
  - 1. Trailer Installation: Securely support on temporary masonry or preservative treated wood piers, set level throughout office areas, and anchor against overturning due to wind or other cause.
    - a. Installation on trailer wheels will not be accepted.
- C. Traffic Controls: Comply with requirements of authorities having jurisdiction.
  - 1. Protect existing site improvements to remain including curbs, pavement, and utilities.
  - 2. Maintain access for fire-fighting equipment and access to fire hydrants.
  - 3. Make all necessary arrangements and pay for the services of police officers and firefighters at the prevailing wage for such services as may be required for traffic control or fire watch for the performance of any portion of the Work.
- D. Parking: Use designated areas of Owner's existing parking areas, as directed by Owner's Representative, for construction personnel.
- E. Temporary Lifts and Hoists: The Contractor shall provide, operate and maintain in safe operating order facilities for hoisting materials, rubbish, employees and to otherwise carry out the Work. The Contractor shall only provide temporary hoists and lifts where the capacity of truck cranes and similar devices cannot be used due to height, weight, and/or lateral distance limitations of truck cranes and similar devices. Temporary hoists and lifts shall be limited to stationary tower cranes, stationary hoists, and steel track crawler cranes. Truck cranes, fork lifts, man lifts and similar devices used for hoisting materials are considered "tools and equipment" and not temporary facilities.
  - 1. Provide temporary lifts and hoists that comply in all respects with the most stringent of all applicable Federal (including OSHA), state and local laws, rules, regulations, codes and ordinances, and provisions of Division 01 of this Specification.
- F. Project Identification and Temporary Signs: Prepare one project identification and other signs of the size indicated; install signs where indicated to inform the public and persons seeking entrance to the Project. Support on posts or framing of preservative treated wood. Do not permit installation of unauthorized signs.

1. Project Identification Sign: Erect a 4' x 8' x 3/4" plywood sign. Frame with 2 x 4 center cross bracing, and three 4 x 4 x 12' long posts in 12" diameter by 4' deep concrete piers. Mount sign to framing with four 3/8" diameter lug bolts and washers on each side of the sign.
  2. Engage an experienced sign painter to apply graphics, provided by the Architect. Apply three coats to the sign face, and one coat to the sides and rear.
  3. Temporary Signs: Erect 12"W x 18"H x 3/4" plywood signs as required to provide directional information to construction personnel and visitors.
- G. Collection and Disposal of Waste: Collect waste from construction areas and elsewhere daily. Comply with requirements of NFPA 241 for removal of combustible waste material and debris. Enforce requirements strictly. Do not hold materials more than 7 days during normal weather or 3 days when the temperature is expected to rise above 80 deg F (27 deg C). Handle hazardous, dangerous, or unsanitary waste materials separately from other waste by containerizing properly. Dispose of material in a lawful manner.
1. Provide sufficient quantity of dumpsters at strategic locations within the Contract limit lines for collection of waste from the work of all subcontractors on site.
  2. Do not pass materials through open windows, or through window openings when any portion of the window remains in the opening.

### 3.4 SECURITY AND PROTECTION FACILITIES INSTALLATION

- A. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction in ways and by methods that comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects.
1. Comply with work restrictions specified in Division 01 Section "Summary."
  2. Comply with work restrictions specified in Division 31 Section "Environmental Controls".
  3. Comply with work restrictions specified in Division 31 Section "Soil Erosion and Sediment Control".
- B. Protection: Protect the Work at all times from damages. Provide all pumps, equipment and enclosures to ensure this protection.
1. Remove all snow and ice as may be required for proper protection and prosecution of the work.
  2. Provide all shoring, bracing and sheeting as required for safety and for proper execution of work.
  3. Protect all work from damage during cold weather. If low temperatures make it impossible to continue operations safely in spite of cold weather precautions, cease work and so notify Architect. Repair and/or replacement of all work damaged from frost, freezing or any elements of the weather are the responsibility of the Contractor.
  4. Should high wind warnings be issued by the U.S. Weather Advisory Bureau, take every precaution to minimize danger to persons, to the Work, and to adjacent properties,

- including, but not limited to, removing all loose materials, tools and/or equipment from exposed locations, and removing or securing scaffolding or other temporary work.
5. Protect the building and the site from damage, loss or liability due to theft or vandalism when the work is not in progress at night, weekends, or holidays.
  6. Exercise precaution for the protection of persons and property at all times. Observe the provisions of applicable laws and construction codes. Take additional safety and health measures, or cause such measures to be taken as reasonably necessary. Maintain guards on machinery, equipment and other hazards as set forth in the safety provisions of the Manual of Accident Prevention in Construction, published by the Associated General Contractors of America, to the extent that such provisions are not in contravention of applicable laws.
  7. Protect and preserve in operating conditions all utilities traversing the work area. Repair all damages to any utility due to work performed under this Contract, the satisfaction of the Architect at no additional cost to the Owner.
- C. Protect all surfaces against possible damage from operations under this Contract.
1. Restore or replace all surfaces that are damaged by operations under this Contract to their original condition, to the satisfaction of the Architect, at no additional expense to the Owner.
  2. Contractor to submit a Project Approach that addresses protection of interior finishes during demolition and reconstruction.
- D. Do not load, or allow any part of the structure to be loaded, with a weight that will endanger its safety or the safety of personnel operating in or around the premises.
- E. Temporary Fire Protection: Until fire protection needs are supplied by permanent facilities, install and maintain temporary fire protection facilities of the types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 10 "Standard for Portable Fire Extinguishers," and NFPA 241 "Standard for Safeguarding Construction, Alterations and Demolition Operations."
1. Locate fire extinguishers where convenient and effective for their intended purpose, but not less than one extinguisher on each floor at or near each usable stairwell.
  2. Store combustible materials, inflammable materials and volatile liquids in containers in fire-safe containers and locations under the Contractor's control and supervision, or without adequate ventilation and fire protection.
  3. Maintain unobstructed access to fire extinguishers, fire hydrants, temporary fire protection facilities, stairways and other access routes for fighting fires. Prohibit smoking in hazardous fire exposure areas.
  4. Do not permit accumulation of flammable rubbish to remain in the building overnight.
  5. Do not permit storage of paint rags to remain in the building unless stored in a container immersed in water.
  6. Observe strict safety precautions and provide supervision of welding operations, burning with a torch, combustion type temporary heating units, and similar sources of fire ignition.
  7. No gasoline may be stored in or close to the building at any time.
  8. Comply with requirements of local Fire Department, obtain Hot Work Permit for each day required, and pay all fees and other charges.

- F. Site Safety Barricade and Construction Staging Area: Fencing and safety barricade shall be installed by the contractor as required for the contractor to maintain a safe and secure site and staging area at all times. Before construction operations begin, furnish and install site enclosure fence and gates in a manner that will prevent people and animals from easily entering site and staging areas except by entrance gates. Safety Barricade may also be utilized to encompass site work areas as permitted by the Owner. The contractor shall review site security, fencing and safety barricade layout, staging and phasing with the Owner prior to commencing work. The contractor shall make any adjustments to staging plans as required to receive the Owner's final acceptance at no additional expense to the contract. Remove site enclosure fence or safety barricade when the need has ended.

### 3.5 SITE CLEANING AND MAINTENANCE

- A. Perform an inspection of the site, including areas outside of the Site boundaries, with the Owner's Representative present, prior to the start of any Work, to determine the existing conditions.
- B. The Contractor shall take all necessary precautions to prevent the spreading of dirt and dust throughout the area of the Work. During demolition and all other work, take to contain dust and other debris from the Work within the limits of the site under the Contractor's control. Promptly clean up all dirt, dust and debris escaping from the work areas or dropped from vehicles traveling to and from the Work.
1. Equip all vehicles used for transportation to, and removal of material from the site with covers, maintained in good condition, adequate to contain dust and debris within lawful acceptable limits.
  2. Provide facilities for preventing the spread of objectionable matter outside the site areas through washing of vehicles and vehicle wheels; decontamination of vehicles transporting hazardous waste containing materials such as asbestos, lead, or other matter; and by all other means necessary.
  3. When excavation begins, provide a 24' x 60', or larger as indicated, tire cleaning surface at each construction entrance. Provide adequate drainage and maintain surface for the duration of construction.
- C. Prior to Substantial Completion, remove all spots, stains, dirt and dust from all surfaces, including areas within other buildings and any portion of property of others, which were the result of the work of this project, to the satisfaction of the Architect.
1. Requirements for final cleaning are contained in Division 01 Section, "Closeout Procedures."
- D. Repair any damage to the building, site, the property of others or the Owner's equipment caused by the Contractor or its Subcontractors, at no additional cost to the Owner.

### 3.6 OPERATION, TERMINATION, AND REMOVAL

- A. Supervision: Enforce strict discipline in use of temporary facilities. Limit availability of temporary facilities to essential and intended uses to minimize waste and abuse.

- B. Maintenance: Maintain facilities in good operating condition until removal. Protect from damage by freezing temperatures and similar elements.
  - 1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.
  - 2. Protection: Prevent water filled piping from freezing. Maintain markers for underground lines. Protect from damage during excavation operations.
- C. Temporary Facility Changeover: Do not change over from using temporary security and protection facilities to permanent facilities until Substantial Completion.
- D. Termination and Removal: Unless the Architect requests that it be maintained longer, remove each temporary facility when the need has ended, or when replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with the temporary facility. Repair damaged Work, clean exposed surfaces and replace construction that cannot be satisfactorily repaired.
  - 1. Materials and facilities that constitute temporary facilities are property of the Contractor, with the exception of furniture and equipment provided for the Owner's field office, which are the property of the Owner. The Owner reserves the right to take possession of Project identification signs.
  - 2. At Substantial Completion, clean and renovate existing and new permanent facilities that have been used during the construction period, including but not limited to:
    - a. Replace significantly worn parts and parts that have been subject to unusual operating conditions.
    - b. Replace lamps that are burned out or noticeably dimmed by substantial hours of use.
- E. As a condition of the Architect's certification of Substantial Completion, restore site areas of the site damaged by work under this Contract to their condition existing at the start of the work, unless otherwise directed by the Architect.

END OF SECTION 01 50 00

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**



## **SECTION 01 56 39 – TEMPORARY TREE AND PLANT PROTECTION**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### **1.2 SUMMARY**

- A. This Section includes the specific protection, fertilization, and trimming of trees that interfere with, or are affected by, execution of the Work, whether temporary or new construction.
- B. Related Sections include the following:
  - 1. Division 01 Section "Summary of Work" for limits placed on Contractor's use of the site.
  - 2. Division 31 Section "Site Clearing" for temporary tree protection, removal limits of trees, shrubs, and other plantings affected by new construction.
  - 3. Division 31 Section "Earth Moving" for site excavation, backfilling, compacting and grading requirements, and soil materials.

#### **1.3 DEFINITIONS**

- A. Tree Protection Zone: Area surrounding individual trees or groups of trees to remain during construction, and defined by the drip line of individual trees or the perimeter drip line of groups of trees, unless otherwise indicated.

#### **1.4 SUBMITTALS**

- A. Product Data: For each type of product indicated.
- B. Qualification Data: For firms and persons specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include lists of completed projects with project names and addresses, names and addresses of architects and owners, and other information specified.
- C. Certification from a qualified arborist that trees indicated to remain have been protected during construction according to recognized standards and that trees were promptly and properly treated and repaired when damaged.
- D. Maintenance Recommendations from a qualified arborist for care and protection of trees affected by construction during and after completing the Work.

1.5 QUALITY ASSURANCE

- A. Arborist Qualifications: An arborist certified by the International Society of Arboriculture or licensed in the jurisdiction where Project is located.
- B. Tree Pruning Standards: Comply with ANSI A300, "Trees, Shrubs, and Other Woody Plant Maintenance--Standard Practices," unless more stringent requirements are indicated.
- C. Preconstruction Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Meetings."
  - 1. Before starting tree protection and trimming, meet with representatives of authorities having jurisdiction, Owner, Architect, consultants, and other concerned entities. Review tree protection and trimming procedures and responsibilities. Notify participants at least three working days before convening conference. Record discussions and agreements and furnish a copy to each participant.

PART 2 - PRODUCTS

- 2.1 DRAINAGE FILL: Selected crushed stone, or crushed or uncrushed gravel, washed, ASTM D 448, Size 24, with 90 to 100 percent passing a 2-1/2-inch sieve and not more than 10 percent passing a 3/4-inch sieve.
- 2.2 TOPSOIL: Conform to Division 32 Section "Turf and Grasses".
- 2.3 FILTER FABRIC: Refer to Division 31, Section "Earth Moving", "Drainage Fabric" paragraph.
- 2.4 FERTILIZER
  - A. The fertilizer shall be injected into the soil as an aqueous suspension or solution.
  - B. The fertilizer shall contain nitrogen, phosphorus and potassium in a 3:1:1 ratio. (Three times as much nitrogen as phosphorus and potassium). Suitable analysis would include 28-9-9, 18-6-6 or 12-4-4.
  - C. At least 75% of the nitrogen in the fertilizer shall be derived from a slow release source such as Ureaform Sulfur coated Urea or IBDU.
  - D. The salt index of the fertilizer shall not exceed 35.
- 2.5 SAND: Refer to Division 31, Section "Earth Moving."
- 2.6 PERLITE: Horticultural, inorganic perlite.

### PART 3 - EXECUTION

#### 3.1 PREPARATION

- A. Safety Barricade: Install safety barricade located as indicated or outside the drip line of trees to protect remaining vegetation from construction damage. Refer to Division 31, Section "Site Clearing" of this Specification.
- B. Protect tree root systems from damage due to noxious materials caused by runoff or spillage while mixing, placing, or storing construction materials. Protect root systems from flooding, eroding, or excessive wetting caused by dewatering operations.
- C. Do not store construction materials, debris, or excavated material within the drip line of remaining trees. Do not permit vehicles or foot traffic within the drip line; prevent soil compaction over root systems.
- D. Do not allow fires under or adjacent to remaining trees or other plants.

#### 3.2 EXCAVATION

- A. Do not excavate within drip line of trees, unless otherwise indicated.
- B. Where excavation for new construction is required within drip line of trees, hand clear and excavate to minimize damage to root systems. Use narrow-tine spading forks and comb soil to expose roots.
  - 1. Relocate roots in backfill areas where possible. If encountering large, main lateral roots, expose roots beyond excavation limits as required to bend and relocate them without breaking. If encountered immediately adjacent to location of new construction and relocation is not practical, cut roots approximately 3 inches back from new construction.
  - 2. Do not allow exposed roots to dry out before placing permanent backfill. Provide temporary earth cover or pack with peat moss and wrap with burlap. Water and maintain in a moist condition. Temporarily support and protect roots from damage until they are permanently relocated and covered with soil.
- C. Where utility trenches are required within drip line of trees, tunnel under or around roots by drilling, auger boring, pipe jacking, or digging by hand.
  - 1. Root Pruning: Do not cut main lateral roots or taproots; cut only smaller roots that interfere with installation of utilities. Cut roots with sharp pruning instruments; do not break or chop.

#### 3.3 REGRADING

- A. Grade Lowering: Where new finish grade is indicated below existing grade around trees, slope grade beyond drip line of trees. Maintain existing grades within drip line of trees.

- B. Minor Fill: Where existing grade is 6 inches or less below elevation of finish grade, fill with topsoil. Place topsoil in a single uncompacted layer and hand grade to required finish elevations.
- C. Moderate Fill: Where existing grade is more than 6 inches, but less than 12 inches, below elevation of finish grade, place drainage fill, filter fabric, and topsoil on existing grade as follows:
  - 1. Carefully place drainage fill against tree trunk or restraint and extend to dripline on all sides. Depth – typical 8”.
  - 2. Place filter fabric with edges overlapping 6 inches minimum.
  - 3. Place fill layer of topsoil to finish grade. Do not compact drainage fill or topsoil. Hand grade to required finish elevations.

### 3.4 TREE PRUNING AND FERTILIZATION

- A. Prune and fertilize all designated trees and shrubs.
- B. Prune to compensate for root loss caused by damaging or cutting root system.
- C. Pruning Standards: Prune trees according to ANSI A300 and National Arborists Association as follows, to remove dead, diseased, decayed and obviously weak branches.
  - 1. Type of Pruning: Crown cleaning and thinning (Class II), and crown raising, where designated branches are to be removed to provide additional head room.
- D. Cut branches with sharp pruning instruments; do not break or chop.
- E. All designated trees are to be pruned and fertilized. Fertilizer rates are based on the nitrogen content of the fertilizer.

Determine fertilizer rates by the crown spread technique – based on the soil surface area beneath the crown. Apply 3 lbs. of actual nitrogen per 1000 sq. ft. of soil surface beneath the crown and 3’ beyond the dripline of the tree.

- F. The fertilizer shall be applied using a hydraulic sprayer operating at 200 psi and an injection probe that will permit subsurface placement of the fertilizer solution. Injection holes should be two to three feet apart and 12 inches deep. Begin injection site two to three feet from the trunk and work out to three feet beyond the drip line of the branches.

### 3.5 SOIL ENHANCEMENT

- A. Soil Enhancement shall consist of drilling holes in the soil throughout the tree root zone of existing trees to remain, and backfilling with porous soil amendments to relieve the problems of poorly oxygenated soils and poor soil structure caused by soil compaction.

- B. Vertical holes, 24 inches deep, shall be made in the soil of the tree root zone using a power drill having a 2 inch auger. These holes shall be spaced 3 feet apart in a grid pattern at a point starting 2 feet away from the trunk base to 10 feet beyond the dripline of the tree canopy.
- C. The vertical hole shall be filled to the top with a soil mixture consisting of equal parts (1/3 each) of perlite, sand and screened topsoil. This soil mixture shall be placed in the vertical hole by use of a funnel or by hand raking, whichever is more efficient for the contractor. If the latter is the preferred method however, the contractor shall take precaution against storing the soil amendments for long periods of time (6 hour maximum) on the ground surface within the tree root zone before working it into the vertical holes that were previously made.

### 3.6 TREE REPAIR AND REPLACEMENT

- A. Promptly repair trees damaged by construction operations within 24 hours. Treat damaged trunks, limbs, and roots according to written instructions of the qualified arborist.
- B. Remove and replace dead and damaged trees that the qualified arborist determines to be incapable of restoring to a normal growth pattern.
  - 1. Provide new trees of the same size and species as those being replaced; plant and maintain as specified in Division 32 Section "Planting."
- C. Aerate surface soil, compacted during construction, 10 feet beyond drip line and no closer than 36 inches to tree trunk. Drill 2-inch diameter holes a minimum of 12 inches deep at 24 inches o.c. Backfill holes with an equal mix of augured soil and sand.

### 3.7 DISPOSAL OF WASTE MATERIALS

- A. Burning is not permitted.
- B. Disposal: Remove excess excavated material, displaced trees, and excess chips from Owner's property.

END OF SECTION 01 56 39

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

## SECTION 01 60 00 - PRODUCT REQUIREMENTS

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### 1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; product substitutions; and comparable products.
- B. Related Sections include the following:
  - 1. Division 01 Section "References" for applicable industry standards for products specified.
  - 2. Division 01 Section "Closeout Procedures" for submitting warranties for Contract closeout.
  - 3. Divisions 02 through 33 Sections for specific requirements for warranties on products and installations specified to be warranted.

#### 1.3 DEFINITIONS

- A. Products: Items purchased for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.
  - 1. Named Products: Items identified by manufacturer's product name, including make or model number or other designation shown or listed in manufacturer's published product literature that is current as of date of the Contract Documents.
  - 2. New Products: Items that have not previously been incorporated into another project or facility, except that products consisting of recycled-content materials are allowed, unless explicitly stated otherwise. Products salvaged or recycled from other projects are not considered new products.
  - 3. Comparable Product: Product that is demonstrated and approved through submittal process to have the indicated qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics that equal or exceed those of specified product.
  - 4. Unspecified Products: If an indicated product or item is not specified, the Contractor shall provide the quantity indicated in the Contract Documents. The product or item must be new, of average quality, and fit for the use for which it was intended. If a commercially available manufactured product is not available to fulfill these requirements, the Contractor shall provide a custom fabricated product or item at no

additional cost to the Owner. Submit shop drawings in accordance with Division 01 Section "Submittal Procedures."

- a. This does not apply to unspecified products or items that must be provided in accordance with the manufacturer's recommendation for a complete installation of a specified product or item. Such products or items shall be provided in accordance with the manufacturer's recommendation.
- B. **Basis-of-Design Product Specification:** A specification in which a specific manufacturer's product is named and accompanied by the words "basis-of-design product," including make or model number or other designation, to establish the significant qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics for purposes of evaluating comparable products of additional manufacturers named in the specification.
- C. **Substitutions:** Changes in products, materials, equipment, and methods of construction from those required by the Contract Documents and proposed by Contractor.
  1. **Substitutions for Cause:** Changes proposed by Contractor that are required due to changed Project conditions, such as unavailability of product, regulatory changes, or unavailability of required warranty terms.
  2. **Substitutions for Convenience:** Changes proposed by Contractor or Owner that are not required in order to meet other Project requirements but may offer advantage to Contractor or Owner.

#### 1.4 ACTION SUBMITTALS

- A. **Comparable Product Requests:** Submit request for consideration of each comparable product. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
  1. Include data to indicate compliance with the requirements specified in Part 2 "Comparable Products" Article.
  2. **Architect's Action:** If necessary, Architect will request additional information or documentation for evaluation within one week of receipt of a comparable product request. Architect will notify Contractor of approval or rejection of proposed comparable product request within 15 days of receipt of request, or seven days of receipt of additional information or documentation, whichever is later.
    - a. **Form of Approval:** As specified in Division 01 Section "Submittal Procedures."
- B. **Equal Product Requests for unnamed Products:** Submit request for consideration of each comparable product. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
  1. **Equal Product Request Form:** Use facsimile of form for Substitution requests provided at end of Section.
  2. Comply with requirements in "Substitution Requests" article.



- C. Basis-of-Design Product Specification Submittal: Comply with requirements in Division 01 Section "Submittal Procedures." Show compliance with requirements.

## 1.5 SUBSTITUTION REQUESTS

- A. Substitution Requests: Submit three copies of each request for consideration. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
1. Substitution Request Form: Use facsimile of form provided at end of Section.
  2. Documentation: Show compliance with requirements for substitutions and the following, as applicable:
    - a. Statement indicating why specified material or product cannot be provided.
    - b. Coordination information, including a list of changes or modifications needed to other parts of the Work and to construction performed by Owner and separate contractors, that will be necessary to accommodate proposed substitution.
    - c. Detailed comparison of significant qualities of proposed substitution with those of the Work specified. Significant qualities may include attributes such as performance, weight, size, durability, visual effect, and specific features and requirements indicated.
      - 1) Format detailed comparison on letter-size paper with a two-column comparison; the specified product on the left side, the proposed substitution on the right. Include all performance criteria of the specified product regardless if no corresponding data is available for the proposed substitution.
    - d. Product Data, including drawings and descriptions of products and fabrication and installation procedures.
    - e. Samples, where applicable or requested.
    - f. List of similar installations for completed projects with project names and addresses and names and addresses of architects and owners.
    - g. Material test reports from a qualified testing agency indicating and interpreting test results for compliance with requirements indicated.
    - h. Research/evaluation reports evidencing compliance with building code in effect for Project, from a model code organization acceptable to authorities having jurisdiction.
    - i. Detailed comparison of Contractor's Construction Schedule using proposed substitution with products specified for the Work, including effect on the overall Contract Time. If specified product or method of construction cannot be provided within the Contract Time, include letter from manufacturer, on manufacturer's letterhead, stating lack of availability or delays in delivery.
    - j. Cost information, including a proposal of change, if any, in the Contract Sum.
    - k. Contractor's certification that proposed substitution complies with requirements in the Contract Documents and is appropriate for applications indicated.
    - l. Contractor's waiver of rights to additional payment or time that may subsequently become necessary because of failure of proposed substitution to produce indicated results.

3. Architect's Action: If necessary, Architect will request additional information or documentation for evaluation within 7 days of receipt of a request for substitution. Architect will notify Contractor of acceptance or rejection of proposed substitution within 15 days of receipt of request, or 7 days of receipt of additional information or documentation, whichever is later.
  - a. Form of Acceptance: As specified in Division 01 Section "Submittal Procedures".

#### 1.6 QUALITY ASSURANCE

- A. Compatibility of Options: If Contractor is given option of selecting between two or more products for use on Project, product selected shall be compatible with products previously selected, even if previously selected products were also options.
  1. The Contractor is responsible for providing compatible products and construction methods.
  2. If a dispute arises over concurrently selectable but incompatible products, Architect will determine which products shall be used.
- B. Compatibility of Substitutions: Investigate and document compatibility of proposed substitution with related products and materials. Engage a qualified testing agency to perform compatibility tests recommended by manufacturers.
- C. Coordination: Revise or adjust affected work as necessary to integrate work of the approved substitutions.

#### 1.7 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft. Comply with manufacturer's written instructions.
- B. Delivery and Handling:
  1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.
  2. Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other losses.
  3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
  4. Inspect products on delivery to ensure compliance with the Contract Documents and to ensure that products are undamaged and properly protected.
- C. Storage:
  1. Store products to allow for inspection and measurement of quantity or counting of units.
  2. Store materials in a manner that will not endanger Project structure.

3. Store products that are subject to damage by the elements, under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation.
4. Store cementitious products and materials on elevated platforms.
5. Store foam plastic from exposure to sunlight, except to extent necessary for period of installation and concealment.
6. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
7. Protect stored products from damage and liquids from freezing.
8. Protect construction materials from contamination and pollution from contact with construction dust, debris, fumes, solvents, and other environmentally polluting materials.
9. Provide a secure location and enclosure at Project site for storage of materials and equipment by Owner's construction forces. Coordinate location with Owner.

## 1.8 PRODUCT WARRANTIES

- A. Warranties specified in other Sections shall be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on product warranties do not relieve Contractor of obligations under requirements of the Contract Documents.
  1. Manufacturer's Warranty: Preprinted written warranty published by individual manufacturer for a particular product and specifically endorsed by manufacturer to Owner.
  2. Special Warranty: Written warranty required by or incorporated into the Contract Documents, either to extend time limit provided by manufacturer's warranty or to provide more rights for Owner.
  3. Warranty Period: All warranty periods are required to commence on the date of Substantial Completion regardless of manufacturer's limitations. The Contractor is responsible to purchase an extended warranty as required.
- B. Special Warranties: Prepare a written document that contains appropriate terms and identification, ready for execution. Submit a draft, for approval by the Architect, before final execution.
  1. Manufacturer's Standard Form: Modified to include Project-specific information and properly executed.
  2. Specified Form: When specified forms are included with the Specifications, prepare a written document using appropriate form properly executed.
  3. Refer to Divisions 02 through 48 Sections for specific content requirements and particular requirements for submitting special warranties.
- C. Warranty Requirements: When work covered by a warranty has failed and has been corrected by replacement or rebuilding, reinstate the warranty by written endorsement. The reinstated warranty shall be equal to the original warranty with an equitable adjustment for depreciation.
  1. Upon determination by Architect that work covered by a warranty has failed, replace or rebuild the work to an acceptable condition, in compliance with the Contract Documents.

2. Remove and replace construction that has been damaged as a result of failed or damaged warranted construction, or must be removed and replaced to provide access for correction of warranted construction.
- D. List of Warranties: Provide warranties for products and installations as specified, including but not limited to the following:
  1. EPDM Roofing: Division 07 Section "Ethylene-Propylene-Diene-Monomer (EPDM) Roofing."
  2. Caulking: Division 07 Section "Joint Sealants".
- E. Submittal Time: Comply with requirements in Division 01 Section "Closeout Procedures."

## PART 2 - PRODUCTS

### 2.1 PRODUCT SELECTION PROCEDURES

- A. General Product Requirements: Provide products that comply with the Contract Documents, that are undamaged and, unless otherwise indicated, that are new at time of installation.
  1. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.
  2. Standard Products: If available, and unless custom products or nonstandard options are specified, provide standard products of types that have been produced and used successfully in similar situations on other projects.
  3. Owner reserves the right to limit selection to products with warranties not in conflict with requirements of the Contract Documents.
  4. Where products are accompanied by the term "as selected," Architect will make selection.
  5. Where products are accompanied by the term "match sample," sample to be matched is Architect's.
  6. Descriptive, performance, and reference standard requirements in the Specifications establish "salient characteristics" of products.
  7. Or Equal: For products specified by name and accompanied by the term "or equal," or "or approved equal," or "or approved," comply with requirements in "Comparable Products" Article to obtain approval for use of an unnamed product.
- B. Product Selection Procedures:
  1. Product: Where Specifications name a single product and manufacturer, provide the named product that complies with requirements.
  2. Manufacturer/Source: Where Specifications name a single manufacturer or source, provide a product by the named manufacturer or source that complies with requirements.
  3. Products: Where Specifications include a list of names of both products and manufacturers, provide one of the products listed that complies with requirements.
    - a. Nonrestricted List: Where Specifications include a list of names of both available manufacturers and products, provide one of the products listed, or an unnamed

product, that complies with requirements. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product.

4. Manufacturers: Where Specifications include a list of manufacturers' names, provide a product by one of the manufacturers listed that complies with requirements.
    - a. Nonrestricted List: Where Specifications include a list of available manufacturers, provide a product by one of the manufacturers listed, or a product by an unnamed manufacturer, that complies with requirements. Comply with requirements in "Comparable Products" Article for consideration of an unnamed manufacturer's product.
  5. Basis-of-Design Product: Where Specifications name a product, or refer to a product indicated on Drawings, and include a list of manufacturers, provide the specified or indicated product or a comparable product by one of the other named manufacturers. Drawings and Specifications indicate sizes, profiles, dimensions, and other characteristics that are based on the product named. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product by one of the other named manufacturers.
- C. Visual Matching Specification: Where Specifications require matching an established Sample, select a product that complies with requirements and matches Architect's sample. Architect's decision will be final on whether a proposed product matches.
1. If no product available within specified category matches and complies with other specified requirements, comply with provisions in Part 2 "Product Substitutions" Article for proposal of product.
- D. Visual Selection Specification: Where Specifications include the phrase "as selected from manufacturer's colors, patterns, textures" or a similar phrase, select a product that complies with other specified requirements.
1. Standard Range: Where Specifications include the phrase "standard range of colors, patterns, textures" or similar phrase, Architect will select color, pattern, density, or texture from manufacturer's product line that does not include premium items.
  2. Full Range: Where Specifications include the phrase "full range of colors, patterns, textures" or similar phrase, Architect will select color, pattern, density, or texture from manufacturer's product line that includes both standard and premium items.

## 2.2 SUBSTITUTIONS

- A. Substitutions for Cause: Submit requests for substitution immediately on discovery of need for change, but not later than 15 days prior to time required for preparation and review of related submittals.
1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:

- a. Requested substitution is consistent with the Contract Documents and will produce indicated results.
  - b. Substitution request is fully documented and properly submitted.
  - c. Requested substitution will not adversely affect Contractor's construction schedule.
  - d. Requested substitution has received necessary approvals of authorities having jurisdiction.
  - e. Requested substitution is compatible with other portions of the Work.
  - f. Requested substitution has been coordinated with other portions of the Work.
  - g. Requested substitution provides specified warranty.
  - h. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.
- B. Substitutions for Convenience: Architect will consider requests for substitution if received within 60 days after the Notice to Proceed.
1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:
    - a. Requested substitution offers Owner a substantial advantage in cost, time, energy conservation, or other considerations, after deducting additional responsibilities Owner must assume. Owner's additional responsibilities may include compensation to Architect for redesign and evaluation services, increased cost of other construction by Owner, and similar considerations.
    - b. Requested substitution does not require extensive revisions to the Contract Documents.
    - c. Requested substitution is consistent with the Contract Documents and will produce indicated results.
    - d. Substitution request is fully documented and properly submitted.
    - e. Requested substitution will not adversely affect Contractor's construction schedule.
    - f. Requested substitution has received necessary approvals of authorities having jurisdiction.
    - g. Requested substitution is compatible with other portions of the Work.
    - h. Requested substitution has been coordinated with other portions of the Work.
    - i. Requested substitution provides specified warranty.
    - j. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.

## 2.3 COMPARABLE PRODUCTS

- A. Conditions for Consideration: Architect will consider Contractor's request for comparable product when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:

1. Evidence that the proposed product does not require extensive revisions to the Contract Documents, that it is consistent with the Contract Documents and will produce the indicated results, and that it is compatible with other portions of the Work.
2. Detailed comparison of significant qualities of proposed product with those named in the Specifications. Significant qualities include attributes such as performance, weight, size, durability, visual effect, and specific features and requirements indicated.
3. Evidence that proposed product provides specified warranty.
4. List of similar installations for completed projects with project names and addresses and names and addresses of architects and owners, if requested.
5. Samples, if requested.

### PART 3 - EXECUTION

#### 3.1 FORMS

A. The following form referenced in this Section is attached:

1. Substitution Request Form, 2 pages.

END OF SECTION 01 60 00

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**



---

**SUBSTITUTION REQUEST****(After the Bidding Phase)**

DATE: \_\_\_\_\_

Page: 1 of 2

---

Project: \_\_\_\_\_

Substitution Request Number: \_\_\_\_\_

\_\_\_\_\_

From: \_\_\_\_\_

To: \_\_\_\_\_

Date: \_\_\_\_\_

\_\_\_\_\_

KBA Project Number: \_\_\_\_\_

Re: \_\_\_\_\_

Contract For: \_\_\_\_\_

---

Specification Title: \_\_\_\_\_

Description: \_\_\_\_\_

Section: \_\_\_\_\_ Page: \_\_\_\_\_

Article/Paragraph: \_\_\_\_\_

---

Proposed Substitution: \_\_\_\_\_

Manufacturer: \_\_\_\_\_ Address: \_\_\_\_\_ Phone: \_\_\_\_\_

Trade Name: \_\_\_\_\_ Model No. \_\_\_\_\_

Installer: \_\_\_\_\_ Address: \_\_\_\_\_ Phone: \_\_\_\_\_

History:  New Product  2-5 years old  5-10 years old  More than 10 years oldDifferences between proposed substitution and specified product: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_ Point-by-point comparative data attached – REQUIRED BY ARCHITECT

---

Reason for not providing specified item: \_\_\_\_\_  
\_\_\_\_\_

Similar Installation:

Project: \_\_\_\_\_ Architect: \_\_\_\_\_

Address: \_\_\_\_\_ Owner: \_\_\_\_\_

\_\_\_\_\_ Date Installed: \_\_\_\_\_

Proposed substitution affects other parts of Work:  No  Yes; Explain: \_\_\_\_\_  
\_\_\_\_\_

Savings to Owner for accepting substitution: \_\_\_\_\_ (\$ \_\_\_\_\_)

Proposed substitution changes Contract Time:  No  Yes [Add] [Deduct] \_\_\_\_\_ days.

---

Supporting Data Attached:  Drawings  Product Data  Samples  Tests  Reports  \_\_\_\_\_

---

# SUBSTITUTION REQUEST

(After the Bidding Phase)

DATE: \_\_\_\_\_

Page: 2 of 2

---

The Undersigned certifies:

- Proposed substitution has been fully investigated and determined to be equal or superior in all respects to specified product.
  - Same warranty will be furnished for proposed substitution as for specified product.
  - Same maintenance service and source of replacement parts, as applicable, is available.
  - Proposed substitution will have no adverse effect on other trades and will not affect or delay progress schedule.
  - Cost data as stated above is complete. Claims for addition costs related to accepted substitution which may subsequently become apparent are to be waived.
  - Proposed substitution does not affect dimensions and functional clearances.
  - Payment will be made for changes to building design, including A/E design, detailing, and construction costs caused by the substitution.
  - Coordination, installation, and changes in the Work as necessary for accepted substitution will be complete in all aspects.
- 

Submitted by: \_\_\_\_\_

Signed by: \_\_\_\_\_

Firm: \_\_\_\_\_

Address: \_\_\_\_\_

Telephone: \_\_\_\_\_

Attachments: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

---

## ARCHITECTS'S REVIEW AND ACTION

- Substitution approved - Make submittals in accordance with Specification Section 01330.
- Substitution approved ad noted - Make submittals in accordance with Specification Section 01330.
- Substitution rejected – Use specified materials.
- Substitution Request received too late – Use specified materials.

Signed by: \_\_\_\_\_ Date: \_\_\_\_\_

---

Additional Comments:  Contractor  Subcontractor  Supplier  Manufacturer  Architect  \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

---

## SECTION 01 73 00 - EXECUTION

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### 1.2 SUMMARY

- A. This Section includes general procedural requirements governing execution of the Work including, but not limited to, the following:
  - 1. General installation of products.
  - 2. Progress cleaning.
  - 3. Protection of installed construction.
  - 4. Correction of the Work.
- B. Related Sections include the following:
  - 1. Division 01 Section "Cutting and Patching" for procedural requirements for cutting and patching necessary for the installation or performance of other components of the Work.
  - 2. Division 01 Section "Closeout Procedures" for final cleaning.

### PART 2 - PRODUCTS (Not Used)

### PART 3 - EXECUTION

#### 3.1 EXAMINATION

- A. Existing Conditions: The existence and location of site improvements, utilities, and other construction indicated as existing are not guaranteed. Before beginning work, investigate and verify the existence and location of mechanical and electrical systems and other construction affecting the Work.
  - 1. Before construction, verify the location and points of connection of utility services.
- B. Existing Utilities: The existence and location of underground and other utilities and construction indicated as existing are not guaranteed. Before beginning sitework, investigate and verify the existence and location of underground utilities and other construction affecting the Work.

1. Before construction, verify the location and invert elevation at points of connection of sanitary sewer, storm sewer, and water-service piping; and underground electrical services.
  2. Furnish location data for work related to Project that must be performed by public utilities serving Project site.
- C. Acceptance of Conditions: Examine substrates, areas, and conditions, with Installer or Applicator present where indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.
1. Written Report: Where a written report listing conditions detrimental to performance of the Work is required by other Sections, include the following:
    - a. Description of the Work.
    - b. List of detrimental conditions, including substrates.
    - c. List of unacceptable installation tolerances.
    - d. Recommended corrections.
  2. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
  3. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
  4. Examine walls, floors, and roofs for suitable conditions where products and systems are to be installed.
  5. Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

### 3.2 PREPARATION

- A. Existing Utility Information: Furnish information to Owner that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Coordinate with authorities having jurisdiction.
- B. Field Measurements: Take field measurements as required to fit the Work properly. Recheck measurements before installing each product. Where portions of the Work are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication. Coordinate fabrication schedule with construction progress to avoid delaying the Work.
- C. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.
- D. Review of Contract Documents and Field Conditions: Immediately on discovery of the need for clarification of the Contract Documents, submit a request for information to Architect. Include a detailed description of problem encountered, together with recommendations.

### 3.3 INSTALLATION

- A. General: Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.
  - 1. Make vertical work plumb and make horizontal work level.
  - 2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
  - 3. Conceal pipes, ducts, and wiring in finished areas, unless otherwise indicated.
  - 4. Maintain minimum headroom clearance of 7'-8" in spaces without a suspended ceiling.
- B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.
- C. Install products at the time and under conditions that will ensure the best possible results. Maintain conditions required for product performance until Substantial Completion.
- D. Conduct construction operations so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy.
- E. Tools and Equipment: Do not use tools or equipment that produce harmful noise levels.
- F. Templates: Obtain and distribute to the parties involved templates for work specified to be factory prepared and field installed. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.
- G. Anchors and Fasteners: Provide anchors and fasteners as required to anchor each component securely in place, accurately located and aligned with other portions of the Work.
  - 1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by Architect.
  - 2. Allow for building movement, including thermal expansion and contraction.
  - 3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.
  - 4. All anchors and fasteners used on the exterior of the building and where dampness and corrosion can reasonably be anticipated to be corrosion resistant.
- H. Joints: Make joints of uniform width. Where joint locations in exposed work are not indicated, arrange joints for the best visual effect. Fit exposed connections together to form hairline joints.
- I. Hazardous Materials: Use products, cleaners, and installation materials that are not considered hazardous.
  - 1. All paint used on products to comply with State of Connecticut regulations controlling the use of volatile organic components. (VOCs).

### 3.4 PROGRESS CLEANING

- A. General: Clean Project site and work areas daily, including common areas. Coordinate progress cleaning for joint-use areas where more than one installer has worked. Enforce requirements strictly. Dispose of materials lawfully.
  - 1. Comply with requirements in NFPA 241 for removal of combustible waste materials and debris.
  - 2. Do not hold materials more than 7 days during normal weather or 3 days if the temperature is expected to rise above 80 deg F.
  - 3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.
- B. Site: Maintain Project site free of waste materials and debris.
- C. Work Areas: Clean areas where work is in progress to the level of cleanliness necessary for proper execution of the Work.
  - 1. Remove liquid spills promptly.
  - 2. Where dust would impair proper execution of the Work, broom-clean or vacuum the entire work area, as appropriate.
- D. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
- E. Exposed Surfaces in Finished Areas: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Substantial Completion.
- F. Waste Disposal: Burying or burning waste materials on-site will not be permitted. Washing waste materials down sewers or into waterways will not be permitted.
- G. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration at Substantial Completion.
- H. Clean and provide maintenance on completed construction as frequently as necessary through the remainder of the construction period. Adjust and lubricate operable components to ensure operability without damaging effects.
- I. Limiting Exposures: Supervise construction operations to assure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period.

### 3.5 STARTING AND ADJUSTING

- A. Start equipment and operating components to confirm proper operation. Remove malfunctioning units, replace with new units, and retest.

- B. Adjust operating components for proper operation without binding. Adjust equipment for proper operation.
- C. Test each piece of equipment to verify proper operation. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
- D. Manufacturer's Field Service: If a factory-authorized service representative is required to inspect field-assembled components and equipment installation, comply with qualification requirements in Division 01 Section "Quality Requirements."

### 3.6 PROTECTION OF INSTALLED CONSTRUCTION

- A. Provide final protection and maintain conditions that ensure installed Work is without damage or deterioration at time of Substantial Completion.
- B. Comply with manufacturer's written instructions for temperature and relative humidity.

### 3.7 CORRECTION OF THE WORK

- A. Repair or remove and replace defective construction. Restore damaged substrates and finishes. Comply with requirements in Division 01 Section "Cutting and Patching."
  - 1. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment.
- B. Restore permanent facilities used during construction to their specified condition.
- C. Remove and replace damaged surfaces that are exposed to view if surfaces cannot be repaired without visible evidence of repair.
- D. Repair components that do not operate properly. Remove and replace operating components that cannot be repaired.
- E. Remove and replace chipped, scratched, and broken glass or reflective surfaces.

END OF SECTION 01 73 00

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**



## SECTION 01 73 29 - CUTTING AND PATCHING

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### 1.2 SUMMARY

- A. This Section includes procedural requirements for cutting and patching.

#### 1.3 DEFINITIONS

- A. Cutting: Penetration of in-place construction with an edged tool or drill to facilitate the removal, installation, modification or performance of other Work, including the removal of debris.
- B. Coring: Penetration of in-place construction with a drill that is designed to make the penetration in a manner such that the core can be removed to facilitate the installation or performance of other Work, including the removal of debris.
- C. Patching: Fitting and repair work required to restore surfaces to original conditions after installation of other Work.

#### 1.4 SUBMITTALS

- A. Cutting and Patching Proposal: Submit a proposal describing procedures at least 10 days before the time cutting and patching will be performed, requesting approval to proceed. Include the following information:
  - 1. Extent: Describe cutting and patching, show how they will be performed, and indicate why they cannot be avoided.
  - 2. Changes to In-Place Construction: Describe anticipated results. Include changes to structural elements and operating components as well as changes in building's appearance and other significant visual elements.
  - 3. Products: List products to be used and firms or entities that will perform the Work.
  - 4. Dates: Indicate when cutting and patching will be performed.
  - 5. Utility Services and Mechanical/Electrical Systems: List services/systems that cutting and patching procedures will disturb or affect. List services/systems that will be relocated and those that will be temporarily out of service. Indicate how long services/systems will be disrupted.
  - 6. Structural Elements: Where cutting and patching involve adding reinforcement to structural elements, submit details and engineering calculations showing integration of reinforcement with original structure.

7. Architect's Approval: Obtain approval of cutting and patching proposal before cutting and patching. Approval does not waive right to later require removal and replacement of unsatisfactory work.

#### 1.5 QUALITY ASSURANCE

- A. Structural Elements: Do not cut and patch structural elements in a manner that could change their load-carrying capacity or load-deflection ratio.
  1. Obtain approval of the cutting and patching proposal before cutting and patching the following structural elements:
    - a. Foundation construction.
    - b. Bearing and retaining walls.
    - c. Structural concrete.
    - d. Lintels.
    - e. Structural decking.
    - f. Miscellaneous structural metals.
    - g. Exterior and/or interior masonry wall construction.
- B. Operational Elements: Do not cut and patch operating elements and related components in a manner that results in reducing their capacity to perform as intended or that results in increased maintenance or decreased operational life or safety. Operating elements include the following:
  1. Primary operational systems and equipment.
  2. Air or smoke barriers.
  3. Fire-suppression systems.
  4. Mechanical systems piping and ducts.
  5. Control systems.
  6. Communication systems.
  7. Conveying systems.
  8. Electrical wiring systems.
- C. Miscellaneous Elements: Do not cut and patch miscellaneous elements or related components in a manner that could change their load-carrying capacity, that results in reducing their capacity to perform as intended, or that results in increased maintenance or decreased operational life or safety. Miscellaneous elements include the following:
  1. Water, moisture, or vapor barriers.
  2. Membranes and flashings.
  3. Exterior curtain-wall construction.
  4. Equipment supports.
  5. Piping, ductwork, vessels, and equipment.
  6. Noise- and vibration-control elements and systems.
  7. Roofing Systems.
- D. Visual Requirements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch construction exposed on the exterior or in occupied spaces in a manner that would, in Architect's opinion, reduce the building's

aesthetic qualities. Remove and replace construction that has been cut and patched in a visually unsatisfactory manner.

- E. Cutting and Patching Conference: Before proceeding, meet at Project site with parties involved in cutting and patching, including mechanical and electrical trades. Review areas of potential interference and conflict. Coordinate procedures and resolve potential conflicts before proceeding.

## 1.6 WARRANTY

- A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during cutting and patching operations, by methods and with materials so as not to void existing warranties.

## PART 2 - PRODUCTS

### 2.1 MATERIALS

- A. General: Comply with requirements specified in other Sections.
- B. In-Place Materials: Use materials identical to in-place materials. For exposed surfaces, use materials that visually match in-place adjacent surfaces to the fullest extent possible.
  - 1. If identical materials are unavailable or cannot be used, use materials that, when installed, will match the visual and functional performance of in-place materials.

## PART 3 - EXECUTION

### 3.1 EXAMINATION

- A. Examine surfaces to be cut and patched and conditions under which cutting and patching are to be performed.
  - 1. Compatibility: Before patching, verify compatibility with and suitability of substrates, including compatibility with in-place finishes or primers.
  - 2. Proceed with installation only after unsafe or unsatisfactory conditions have been corrected.

### 3.2 PREPARATION

- A. Temporary Support: Provide temporary support of Work to be cut.
- B. Protection: Protect in-place construction during cutting and patching to prevent damage. Provide protection from adverse weather conditions for portions of Project that might be exposed during cutting and patching operations.

- C. Adjoining Areas: Avoid interference with use of adjoining areas or interruption of free passage to adjoining areas.
- D. Existing Utility Services and Mechanical/Electrical Systems: Where existing services/systems are required to be removed, relocated, or abandoned, bypass such services/systems before cutting to minimize interruption to occupied areas.

### 3.3 PERFORMANCE

- A. General: Employ skilled workers to perform cutting and patching. Proceed with cutting and patching at the earliest feasible time, and complete without delay.
  - 1. Cut in-place construction to provide for installation of other components or performance of other construction, and subsequently patch as required to restore surfaces to their original condition.
- B. Cutting and Coring: Cut and core in-place construction by sawing, drilling, breaking, chipping, grinding, and similar operations, including excavation, using methods least likely to damage elements retained or adjoining construction. If possible, review proposed procedures with original Installer; comply with original Installer's written recommendations.
  - 1. In general, use hand or small power tools designed for sawing and grinding, not hammering and chopping. Cut holes and slots as small as possible, neatly to size required, and with minimum disturbance of adjacent surfaces. Temporarily cover openings when not in use.
  - 2. Finished Surfaces: Cut or drill from the exposed or finished side into concealed surfaces.
  - 3. Concrete and Masonry: Cut using a cutting machine, such as an abrasive saw or a diamond-core drill.
  - 4. Mechanical and Electrical Services: Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit to prevent entrance of moisture or other foreign matter after cutting.
  - 5. Proceed with patching after construction operations requiring cutting are complete.
  - 6. Where existing walls, floors, and ceilings are to remain, but portions must be removed for the demolition, installation, or modification of plumbing, HVAC, and electrical equipment the existing walls, floors, and ceilings shall be patched flush with existing surfaces and shall maintain all ratings. The Contractor and Subcontractors are responsible to review Plumbing, HVAC, and Electrical Drawings in all locations where walls, floors, and ceilings are to remain to verify the extent of work required.
- C. Patching: Patch construction by filling, repairing, refinishing, closing up, and similar operations following performance of other Work. Patch with durable seams that are as invisible as possible. Provide materials and comply with installation requirements specified in other Sections.
  - 1. Inspection: Where feasible, test and inspect patched areas after completion to demonstrate integrity of installation.
  - 2. Exposed Finishes: Restore exposed finishes of patched areas and extend finish restoration into retained adjoining construction in a manner that will eliminate evidence of patching and refinishing.

- a. Clean piping, conduit, and similar features before applying paint or other finishing materials.
  - b. Restore damaged pipe covering to its original condition.
3. Exterior Building Enclosure: Patch components in a manner that restores enclosure to a weathertight condition.
- D. Cleaning: Clean areas and spaces where cutting and patching are performed. Completely remove paint, mortar, oils, putty, and similar materials.

END OF SECTION 01 73 29

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

## SECTION 01 77 00 - CLOSEOUT PROCEDURES

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### 1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for contract closeout, including, but not limited to, the following:
  - 1. Inspection procedures.
  - 2. Warranties.
  - 3. Final cleaning.
- B. Related Sections include the following:
  - 1. Division 01 Section "Execution" for progress cleaning of Project site.
  - 2. Division 01 Section "Operation and Maintenance Data" for operation and maintenance manual requirements.
  - 3. Division 01 Section "Payment Procedures" for requirements for Applications for Payment for Substantial and Final Completion.
  - 4. Division 01 Section "Project Record Documents" for submitting Record Drawings, Record Specifications, and Record Product Data.
  - 5. Divisions 02 through 33 Sections for specific closeout and special cleaning requirements for the Work in those Sections.

#### 1.3 SUBSTANTIAL COMPLETION

- A. Preliminary Procedures: Before requesting inspection for determining date of Substantial Completion, complete the following. List items below that are incomplete in request.
  - 1. Prepare a list of items to be completed and corrected (punch list), the value of items on the list, and reasons why the Work is not complete.
  - 2. Advise Owner of pending insurance changeover requirements.
  - 3. Submit specific warranties, workmanship bonds, maintenance service agreements, final certifications, and similar documents.
  - 4. Obtain and submit releases permitting Owner unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, and similar releases.
  - 5. Prepare and submit Project Record Documents, operation and maintenance manuals, Final Completion construction photographs and photographic negatives, damage or settlement surveys, and similar final record information.

6. Deliver tools, spare parts, extra materials, and similar items to location designated by Owner. Label with manufacturer's name and model number where applicable.
7. Complete startup testing of systems.
8. Submit test/adjust/balance records.
9. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements.
10. Advise Owner of changeover in heat and other utilities.
11. Submit changeover information related to Owner's occupancy, use, operation, and maintenance.
12. Complete final cleaning requirements, including touchup painting.
13. Touch up and otherwise repair and restore marred exposed finishes to eliminate visual defects.
14. Submit list of subcontractors, service providers, and principal vendors including contact information where they can be reached for emergency service.

B. Inspection: Submit a written request for inspection for Substantial Completion. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare the Certificate of Substantial Completion after inspection or will notify Contractor of items, either on Contractor's list or additional items identified by Architect, that must be completed or corrected before certificate will be issued.

1. Reinspection: Within 30 days of original request for inspection, request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.
2. Results of completed inspection will form the basis of requirements for Final Completion.

#### 1.4 FINAL COMPLETION

A. Preliminary Procedures: Before requesting final inspection for determining date of Final Completion, and within 60 days of issuance of Certificate of Substantial Completion, complete the following:

1. Submit a final Application for Payment according to Division 01 Section "Payment Procedures."
2. Submit certified copy of Architect's Substantial Completion inspection list of items to be completed or corrected (punch list), endorsed and dated by Architect. The certified copy of the list shall state that each item has been completed or otherwise resolved for acceptance.
3. Submit evidence of final, continuing insurance coverage complying with insurance requirements.
4. Submit pest-control final inspection report and warranty.
5. Instruct Owner's personnel in operation, adjustment, and maintenance of products, equipment, and systems. Submit demonstration and training videotapes.

B. Inspection: Submit a written request for final inspection for acceptance. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare a final Certificate for Payment after inspection or will notify Contractor of construction that must be completed or corrected before certificate will be issued.



1. Reinspection: Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.

#### 1.5 LIST OF INCOMPLETE ITEMS (PUNCH LIST)

- A. Preparation: Submit three copies of list. Include name and identification of each space and area affected by construction operations for incomplete items and items needing correction including, if necessary, areas disturbed by Contractor that are outside the limits of construction.
  1. Organize list of spaces in sequential order, starting with exterior areas first and proceeding from lowest floor to highest floor.
  2. Organize items applying to each space by major element, including categories for ceiling, individual walls, floors, equipment, and building systems.
  3. Include the following information at the top of each page:
    - a. Project name.
    - b. Date.
    - c. Name of Architect.
    - d. Name of Contractor.
    - e. Page number; 1 of x.

#### 1.6 WARRANTIES

- A. Submittal Time: Submit written warranties on request of Architect for designated portions of the Work where commencement of warranties other than date of Substantial Completion is indicated.
- B. Schedule of Warranties: Arrange a Schedule of Warranties in columnar format and include the Specification Section number and title, product name or description, and duration of the warranty. Indicate whether the warranty is by Installer, Manufacturer, or both. Under each of these headings, indicate whether the warranty includes labor only, material only, or both labor and material. Whenever there are differing warranty responsibilities between Installer and Manufacturer, list the responsibilities and duration of each separately.
- C. Organize warranty documents into an orderly sequence based on the table of contents of the Project Manual.
  1. Bind warranties and bonds in heavy-duty, 3-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.
  2. Provide heavy paper dividers with plastic-covered tabs for each separate warranty. Mark tab to identify the product or installation. Provide a typed description of the product or installation, including the name of the product and the name, address, and telephone number of Installer.
  3. Identify each binder on the front and spine with the typed or printed title "WARRANTIES," Project name, and name of Contractor.
- D. Provide additional copies of each warranty to include in operation and maintenance manuals.

## PART 2 - PRODUCTS

### 2.1 MATERIALS

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

## PART 3 - EXECUTION

### 3.1 FINAL CLEANING

- A. General: Provide final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.
  - 1. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for entire Project or for a portion of Project:
    - a. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
    - b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
    - c. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
    - d. Remove tools, construction equipment, machinery, and surplus material from Project site.
    - e. Remove snow and ice to provide safe access to building.
    - f. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
    - g. Leave Project clean and ready for occupancy.
- C. Comply with safety standards for cleaning. Do not burn waste materials. Do not bury debris or excess materials on Owner's property. Do not discharge volatile, harmful, or dangerous materials into drainage systems. Remove waste materials from Project site and dispose of lawfully.

END OF SECTION 01 77 00

## **SECTION 01 78 23 - OPERATION AND MAINTENANCE DATA**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### **1.2 SUMMARY**

- A. This Section includes administrative and procedural requirements for preparing operation and maintenance manuals, including the following:
  - 1. Maintenance manuals for the care and maintenance of products, materials, and finishes, systems and equipment.
- B. Related Sections include the following:
  - 1. Division 01 Section "Submittal Procedures" for submitting copies of submittals for operation and maintenance manuals.
  - 2. Division 01 Section "Closeout Procedures" for submitting operation and maintenance manuals.
  - 3. Division 01 Section "Project Record Documents" for preparing Record Drawings for operation and maintenance manuals.
  - 4. Divisions 02 through 33 Sections for specific operation and maintenance manual requirements for the Work in those Sections.

#### **1.3 SUBMITTALS**

- A. Initial Submittal: Submit two draft copies of the complete operation and maintenance manual for review by the Architect/Engineer and Commissioning Authority at least 45 days after review and approval of equipment shop drawings. Include a complete operation and maintenance directory. Architect will return one copy of draft and mark whether general scope and content of manual are acceptable.
- B. Final Submittal: Submit one copy of corrected manual in final form at least 30 days before requesting inspection for Substantial Completion. Include a complete operation and maintenance directory. Architect will return one copy of draft and mark whether general scope and content of manual are acceptable.
  - 1. Correct or modify each manual to comply with Architect's comments. Submit 3 copies of each corrected manual within 15 days of receipt of Architect's comments.

#### 1.4 COORDINATION

- A. Where operation and maintenance documentation includes information on installations by more than one factory-authorized service representative, assemble and coordinate information furnished by representatives and prepare manuals.

### PART 2 - PRODUCTS

#### 2.1 MANUALS, GENERAL

- A. Organization: Unless otherwise indicated, organize each manual into a separate section for each system and subsystem, and a separate section for each piece of equipment not part of a system. Each manual shall contain the following materials, in the order listed:
  - 1. Title page.
  - 2. Table of contents.
  - 3. Manual contents.
- B. Title Page: Enclose title page in transparent plastic sleeve. Include the following information:
  - 1. Subject matter included in manual.
  - 2. Name and address of Project.
  - 3. Name and address of Owner.
  - 4. Date of submittal.
  - 5. Name, address, and telephone number of Contractor.
  - 6. Name and address of Architect.
  - 7. Cross-reference to related systems in other operation and maintenance manuals.
- C. Table of Contents: List each product included in manual, identified by product name, indexed to the content of the volume, and cross-referenced to Specification Section number in Project Manual.
  - 1. If operation or maintenance documentation requires more than one volume to accommodate data, include comprehensive table of contents for all volumes in each volume of the set.
- D. Manual Contents: Organize into sets of manageable size. Arrange contents alphabetically by system, subsystem, and equipment. If possible, assemble instructions for subsystems, equipment, and components of one system into a single binder.
  - 1. Binders: Heavy-duty, 3-ring, vinyl-covered, loose-leaf binders, in thickness necessary to accommodate contents, sized to hold 8-1/2-by-11-inch paper; with clear plastic sleeve on spine to hold label describing contents and with pockets inside covers to hold folded oversize sheets.
    - a. If two or more binders are necessary to accommodate data of a system, organize data in each binder into groupings by subsystem and related components. Cross-reference other binders if necessary to provide essential information for proper operation or maintenance of equipment or system.

- b. Identify each binder on front and spine, with printed title "OPERATION AND MAINTENANCE MANUAL," Project title or name, and subject matter of contents, including Specification Section number. Indicate volume number for multiple-volume sets.
2. Dividers: Heavy-paper dividers with plastic-covered tabs for each section. Mark each tab to indicate contents. Include typed list of products and major components of equipment included in the section on each divider, cross-referenced to Specification Section number and title of Project Manual.
3. Protective Plastic Sleeves: Transparent plastic sleeves designed to enclose diagnostic software diskettes for computerized electronic equipment.
4. Supplementary Text: Prepared on 8-1/2-by-11-inch white bond paper.
5. Drawings: Attach reinforced, punched binder tabs on drawings and bind with text.
  - a. If oversize drawings are necessary, fold drawings to same size as text pages and use as foldouts.
  - b. If drawings are too large to be used as foldouts, fold and place drawings in labeled envelopes and bind envelopes in rear of manual. At appropriate locations in manual, insert typewritten pages indicating drawing titles, descriptions of contents, and drawing locations.

## 2.2 PRODUCT MAINTENANCE MANUAL

- A. Content: Organize manual into a separate section for each product, material, and finish. Include source information, product information, maintenance procedures, repair materials and sources, and warranties and bonds, as described below.
- B. Source Information: List each product included in manual identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual.
- C. Product Information: Include the following, as applicable:
  1. Product name and model number.
  2. Manufacturer's name.
  3. Color, pattern, and texture.
  4. Material and chemical composition.
  5. Reordering information for specially manufactured products.
- D. Maintenance Procedures: Include manufacturer's written recommendations and the following:
  1. Inspection procedures.
  2. Types of cleaning agents to be used and methods of cleaning.
  3. List of cleaning agents and methods of cleaning detrimental to product.
  4. Schedule for routine cleaning and maintenance.
  5. Repair instructions.

- E. Repair Materials and Sources: Include lists of materials and local sources of materials and related services.
- F. Warranties and Bonds: Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds.
  - 1. Include procedures to follow and required notifications for warranty claims.

### PART 3 - EXECUTION

#### 3.1 MANUAL PREPARATION

- A. Product Maintenance Manual: Assemble a complete set of maintenance data indicating care and maintenance of each product, material, and finish incorporated into the Work.
- B. Manufacturers' Data: Where manuals contain manufacturers' standard printed data, include only sheets pertinent to product or component installed. Mark each sheet to identify each product or component incorporated into the Work. If data include more than one item in a tabular format, identify each item using appropriate references from the Contract Documents. Identify data applicable to the Work and delete references to information not applicable.
  - 1. Prepare supplementary text if manufacturers' standard printed data are not available and where the information is necessary for proper operation and maintenance of equipment or systems.
- C. Drawings: Prepare drawings supplementing manufacturers' printed data to illustrate the relationship of component parts of equipment and systems and to illustrate control sequence and flow diagrams. Coordinate these drawings with information contained in Record Drawings to ensure correct illustration of completed installation.
  - 1. Do not use original Project Record Documents as part of operation and maintenance manuals.
- D. Comply with Division 01 Section "Closeout Procedures" for schedule for submitting operation and maintenance documentation.

END OF SECTION 01 78 23

## SECTION 01 78 39 - PROJECT RECORD DOCUMENTS

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### 1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for Project Record Documents, including the following:
  - 1. Record Drawings.
  - 2. Record Specifications.
  - 3. Record Product Data.
  - 4. Final As-Built Survey.
- B. Related Sections include the following:
  - 1. Division 01 Section "Closeout Procedures" for general closeout procedures.
  - 2. Division 01 Section "Operation and Maintenance Data" for operation and maintenance manual requirements.
  - 3. Divisions 02 through 33 Sections for specific requirements for Project Record Documents of the Work in those Sections.

#### 1.3 SUBMITTALS

- A. Record Drawings: Comply with the following:
  - 1. Number of Copies: Submit one hard copy set(s) of marked-up Record Prints.
    - a. Provide one set of electronically scanned, marked-up Record Prints in Portable Document Format (.PDF) on a digital video disk (DVD).
- B. Record Specifications: Submit one copy of Project's Specifications, including addenda and contract modifications.
- C. Record Product Data: Submit one copy of each Product Data submittal.
  - 1. Where Record Product Data is required as part of operation and maintenance manuals, submit marked-up Product Data as an insert in manual instead of submittal as Record Product Data.
- D. Final As-Built Survey: Submit one hard copy set(s) of signed and sealed as-built survey and one AutoCAD format drawing on CD or thumbdrive.

## PART 2 - PRODUCTS

### 2.1 RECORD DRAWINGS

- A. Record Prints: Maintain one set of blue- or black-line white prints of the Contract Drawings and Shop Drawings.
1. Preparation: Mark Record Prints to show the actual installation where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to prepare the marked-up Record Prints.
    - a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
    - b. Accurately record information in an understandable drawing technique.
    - c. Record data as soon as possible after obtaining it. Record and check the markup before enclosing concealed installations.
  2. Content: Types of items requiring marking include, but are not limited to, the following:
    - a. Dimensional changes to Drawings.
    - b. Revisions to details shown on Drawings.
    - c. Depths of foundations below first floor.
    - d. Locations and depths of underground utilities.
    - e. Revisions to routing of piping and conduits.
    - f. Revisions to electrical circuitry.
    - g. Actual equipment locations.
    - h. Duct size and routing.
    - i. Locations of concealed internal utilities.
    - j. Changes made by Change Order or Construction Change Directive.
    - k. Changes made following Architect's written orders.
    - l. Details not on the original Contract Drawings.
    - m. Field records for variable and concealed conditions.
    - n. Record information on the Work that is shown only schematically.
  3. Mark the Contract Drawings or Shop Drawings, whichever is most capable of showing actual physical conditions, completely and accurately. If Shop Drawings are marked, show cross-reference on the Contract Drawings.
  4. Mark record sets with erasable, red-colored pencil. Use other colors to distinguish between changes for different categories of the Work at same location.
  5. Mark important additional information that was either shown schematically or omitted from original Drawings.
  6. Note Construction Change Directive numbers, alternate numbers, Change Order numbers, and similar identification, where applicable.
- B. Format: Identify and date each Record Drawing; include the designation "PROJECT RECORD DRAWING" in a prominent location.
1. Record Prints: Organize Record Prints into manageable sets. Bind each set with durable paper cover sheets. Include identification on cover sheets.



2. Identification: As follows:
  - a. Project name.
  - b. Date.
  - c. Designation "PROJECT RECORD DRAWINGS."
  - d. Name of Architect.

## 2.2 RECORD SPECIFICATIONS

- A. Preparation: Mark Specifications to indicate the actual product installation where installation varies from that indicated in Specifications, addenda, and contract modifications.
  1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
  2. Mark copy with the proprietary name and model number of products, materials, and equipment furnished, including substitutions and product options selected.
  3. Record the name of manufacturer, supplier, Installer, and other information necessary to provide a record of selections made.
  4. For each principal product, indicate whether Record Product Data has been submitted in operation and maintenance manuals instead of submitted as Record Product Data.
  5. Note related Change Orders, Record Product Data, and Record Drawings where applicable.

## 2.3 RECORD PRODUCT DATA

- A. Preparation: Mark Product Data to indicate the actual product installation where installation varies substantially from that indicated in Product Data submittal.
  1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
  2. Include significant changes in the product delivered to Project site and changes in manufacturer's written instructions for installation.
  3. Note related Change Orders, Record Specifications, and Record Drawings where applicable.

## 2.4 MISCELLANEOUS RECORD SUBMITTALS

- A. Assemble miscellaneous records required by other Specification Sections for miscellaneous record keeping and submittal in connection with actual performance of the Work. Bind or file miscellaneous records and identify each, ready for continued use and reference.

## 2.5 FINAL AS-BUILT SURVEY

- A. A final survey of completed work shall be submitted for review and conformance to project plans and specifications. Survey shall include, but is not limited to, grades and contours, physical features such as fencing and gates, netting, court layouts, pavement material locations, underground utilities and drainage, and other features completed as part of the project.

PART 3 - EXECUTION

3.1 RECORDING AND MAINTENANCE

- A. Recording: Maintain one copy of each submittal during the construction period for Project Record Document purposes. Post changes and modifications to Project Record Documents as they occur; do not wait until the end of Project.
- B. Maintenance of Record Documents and Samples: Store Record Documents and Samples in the field office apart from the Contract Documents used for construction. Do not use Project Record Documents for construction purposes. Maintain Record Documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to Project Record Documents for Architect's reference during normal working hours.

END OF SECTION 01 78 39

## **SECTION 02 01 00 - PROTECTION OF EXISTING UTILITIES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### **1.2 ACTION SUBMITTALS (NOT APPLICABLE)**

#### **1.3 SCOPE OF WORK**

- A. Identification and field mark out of all on-site utility lines to remain in operation during construction.
- B. Identification and field mark-out of all off-site utility lines within construction work areas.
- C. Submission of procedures to be used to ensure the safety of the utility.
- D. Conduct test pit excavation at all proposed utility crossings prior to construction, where shown.
- E. Repair of any damage caused during construction operations.
- F. Relocate utilities that are indicated as such.

#### **1.4 RELATED SECTIONS**

- A. Section 312333 - Trench Excavation and Backfill for Utilities

#### **1.5 PROJECT RECORD DOCUMENTS**

- A. Accurately record actual locations of capped utilities and utility lines encountered during construction.
- B. Accurately record actual locations and elevations of existing utilities at proposed utility crossings prior to utility and storm sewer construction. Submit recorded data to Owner’s Engineer for verification of proposed design.

#### **1.6 REGULATORY REQUIREMENTS**

- A. Contractor shall notify all affected utility companies, agencies, authorities, owners, etc. at least 48 hours prior to the commencement of work or as required by each agency and shall comply with their requirements.
- B. Contractor shall contact the “Call Before You Dig” service for an official utility mark out.

PART 2 - PRODUCTS (NOT APPLICABLE)

PART 3 - EXECUTION

3.1 IDENTIFICATION

- A. Prior to commencement of work, contractor shall locate all existing utilities which are to remain in service and/or require relocating during construction as shown on the Contract Drawings. Contractor shall record location, depth from existing grade, size and type of existing utility. If existing utilities are in conflict with proposed improvements shown on the contract drawings, it shall be the responsibility of the contractor to inform the Owner and Owner's Engineer prior to commencement of work to determine alternate resolutions of conflict. Contractor shall take responsibility of utility relocation in the absence of such coordination prior to commencement of work.

3.2 PROTECTION

- A. Flag, barricade or suitably protect existing utilities during construction operations and equipment movement. Install shoring and bracing as required.
- B. Prevent interruption of existing utility service to occupied or used facilities, except when authorized in writing by authorities having jurisdiction.

3.3 REPAIRS

- A. Any damage to existing, operational utilities by the Contractor or his subcontractors during the on-going construction operation shall be immediately repaired to operational standards at the Contractor's expense. If the repairs are not immediately addressed by the Contractor, the utility owner and/or the Owner shall have the right to contract for the repair at the Contractor's expense.

3.4 RELOCATIONS

- A. Where utility lines are designated to be relocated, construct new utilities as shown and in accordance with these specifications and then remove former service to minimize disruption to the best extent practical. This operation shall be coordinated with the appropriate Authorities, as necessary.
- B. Coordinate with the Owner for any necessary shut-offs or temporary disruption to existing services.

3.5 MODIFICATIONS OF EXISTING STRUCTURES

- A. General: The Contractor shall alter, reconstruct and/or convert existing structures where and as shown on the Contract Documents, and/or as approved by the Owner's Engineer. In general, alterations shall be performed with the same type of material used in the original construction unless otherwise indicated on the Contract Documents or approved by the Owner's Engineer.
- B. Damage to Existing Installations: The Contractor shall exercise extreme care during such alteration, reconstruction and/or conversions so as not to damage any portions of the structure

and/or pipe shown to remain. Any such damage shall be repaired by the Contractor at his own expense and to the satisfaction of the Owner's Engineer and Owner of the damaged structure.

- C. All manhole covers, grates, rims, and utility structures to remain shall be adjusted to proposed grade.

END OF SECTION 02 01 00

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

## SECTION 31 10 00 - SITE CLEARING

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### 1.2 SUMMARY

- A. This Section includes the following:
  - 1. Protecting existing trees and vegetation to remain including installation of staging fencing and temporary safety barricade.
  - 2. Removing trees and other vegetation.
  - 3. Clearing and grubbing.
  - 4. Topsoil and subsoil stripping and stockpiling.
  - 5. Removal and delivery of excess soil materials
  - 6. Removing above-grade site improvements and off site disposal.
  - 7. Removal and/or on-site pulverizing of designated pavements.
- B. Related Sections include the following:
  - 1. Division 01 Section "Execution".
  - 2. Division 01 Section "Temporary Facilities and Controls".
  - 3. Division 31 Section "Temporary Tree and Plant Protection".
  - 4. Division 31 Section "Earth Moving".
  - 5. Division 32 Section "Topsoil".
  - 6. Division 32 Section "Turf and Grasses".

#### 1.3 DEFINITIONS

- A. Topsoil: Natural or cultivated surface-soil layer (typically the A horizon) containing organic matter and sand, silt, and clay particles; friable, pervious, and black or a darker shade of brown, gray, or red than underlying subsoil; free of subsoil, clay lumps, gravel, and other objects more than [2 inches] in diameter; and free of weeds, roots, and other deleterious materials.
- B. Subsoil: Naturally occurring weathered moraine material, located immediately under the topsoil and atop the residual moraine material.
- C. Form 816: "Standard Specifications for Roads, Bridges, and Incidental Construction", State of Connecticut, Department of Transportation, Form 816", 2004 edition, with 2005 supplement.

- D. Remove: Detach items from existing construction and legally dispose of them off-site, unless indicated to be removed and salvaged or removed and reinstalled.
- E. Remove and Salvage: Detach items from existing construction and deliver them to Owner.
- F. Remove and Reinstall: Detach items from existing construction, prepare them for reuse, and reinstall them where indicated.
- G. Existing to Remain: Existing items of construction that are not to be removed and that are not otherwise indicated to be removed, removed and salvaged, or removed and reinstalled.

#### 1.4 MATERIALS OWNERSHIP

- A. Except for materials indicated to be stockpiled or to remain Owner's property, cleared and demolished materials shall become Contractor's property and shall be removed from the site.

#### 1.5 SUBMITTALS

- A. Photographs sufficiently detailed, of existing conditions of trees and plantings, adjoining construction, and site improvements that might be misconstrued as damage caused by site clearing.
- B. Record drawings according to Division 1, Section "Project Closeout."
  - 1. Identify and accurately locate capped utilities and other subsurface structural, electrical, and mechanical conditions.
- C. Product data for safety barricade and root inoculant.

#### 1.6 QUALITY ASSURANCE

- A. Preconstruction Conference: Conduct conference at Project site to comply with requirements in Division 1, Section "Project Coordination". Coordinate meeting with project sediment and erosion control requirements.
- B. All work shall comply with all codes, rules, regulations, laws and ordinances for the Borough of Naugatuck, the State of Connecticut, and all other authorities having jurisdiction.

#### 1.7 PROJECT CONDITIONS

- A. Traffic: Minimize interference with adjoining roads, streets, walks, and other adjacent occupied or used facilities during site-clearing operations.
  - 1. Do not close or obstruct streets, walks, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction.
  - 2. Provide alternate routes around closed or obstructed traffic ways if required by authorities having jurisdiction.



- B. Improvements on Adjoining Property: Authority for performing indicated removal and alteration work on property adjoining Owner's property will be obtained by Owner before award of Contract.
  - 1. Peripheral areas outside the Contract limit line shall not be disturbed or used for storing materials.
- C. Salvable Improvements: Carefully remove items indicated to be salvaged and store on Owner's premises where indicated.
- D. Notify utility locator service for area where Project is located before site clearing.
- E. Review and verify all limits or improvements to be removed prior to commencing demolition operations.
- F. Inspection: Verify existing condition of all items scheduled for demolition or removal. The Owner assumes no responsibility for the actual condition of structures or utilities to be demolished. Do not proceed with any work that will result with unsafe conditions causing a continuing or permanent hazard. Ascertain that all work scheduled for demolition can be safely accomplished in a proper time period.
- G. Benchmarks: Protect all survey monuments, benchmarks, and property boundary pins. Replace if destroyed by Contractor's operations. Relocate designated monuments where and as directed by the Borough of Naugatuck. Coordinate and schedule work with Owner.
- H. Permits/Fees: Coordinate with appropriate utility companies and pay any disconnect fees and obtain permits as necessary.
- I. Provide 48 hours notice prior to conducting any site demolition operation.

## PART 2 - PRODUCTS

### 2.1 SOIL MATERIALS

- A. Satisfactory Soil Materials: Requirements for satisfactory soil materials are specified in Division 31, Section "Earth Moving."
  - 1. Obtain approved borrow soil materials off-site when satisfactory soil materials are not available on-site.

### 2.2 SAFETY BARRICADE

- A. The Safety Barricade shall be a temporary, polypropylene construction fence, fully stabilized for UV resistance, with 2 inch by 4.5 inch apertures.
  - 1. Color: Orange, height 4'0".
  - 2. Top tension rope – 3/8" braided nylon/polypropylene rope.

- B. POSTS: Heavy gauge channel steel posts 6'0" long.

### 2.3 ROOT INOCULANT

- A. Inoculant shall be rooting growth hormone containing mycorrhizae.

## PART 3 - EXECUTION

### 3.1 PREPARATION

- A. Protect and maintain benchmarks and survey control points from disturbance during construction.
- B. Provide erosion-control measures to prevent soil erosion and discharge of soil-bearing water runoff or airborne dust to adjacent properties and walkways. [Refer to Division 31, Section "Erosion and Sediment Control.]
- C. Locate and clearly flag all limits of clearing, including trees and vegetation to remain or to be relocated. Place flagging every 25' oc. Review with Landscape Architect, Borough Planning Staff, and Owner.
- D. Protect existing site improvements to remain from damage during construction.
  - 1. Restore damaged improvements to their original condition, as acceptable to the Owner.

### 3.2 TREE PROTECTION

- A. Erect and maintain a safety barricade around drip line of individual trees or around perimeter drip line of groups of trees to remain. Remove fence when construction is complete. Post spacing 6'0". Securely attach fencing to posts, including providing a top tension line, woven through top of fabric.
  - 1. Do not store construction materials, debris, or excavated material within drip line of remaining trees.
  - 2. Do not permit vehicles, equipment, or foot traffic within drip line of remaining trees.
- B. Do not excavate within drip line of trees, unless otherwise indicated.
- C. Where excavation for new construction is required within drip line of trees, hand clear and excavate to minimize damage to root systems. Use narrow-tine spading forks, comb soil to expose roots, and cleanly cut roots as close to excavation as possible.
  - 1. Temporarily support and protect roots from damage until they are permanently relocated and covered with soil.
  - 2. Coat cut faces of roots more than 1-1/2 inches in diameter with emulsified asphalt or other approved coating formulated for use on damaged plant tissues.
  - 3. Cover exposed roots with wet burlap to prevent roots from drying out. Backfill with soil as soon as possible.

- D. Repair or replace trees and vegetation indicated to remain that are damaged by construction operations, in a manner approved by Architect.
  - 1. Employ a qualified arborist, licensed in jurisdiction where Project is located, to submit details of proposed repairs and to repair damage to trees and shrubs.
  - 2. Replace trees that cannot be repaired and restored to full-growth status, as determined by the qualified arborist.

### 3.3 UTILITIES

- A. Contractor to arrange for disconnecting and sealing indicated utilities that serve existing structures before site clearing and demolition.
- B. Cut and cap existing site electrical. Remove poles, light fixtures and wiring within proposed lower parking area as indicated on the drawings. Existing lights to remain and be protected.

### 3.4 CLEARING AND GRUBBING

- A. Remove obstructions, trees, shrubs, grass, and other vegetation to permit installation of new construction. Removal includes digging out stumps and obstructions and grubbing roots. Selectively clear trees and prune branches within 20' of clearing limit line or property line. Pruning to conform to Class III Standards.
  - 1. Do not remove trees, shrubs, and other vegetation indicated to remain or to be relocated.
  - 2. Selectively prune and cut minor roots and branches of trees indicated to remain in a clean and careful manner where such roots and branches obstruct installation of new construction.
  - 3. Completely remove stumps, roots, obstructions, and debris typically extending to a depth of 36 inches below any subgrade.
  - 4. Use only hand methods for grubbing within drip line of remaining trees.
  - 5. Along property lines, notify Architect before beginning clearing operations. Coordinate clearing, grubbing and selective pruning with Architect, to maintain as much existing vegetation as is practical.
- B. Fill depressions caused by clearing and grubbing operations with satisfactory soil material, unless further excavation or earthwork is indicated.
  - 1. Place fill material in horizontal layers not exceeding 8-inch loose depth, and compact each layer to a density equal to adjacent original ground.

### 3.5 TOPSOIL STRIPPING

- A. Prepare areas of existing loam so as to provide clump free topsoil. Remove sod and grass before stripping topsoil.
- B. Strip topsoil materials to whatever depths are encountered in a manner to prevent intermingling with underlying subsoil or other waste materials.

1. Strip surface soil of unsuitable topsoil, including trash, debris, weeds, roots, and other waste materials.
  2. Where trees are indicated to remain, hold stripping a sufficient distance away to prevent damage to the root system.
  3. No topsoil stripping is required where proposed fills are greater than 12' in height.
- C. Stockpile materials away from edge of excavations without intermixing with other soil materials. Grade and shape stockpiles to drain surface water, in locations approved by the Owner and consistent with sediment and erosion control requirements.
1. Do not stockpile topsoil within drip line of remaining trees.
  2. Stockpile surplus topsoil and allow for respreading entire amount of approved-stripped and screened topsoil. Surplus screened and unscreened topsoil remains the property of the Contractor and shall be removed from the site. Contractor shall only screen enough topsoil for completion of the project.

### 3.6 SURFACE, BASE MATERIAL & SUBSOIL STRIPPING

- A. After topsoil is fully stripped, strip existing subsoil in all proposed pavement areas, in areas of shallow cuts, and in areas of shallow (less than 6' height) fills.
- B. Strip subsoil to whatever depths are encountered in a manner to prevent intermingling with topsoil and general fill.
- C. Contractor shall remove and haul/deliver excess suitable surface gravel and subsoil from the lower parking lot area, as well as pavement base soil from the upper parking lot area to the Owner at the following location in the Borough of Naugatuck: Wisteria Drive, Cul De Sac. Coordinate delivery of material with Naugatuck DPW.
- D. Prior to delivery, the Naugatuck DPW shall be notified to review suitability of material. The contractor shall note that significant amounts of asphalt mixed into the base soil will be just cause for unsuitability and in which case shall be legally disposed of off-site by the contractor at no additional expense to owner.

### 3.7 SITE IMPROVEMENTS

- A. Remove existing above- and below-grade improvements as indicated and as necessary to facilitate new construction.
- B. Remove all slabs, paving, curbs, gutters, and all base/subbase material as indicated to full depths encountered, unless specifically noted otherwise.
  1. Unless existing full-depth joints coincide with line of demolition, neatly saw-cut length of existing pavement to remain before removing existing pavement. Saw-cut faces vertically, perpendicular and parallel to direction of traffic.
  2. It is the Contractor's option to pulverize or remove existing pavements from site.
  3. Specific pulverizing equipment must be approved. Thoroughly break up bituminous pavement to maximize aggregate size of 2". Pulverize all pavements to their full depth. Stockpile all pulverized material only in permitted areas. Submit mechanical/sieve

analysis of pulverized/base material. Final pulverized product may be re-used on-site if capable of specified compaction and meeting the requirements of gradation for Form 816, Article M.05.01. If not accepted, remove from site at no additional cost to Owner.

- C. Remove existing site improvements, including pavements fences of various types, and signage.
- D. Relocate stones as required in the upper parking area in order to complete proposed improvements. Coordinate final location with Landscape Architect.

### 3.8 DISPOSAL

- A. Disposal: Remove unsuitable and excess soil material, cleared and grubbed material, obstructions, demolished materials, and waste materials, including trash and debris, and legally dispose of them off Owner's property. No burning or burying on site is permitted.
- B. Accumulation of disposal/waste materials on-site is not permitted.
- C. All pavement demolition material remains the property of the Contractor except as specifically noted to be retained or permitted to be re-used on-site.

### 3.9 MAINTENANCE OF EXISTING SITE AREAS

- A. The Contractor shall maintain all areas within the project limits, for the duration of the contract. This maintenance will include the continuous mowing of undisturbed lawn areas within project limits, as well as the removal of any debris within fenced off areas.

END OF SECTION 31 10 00

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

## SECTION 31 20 00 – EARTH MOVING

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### 1.2 SUMMARY

- A. This Section includes the following:

1. Site excavating, grading, filling, backfilling, compacting, and preparing sub-grades for the entire project including but not limited to: site utility lines and structures, walks, pavements, lawns and plantings.
2. Granular fill course for walks, curbs and other site improvements.
3. Processed aggregate for pavements and other improvements.
4. General fill for establishing project sub-grades.
5. Excavation of rock and/or boulders, including replacement with suitable earthwork materials.
6. Removal of encountered unsatisfactory soils, including lawful off-site disposal and replacement with suitable earthwork fill material.
7. Utility bedding material for site utilities.
8. Construction of stone slope embankment.

- B. Related Sections include the following:

1. Division 01 Section “Unit Prices”
2. Division 01 Section “Temporary Facilities and Controls.”
3. Division 01 Section “Temporary Tree and Plant Protection.”
4. Division 31 Section “Excavation Support and Protection
5. Division 31 Section “Erosion and Sedimentation Control.”
6. Division 31 Section “Trench Excavation and Backfill”.
7. Division 31 Section “Site Clearing”.
8. Division 31 Section “Dewatering”.
9. Division 32 Section “Turf and Grasses”.
10. Division 33 Section “Storm Sewer Systems”

#### 1.3 DEFINITIONS

- A. Backfill: Soil materials used to fill an excavation.

1. Initial Backfill: Backfill placed beside and over pipe in a trench, including haunches to support sides of pipe.
2. Final Backfill: Backfill placed over initial backfill to fill a trench.

- B. Base Course: Layer placed between the subbase course and proposed improvements.

- C. Bedding Course: Layer placed over the excavated subgrade in a trench before laying pipe.
- D. Borrow: Satisfactory soil or earthwork products imported from off-site for use as fill or backfill.
- E. Excavation: Removal of material encountered above subgrade elevations.
  - 1. Additional Excavation: Excavation below subgrade elevations as directed by Architect. Additional excavation and replacement material will be paid for according to Contract provisions for changes in the Work.
  - 2. Mass Excavation: Excavations more than 8 feet in width and pits more than 30 feet in either length or width.
  - 3. Unauthorized Excavation: Excavation below subgrade elevations or beyond indicated dimensions without direction by Architect. Unauthorized excavation, as well as remedial work directed by Architect, shall be without additional compensation.
- F. Fill: Soil materials used to raise existing grades.
- G. Mass Rock or Earth: Excavated material that is greater than 8' in both length and width.
- H. Rock: Excavated rock material in beds, ledges, unstratified masses, and conglomerate deposits that cannot be removed by rock excavating equipment equivalent to the following in size and performance ratings, without systematic drilling, ram hammering, ripping, or blasting, when permitted:
  - 1. Excavation of Footings, Trenches, and Pits: Late-model, track-mounted hydraulic excavator; Caterpillar 325D or equal, equipped with a 42-inch wide, short-tip-radius rock bucket.
  - 2. Mass Excavation: Late-model, track-mounted loader; Caterpillar 963C or equal; or Late-model, track-mounted hydraulic excavator; Caterpillar 325D or equal, equipped with a 42-inch wide, short-tip-radius rock bucket.
- I. Boulder: An excavated, individual rock fragment or natural stone with a volume of 1.5 c.y. to 6 c.y. All boulders exceeding 6 c.y. shall be classified as "rock" and shall fall within "mass" or "trench" subcategory based on definitions in this section. Material classified as "Rock" and excavated and paid for shall not be eligible to be classified as "boulder" for additional payment purposes. All excavated boulder material, to be disposed of on-site, or processed for re-use on-site, is not eligible for compensation under allowance and is part of base bid.
- J. Structures: Retaining walls, tanks, curbs, mechanical and electrical appurtenances, or other man-made stationary features constructed above or below the ground surface.
- K. Subbase Course: Layer placed between the subgrade and base course for pavement or other site improvements.
- L. Subgrade: Surface or elevation remaining after completing excavation, or top surface of a fill or backfill immediately below subbase, drainage fill, or topsoil materials.
- M. Trench Rock or Earth: Excavated material from trench excavations that is less than 8' (eight feet) in either length or width.



- N. Utilities include on-site underground pipes, conduits, ducts, and cables, as well as underground services within buildings.
- O. Form 816: “Standard Specifications for Roads, Bridges and Incidental Construction”, State of Connecticut, Department of Transportation, Form 816, 2004 edition, with 2005 supplement.
- P. Unsatisfactory/Unsuitable Soils: Any material generated, excavated and/or collected by earth moving activities or other contract work that does not meet any of the product specifications contained in contract documents.

#### 1.4 SUBMITTALS

- A. General: Submit the following according to the Conditions of the Contract and Division 1 Specifications Sections.
- B. Product Data: For the following:
  - 1. Each type of plastic warning tape.
  - 2. Drainage fabric.
  - 3. Separation fabric.
- C. Samples: For the following:
  - 1. 50-lb samples, sealed in airtight containers, of each proposed soil material from on-site or borrow sources, for Owner’s independent laboratory testing agency. Samples shall be delivered to the site seven (7) calendar days in advance or time planned on incorporating them into the work. Owner’s testing lab will confirm submitted test results and compaction curve data.
  - 2. 5-lb sample to Architect’s office for visual conformance confirmation.
  - 3. 12-by-12-inch sample of drainage fabric.
  - 4. 12-by-12-inch sample of separation fabric.
  - 5. 4-foot strip of each type of warning tape.
- D. Material Test Reports: From an approved qualified testing agency indicating and interpreting test results for compliance of the following with requirements indicated:
  - 1. Complete mechanical/sieve analysis classification according to Form 816 and ASTM D 2487 for every 400 cubic yards of on-site or borrow soil material proposed for fill and backfill. Washed sieve shall be performed for 200 sieve on all materials.
  - 2. Laboratory compaction curve according to ASTM D 1557 for each on-site or borrow soil material proposed for fill and backfill.
  - 3. Report of actual unconfined compressive strength and/or results of bearing tests of each stratum tested.
  - 4. Test sampling shall conform to the requirements of ASTM D-75, and ASTM D-3665.
- E. Blasting plan approved by authorities having jurisdiction, for record purposes.
- F. Seismic survey agency report, for record purposes.

- G. Construct mock-up of stone slope embankment in place. Mock up shall be minimum of 10 square feet and shall represent proposed finish product.
- H. All installation of materials prior to testing and/or review and response by Architect is at Contractor's risk.

#### 1.5 QUALITY ASSURANCE

- A. Comply with applicable requirements of NFPA 495, "Explosive Materials Code" and Form 816, Paragraph 1.07.08.
- B. Seismic Survey Agency: An independent testing agency, acceptable to authorities having jurisdiction, experienced in seismic surveys and blasting procedures to perform the following services:
  - 1. Prepare plan report types of explosive and sizes of charge to be used in each area of rock removal, types of blasting mats, sequence of blasting operations, and procedures that will prevent damage to site improvements and structures on Project site and adjacent properties.
  - 2. Seismographic monitoring services during blasting operations.
  - 3. Prepare a preblast survey of all adjacent properties, including a structural inspection of the buildings and properties and shall include a written and photographic record of existing conditions.
  - 4. Blast operations shall not commence until all reports and plans are received and approved by the Owner and the Architect.
- C. Geotechnical Testing Agency Qualifications: An independent testing agency qualified according to ASTM E 329 to conduct soil materials and rock-definition testing, as documented according to ASTM D 3740 and ASTM E 548.
- D. Pre-excavation Conference: Conduct conference at Project site to comply with requirements in Division 1, Section "Project Coordination".
  - 1. Before commencing earthwork, meet with representatives of the governing authorities, Owner, Architect, Engineer, consultants, independent testing agency, and other concerned entities. Review earthwork procedures and responsibilities including testing and inspection procedures and requirements. Notify participants at least 3 working days prior to convening conference. Record discussions and agreements and furnish a copy to each participant.
- E. Testing: Compaction tests will be required by the Owner and will be paid for by the Owner. No specific testing schedule has been established at this time. If tests indicate that density requirements have not been achieved, the Contractor shall continue compacting.

All retesting in these areas shall be paid for by the Contractor. See Division 1, Section "Quality Control Services". Contractor is required to compensate testing laboratory, directly, for all material test reports.
- F. Density and Compaction Testing: The Contractor is responsible to schedule compaction tests and to allow adequate time for the proper execution of said tests.

- G. Protect all benchmarks, monuments, and property boundary pins. Replace if destroyed by Contractor's operations.

#### 1.6 PROJECT CONDITIONS

- A. Existing Utilities: Do not interrupt utilities serving facilities occupied by Owner or others unless permitted in writing by Architect and then only after arranging to provide temporary utility services according to requirements indicated. Note that school operations must be maintained throughout construction.
  - 1. Notify Architect not less than two days in advance of proposed utility interruptions.
  - 2. Do not proceed with utility interruptions without Architect's written permission.
  - 3. Contact utility-locator service for area where Project is located before excavating.
- B. Demolish and completely remove from site existing underground utilities indicated to be removed. Coordinate with utility companies to shut off services if lines are active. Contact **[Call Before You Dig (1-800-922-4455)]** prior to any earthwork or demolition operations.

### PART 2 - PRODUCTS

#### 2.1 SOIL MATERIALS

- A. General: Provide borrow soil materials when sufficient satisfactory soil materials are not available from excavations.
- B. Granular Fill: Form 816 Article M.02.06, Type 'B' is to be used for filling under footings, pavements, site improvements, and subbase under pavements that is required to achieve the rough grades indicated.
  - 1. Provide borrow material as required to meet project specifications.
- C. Crushed Stone: Clean, sound material free of debris, waste, frozen materials and organic material conforming to Form 816, Article M.01.01 size as indicated on Drawings.
- D. Processed Aggregate: Artificially graded mixture of sound coarse and fine aggregates, containing no more than 15 percent by weight of recycled bituminous concrete. Mixture to be free of debris, waste, frozen materials and organic materials and conform to Form 816, Article M.05.01. Maximum size of aggregate shall not exceed 2/3 of lift thickness. Broken stone is required; rounded gravel will not be permitted.
- E. Utility Bedding Material: Sand or sandy soil free of debris, waste, frozen materials and organics with 100 percent passing a 3/8-inch sieve and not more than 10 percent passing a No. 200 sieve or as specifically required by applicable utility authority.
- F. General Fill: Material used to establish subgrade elevations may be either:

1. Approved soil material available from excavation on site provided material meets specification for general fill as described below, or approved by Architect prior to placement. Maximum size 8”.
2. Approved material, obtained from off-site, certified to conform to the following grain-size gradation:

| SQUARE MESH SIEVES | PERCENT PASSING WEIGHT |
|--------------------|------------------------|
| Pass 5”            | 100                    |
| Pass 3/4”          | 75-100                 |
| Pass #4            | 25-80                  |

Less than 15% of the material passing the #4 sieve shall pass a #200 sieve.

3. All material used for general filling shall be clean, free of clay and organic material and capable of satisfactory compaction.
  4. If sufficient approved on-site material is not available to meet site elevations indicated, Contractor shall provide additional approved off-site material at no extra cost to Owner.
- G. Stone Screenings: Form 816, Article M.01.01 “Screenings”.
- H. Sand: Form 816, Section M.11.04, Grade “B”.
- I. Subsoil: shall be the existing on site weathered moraine material; typically 12”–24” depth located immediately under the existing topsoil and atop the residual moraine material.
- J. Stone: An individual rock fragment or natural stone, with a volume of 0.5 cubic yards to 1.5 cubic yards, obtained from on-site excavation, on-site processing of rock or boulders, or an off-site source. All stone obtained from on-site excavation shall be considered Mass Earth of Trench Earth. All excess stone shall be considered “Unsatisfactory Soils” and shall be legally disposed of off-site.
- K. CTDOT Modified Rip Rap: Form 816, Section M. 12.02. Material used to establish stone slope embankments. No fines or organic material shall be permitted.

## 2.2 ACCESSORIES

- A. Detectable Warning Tape: Acid- and alkali-resistant polyethylene film warning tape manufactured for marking and identifying underground utilities, minimum 6 inches wide and 4 mils thick, continuously inscribed with a description of utility, with metallic core encased in a protective jacket for corrosion protection, detectable by metal detector when tape is buried up to 30 inches deep; colored as follows:
1. Red: Electric.
  2. Yellow: Gas, oil, steam, and dangerous materials.
  3. Orange: Telephone and other communications.
  4. Blue: Water systems.
  5. Green: Sewer systems.

- B. Drainage Fabric: Non-woven geotextile, specifically manufactured as a drainage geotextile; made from polyolefins, polyesters, or polyamides; and with the following minimum properties determined according to ASTM D 4759 and referenced standard test methods:
1. Grab Tensile Strength: 110 lb/f; ASTM D 4632.
  2. Tear Strength: 40 lb/f; ASTM D 4533.
  3. Puncture Resistance: 50 lb/f; ASTM D 4833.
  4. Water Flow Rate: 150 gpm per sq. ft.; ASTM D 4491.
  5. Apparent Opening Size: No. 50; ASTM D 4751.
- C. Separation Fabric: Woven geotextile, specifically manufactured for use as a separation geotextile; made from polyolefins, polyesters, or polyamides; and with the following minimum properties determined according to ASTM D 4759 and referenced standard test methods:
1. Grab Tensile Strength: 200 lbf; ASTM D 4632.
  2. Tear Strength: 75 lbf; ASTM D 4533.
  3. Puncture Resistance: 90 lbf; ASTM D 4833.
  4. Water Flow Rate: 4 gpm per sq. ft.; ASTM D 4491.
  5. Apparent Opening Size: No. 30; ASTM D 4751.

### PART 3 - EXECUTION

#### 3.1 PREPARATION

- A. Protect structures, utilities, sidewalks, pavements, and other facilities from damage caused by settlement, lateral movement, undermining, washout, and other hazards created by earthwork operations.
- B. Protect subgrades and foundation soils against freezing temperatures or frost. Provide protective insulating materials as necessary.
- C. Provide erosion-control measures to prevent erosion or displacement of soils and discharge of soil-bearing water runoff or airborne dust to adjacent properties and walkways. Refer to Division 31, Section "Sedimentation and Erosion Control".
- D. Provide protective safety barrier around all trees in the work area that are to remain.

#### 3.2 EXPLOSIVES

- A. Explosives: Obtain written permission from authorities having jurisdiction before bringing explosives to Project site or using explosives on Project site. Secure and pay for all permits as required.
- B. Comply with procedures outlined in paragraph "Quality Assurance", sub-paragraph "Seismic Survey Agency", above and Form 816, Section 1.07.08. No overnight on-site storage of explosives is permitted.

1. Do not damage adjacent structures, property, or site improvements or weaken the bearing capacity of rock subgrade when using explosives.

- C. Provide minimum 48-hours notice to Owner, Architect, abutting properties, and all affected utilities. No blasting is permitted prior to 8:00 a.m. or after 4:00 p.m. or on Holidays, Saturdays or Sundays without written permission of the Owner. Blasting is NOT permitted while school is in session unless otherwise noted.

### 3.3 EXCAVATION, GENERAL

- A. Unclassified Excavation: Excavation to subgrade elevations regardless of the character of the surface and subsurface conditions encountered, including rock, soil materials, and obstructions. No changes in the Contract Sum or the Contract Time will be authorized for rock excavation or removal of obstructions.
  1. If excavated materials intended for fill and backfill include unsatisfactory materials and rock, replace with satisfactory soil materials.
  2. Contractor will not be entitled to additional time to complete the project or additional compensation, when rock removal is required.

### 3.4 STABILITY OF EXCAVATIONS

- A. Comply with local codes, ordinances and requirements of authorities having jurisdiction to maintain stable excavations.

### 3.5 EXCAVATION FOR STRUCTURES

- A. Excavate to indicated elevations and dimensions within a tolerance of plus or minus [1 inch]. Extend excavations a sufficient distance from structures for placing and removing concrete formwork, for installing services and other construction, and for inspections.
  1. Excavation for Underground Tanks, Basins, and Mechanical or Electrical Utility Structures: Excavate to elevations and dimensions indicated within a tolerance of plus or minus **1 inch**. Do not disturb bottom of excavations intended for bearing surface.

### 3.6 EXCAVATION FOR WALKS AND PAVEMENTS

- A. Excavate surfaces under walks and pavements to indicated cross sections, elevations, and grades.

### 3.7 APPROVAL OF SUBGRADE

- A. Notify Architect and Owner's Representative when excavations have reached required subgrade.

- B. Notify Architect and Civil engineer when excavations have reached required subgrade in porous pavement areas. Subgrade shall be reviewed and approved by Civil engineer.
- C. If unsatisfactory soil is present at sub-grade elevation, continue excavation and replace with compacted backfill or fill material as directed.
  - 1. Additional excavation and replacement material will be paid for according to Contract provisions for changes in the work.
- D. Proof roll subgrade with heavy pneumatic-tired equipment to identify soft pockets and areas of excess yielding. Do not proof roll wet or saturated subgrades. Conform to Form 816, Section. Subgrade must be approved prior to application of any borrow or fill materials.
- E. If it is determined that unsatisfactory soil or excess moisture content is present, continue excavation and replace with compacted free draining backfill or fill material as directed.
- F. Reconstruct subgrades damaged by freezing temperatures, frost, rain, accumulated water, or construction activities, as directed by Architect.

### 3.8 UNAUTHORIZED EXCAVATION

- A. Fill unauthorized excavation under foundations or wall footings by extending bottom elevation of concrete foundation or footing to excavation bottom, without altering top elevation. Lean concrete fill may be used when approved by Architect.
  - 1. Fill unauthorized excavations under other construction or utility pipe as directed by Architect.

### 3.9 STORAGE OF SOIL MATERIALS

- A. Stockpile borrow materials and satisfactory excavated/manufactured soil materials. Stockpile soil materials without intermixing. Place, grade, and shape stockpiles to drain surface water. Cover with tarps to prevent windblown dust or temporarily seed as per Division 31 Section "Erosion and Sedimentation Controls".
  - 1. Stockpile soil materials away from edge of excavations. Do not store within drip line of remaining trees.
  - 2. Contamination/intermixing of soil materials is just cause for rejection of material.

### 3.10 BACKFILL

- A. Place and compact backfill in excavations promptly, but not before completing the following:
  - 1. Acceptance of construction below finish grade including, where applicable, dampproofing, waterproofing, and perimeter insulation and drainage.
  - 2. Surveying locations of underground utilities for record documents.
  - 3. Inspecting, testing, and approving of underground utilities.
  - 4. Removing concrete formwork.
  - 5. Removing trash and debris from excavation.

6. Removing temporary shoring and bracing, and sheeting.
7. Installing permanent or temporary horizontal bracing on horizontally supported walls.

### 3.11 PLACEMENT OF FILL

- A. Preparation: Remove vegetation, topsoil, debris, unsatisfactory soil materials, obstructions, and deleterious materials from ground surface before placing fills.
- B. Plow, scarify, bench, or break up sloped surfaces steeper than 1 vertical to 4 horizontal so fill material will bond with existing material.
- C. When subgrade or existing ground surface to receive fill has a density less than that required for fill, break up ground surface to depth required, pulverize, moisture-condition or aerate soil and recompact to required density.
- D. Place and compact fill material in maximum 8" lifts. After placement, thoroughly knead all general fill with sheep's foot rollers to break down any remaining chunks of soil prior to vibratory compaction.
- E. Do not deposit fill in areas of standing water. Any pockets of sediment and foreign material are to be removed before filling continues.
- F. Compaction: Each lift shall be compacted. Maintain optimum and proper moisture content to achieve required compaction. Coordinate with Owner on testing schedule throughout earthwork operations.
- G. Fill under lawn areas shall be compacted between 92% and 96% modified AASHTO laboratory density (ASTM D-1557, Method C).
- H. Fill under structures, pavements, and site improvements within 5' of grade shall be compacted to minimum 95% OF MODIFIED AASHTO laboratory density (ASTM D-1557, Method C). Fill under pavement 5 or more feet below grade shall be compacted minimum 92% of modified AASHTO laboratory density (ASTM D-1557, Method C). Under bituminous pavements, compact processed aggregate materials to minimum 98% modified AASHTO laboratory density.
- I. Special Requirements
  1. Remove all accumulated silts and organic material from temporary sedimentation, siltation, and detention basins prior to proceeding with earthwork.
  2. Phase all earthwork operations in all key identified slopes so that each slope and bench/terrace is completed, including compaction and stabilization prior to proceeding with next higher slope/bench. Notify Architect, Engineer, and Geotechnical Consultant for inspection of each slope/bench as it is formed and stabilized. Do not proceed with additional embankment/earthwork operation until approved by Owner's Representative and Engineer.

### 3.12 MOISTURE CONTROL (All Soils)



- A. Uniformly moisten or aerate subgrade and each subsequent fill or backfill layer before compaction to within 2 percent of optimum moisture content.
- B. Do not place backfill or fill material on surfaces that are muddy, frozen, or contain frost or ice.
- C. Remove and replace, or scarify and air-dry, all soil material that exceeds optimum moisture content by 2 percent and is too wet to compact to specified dry unit weight.
  - 1. Stockpile or spread and dry removed wet satisfactory soil material.
- D. The Contractor is alerted that the nature of native materials at this site is such that they are sensitive to moisture. On-site materials are difficult to handle and compact and are easily disturbed when wet. The Contractor shall plan and conduct his excavation and filling operations considering the nature of the on-site materials.

### 3.13 FILL AND COMPACTION OF MATERIALS

- A. Place materials in layers not more than 8 inches in loose depth for material compacted by heavy compaction equipment (minimum 10 tons static weight, 20 tons dynamic force) and not more than 4 inches in loose depth for material compacted by hand-operated tampers. Otherwise, conform to requirements of paragraph 3.12.
- B. Compaction equipment shall not be of the nature as to cause unstable conditions in the underlying natural soil. Compacting equipment shall be approved for use by the inspector of the Owner's testing laboratory.

### 3.14 GRADING

- A. General: Uniformly grade areas to a smooth surface, free from irregular surface changes. Comply with compaction requirements and grade to cross sections, lines, and elevations indicated. Shape pavement base course with required cross sections and elevations.
  - 1. Provide a smooth transition between adjacent existing grades and new grades.
  - 2. Cut out soft spots, fill low spots, and trim high spots to comply with required surface tolerances.
  - 3. In all cases, maintain positive drainage.
- B. Site Grading: Slope grades to direct water away from buildings and to prevent ponding. Finish subgrades to required elevations within the following tolerances:
  - 1. Lawn or Unpaved Areas: Plus or minus 1 inch.
  - 2. Walks: Plus or minus 1 inch.
  - 3. Pavements: Plus or minus 1/2 inch.
- C. Pavement Shoulders: Place shoulders along edges of subbase and base course to prevent lateral movement. Construct shoulders, at least 12 inches wide, of acceptable soil materials and compact simultaneously with each subbase and base layer.

### 3.15 DRAINAGE FABRIC

- A. Install drainage fabric as shown on civil and landscape drawings and details. Fabric shall be placed all around the crushed stone that surrounds the foundation drains. The crushed stone surrounding the perforated drain pipe shall be completely wrapped in geotextile drainage fabric. The fabric shall be lapped at all ends, edges, and joints with adjacent sections of fabric. Care shall be exercised to avoid puncturing or tearing the fabric. Any fabric punctured or torn shall be patched with another piece of fabric extending at least two feet beyond the puncture or tear.

### 3.16 FIELD QUALITY CONTROL

- A. Testing Agency: Allow the Owner's testing agency to inspect and test each subgrade and each fill or backfill layer. Do not proceed until test results for previously completed work verify compliance with requirements.
  - 1. Perform field in-place density tests according to ASTM D 1556 (sand cone method), ASTM D 2167 (rubber balloon method), or ASTM D 2937 (drive cylinder method), as applicable.
    - a. Field in-place density tests may also be performed by the nuclear method according to ASTM D 2922, provided that calibration curves are periodically checked and adjusted to correlate to tests performed using ASTM C 1556. With each density calibration check, check the calibration curves furnished with the moisture gages according to ASTM D 3017.
    - b. When field in-place density tests are performed using nuclear methods, make calibration checks of both density and moisture gages at beginning of work, on each different type of material encountered, and at intervals as directed by the Engineer.
  - 2. Trench Backfill: In each compacted initial and final backfill layer, perform at least one field in-place density test for each 150 feet or less of trench, but no fewer than two tests.
- B. When testing agency reports that subgrades, fills, or backfills are below specified density, scarify and moisten or aerate, or allow to dry, or remove and replace soil to the depth required, re-compact and retest until required density is obtained. All retesting costs are the responsibility of the Contractor.
- C. Testing Laboratory's presence does not include supervision or direction of the actual work by the Contractor, his employees, subcontractors or agents. Neither the presence of the Testing Laboratory, nor any observations and testing performed by him shall excuse the Contractor from defects discovered in his work.
- D. Testing equipment will be provided by and testing performed by the Testing Laboratory, except as otherwise provided by Contract. Upon request by Architect, the Contractor shall provide such auxiliary personnel and services as needed to accomplish testing work and to repair damage caused thereby to permanent work.

### 3.17 PROTECTION

- A. Protecting Graded Areas: Protect newly graded areas from traffic, freezing, and erosion. Keep free of trash and debris.
- B. Repair and reestablish grades to specified tolerances where completed or partially completed surfaces become eroded, rutted, settled, or where they lose compaction due to subsequent construction operations or weather conditions.
  - 1. Scarify or remove and replace soil material to depth as directed by the Architect; reshape and re-compact at optimum moisture content to the required density.
- C. Settling: Where settling occurs during the Project correction period, remove finished surfacing, backfill with additional approved material, compact, and reconstruct surfacing.
  - 1. Restore appearance, quality, and condition of finished surfacing to match adjacent work, and eliminate evidence of restoration to the greatest extent possible.

### 3.18 DISPOSAL OF SURPLUS AND WASTE MATERIALS

- A. Refer to Division 31, Section “Site Clearing” for requirements of removal and delivery of surplus suitable soil to the Owner.
- B. Disposal: Remove unsuitable soils, waste material, , including trash, and debris, and legally dispose of it off Owner's property.
- C. Refer to Division 32, Section “Topsoil” for disposal of topsoil.

### 3.19 STONE SLOPE EMBANKMENT

- A. Excavate to required elevations for installation of geotextile fabric, and Rip Rap as required. See Contract Documents for location and extent of stone slope embankment.
- B. Place stones to minimize gaps between stones. Maintain line, grade and batter of stone slope embankment.
- C. Hand place smaller cobble or rock fragments in gaps and holes in embankment to provide continuous homogenous face.
- D. Architect solely responsible for approval of final stone slope embankment installation and appearance.
- E. Remove any fines or organic material that may permit the growth of vegetation.

END OF SECTION 31 20 00

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

## SECTION 31 23 19 – DEWATERING

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### 1.2 SUMMARY

- A. This Section includes construction dewatering.
- B. Related Sections include the following:
  - 1. Division 01 Section "Temporary Facilities and Controls".
  - 2. Division 31 Section "Earth Moving"
  - 3. Division 31 Section "Erosion and Sedimentation Control"

#### 1.3 PERFORMANCE REQUIREMENTS

- A. Dewatering Performance: Design, furnish, install, test, operate, monitor, and maintain dewatering system of sufficient scope, size, and capacity to control ground-water flow into excavations and permit construction to proceed on dry, stable subgrades.
  - 1. Work includes removing dewatering system when no longer needed.
  - 2. Maintain dewatering operations to ensure erosion control, stability of excavations and constructed slopes that excavation does not flood, and that damage to subgrades and permanent structures is prevented.
  - 3. Prevent surface water from entering excavations by grading, dikes, or other means.
  - 4. Accomplish dewatering without damaging existing buildings adjacent to excavation.

#### 1.4 SUBMITTALS

- A. Shop Drawings: For dewatering system. Show arrangement, locations, and details of wells and well points; locations of headers and discharge lines; and means of discharge and disposal of water.
  - 1. Include layouts of piezometers and flow-measuring devices for monitoring performance of dewatering system.
  - 2. Include a written report outlining control procedures to be adopted if dewatering problems arise.
  - 3. Include Shop Drawings signed and sealed by the qualified professional engineer responsible for their preparation.

- B. Qualification Data: For firms and persons specified in “Quality Assurance” Article to demonstrate their capabilities and experience. Include lists of completed projects with project names and addresses, names and addresses of architects and owners, and other information specified.
- C. Photographs or videotape, sufficiently detailed, of existing conditions of adjoining construction and site improvements that might be misconstrued as damage caused by dewatering operations.
- D. Record drawings at Project closeout identifying and locating capped utilities and other subsurface structural, electrical, or mechanical conditions performed during dewatering.
- E. Field Test Reports: Before starting excavation, submit test results and computations demonstrating that dewatering system is capable of meeting performance requirements.

#### 1.5 QUALITY ASSURANCE

- A. Installer Qualifications: Engage an experienced installer to assume engineering responsibility and perform dewatering who has specialized in installing dewatering systems similar to those required for this Project and with a record of successful in-service performance.
- B. Professional Engineer Qualifications: A professional engineer who is legally qualified to practice in the jurisdiction where the Project is located and who is experienced in providing engineering services for designing dewatering systems that are similar to those indicated for this Project in material, design, and extent.
  - 1. Engineering Responsibility: Engage a qualified professional engineer to prepare or supervise the preparation of data for the dewatering system including drawings, testing program, test result interpretation, and comprehensive engineering analysis that shows the system’s compliance with specified requirements.
- C. Regulatory Requirements: Comply with water disposal requirements of authorities having jurisdiction.

#### 1.6 PROJECT CONDITIONS

- A. Existing Utilities: Do not interrupt utilities serving facilities occupied by Owner or others unless permitted in writing by Architect and then only after arranging to provide temporary utility services according to requirements indicated.
- B. Project-Site Information: A geotechnical report has been prepared for this Project and is available for information only. The opinions expressed in this report are those of geotechnical engineer and represent interpretations of subsoil conditions, tests, and results of analyses conducted by geotechnical engineer. Owner will not be responsible for interpretations or conclusions drawn from this data.
  - 1. Make additional test borings and conduct other exploratory operations necessary for dewatering.

- C. Survey adjacent structures and improvements, employing a qualified professional engineer or land surveyor, establishing exact elevations at fixed points to act as benchmarks. Clearly identify benchmarks and record existing elevations.
  - 1. During dewatering, regularly resurvey benchmarks, maintaining an accurate log of surveyed elevations for comparison with original elevations. Promptly notify Architect if changes in elevations occur or if cracks, sags, or other damage is evident in adjacent construction.

## PART 2 - PRODUCTS (Not Applicable)

## PART 3 - EXECUTION

### 3.1 PREPARATION

- A. Protect structures, utilities, sidewalks, pavements, and other facilities from damage caused by settlement, lateral movement, undermining, washout, and other hazards created by dewatering operations.
  - 1. Prevent surface water and subsurface or groundwater from entering excavations, from ponding on prepared subgrades, and from flooding site and surrounding area.
  - 2. Protect subgrades and foundation soils from softening and damage by rain or water accumulation.
- B. Install dewatering system to ensure minimum interference with roads, streets, walks, and other adjacent occupied and used facilities.
  - 1. Do not close or obstruct streets, walks, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction. Provide alternate routes around closed or obstructed traffic ways if required by authorities having jurisdiction.

### 3.2 DEWATERING

- A. Install dewatering system utilizing wells, well points, or similar methods complete with pump equipment, standby power and pumps, filter material gradation, valves, appurtenances, water disposal, and surface-water controls. Maintain site drainage at all times.
- B. Before excavation below ground-water level, place system into operation to lower water to specified levels and then operate it continuously until drains, sewers, and structures have been constructed and fill materials have been placed, or until dewatering is no longer required.

- C. Provide an adequate system to lower and control ground water to permit excavation, construction of structures, and placement of fill materials on dry subgrades. Install sufficient dewatering equipment to drain water-bearing strata above and below bottom of foundations, drains, sewers, and other excavations.
  - 1. Do not permit open-sump pumping that leads to loss of fines, soil piping, subgrade softening, and slope instability.
- D. Reduce hydrostatic head in water-bearing strata below subgrade elevations of foundations, drains, sewers, and other excavations.
  - 1. Maintain piezometric water level a minimum of 24 inches below surface of excavation.
- E. Dispose of water, removed from excavations, in a manner to avoid endangering public health, property, and other portions of work under construction or completed. Dispose of water in a manner to avoid inconvenience to others. Provide sumps, sedimentation tanks, temporary siltation basins or any other measures requested by authorities having jurisdiction. Prevent erosion or siltation of adjacent areas.
- F. Provide standby equipment on-site, installed and available for immediate operation, to maintain dewatering on a continuous basis if any part of system becomes inadequate or fails. If dewatering requirements are not satisfied due to inadequacy or failure of dewatering system, restore damaged structures and foundation soils at no additional expense.
  - 1. Remove dewatering system from Project site on completion of dewatering. Plug or fill well holes with sand or cut off and cap wells a minimum of 36 inches below overlying construction.
- G. Damages: Promptly repair damages to adjacent facilities caused by dewatering operations.

### 3.3 OBSERVATION WELLS

- A. Provide, take measurements, and maintain at least the minimum number of observation wells or piezometers indicated and additional observation wells as may be required by authorities having jurisdiction.
- B. Observe and record daily elevation of ground water and piezometric water levels in observation wells.
- C. Repair or replace, within 24 hours, observation wells that become inactive, damaged, or destroyed. Suspend construction activities in areas where observation wells are not functioning properly until reliable observations can be made. Add or remove water from observation-well risers to demonstrate that observation wells are functioning properly.
  - 1. Fill observation wells, remove piezometers, and fill holes when dewatering is completed.

END OF SECTION 31 23 19



## **SECTION 31 23 33 -TRENCH EXCAVATION AND BACKFILL FOR UTILITIES**

### **PART 1 - GENERAL**

#### **1.1. RELATED DOCUMENTS**

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”
- B. Local Utility Company Requirements

#### **1.2. SCOPE OF WORK**

- A. Excavating trenches for the installation of utilities.
- B. Backfilling trench with bedding material as specified and finish filling trenches with suitable material to proposed subgrade.
- C. Compacting subgrade, bedding, and backfill materials in an acceptable manner.
- D. Compliance with all environmental and health and safety regulations.

#### **1.3. RELATED SECTIONS**

- A. Section 334100 – Storm Sewer Systems

#### **1.4. REFERENCE STANDARDS**

- A. American Society for Testing and Materials (ASTM) Latest Edition
  - 1. D 422 Method for Particle Size Analysis
  - 2. D 698 Test of Moisture Density Relations of Soils - Standard Proctor Method
  - 3. D 1557 Test for Moisture-Density Relations of Soils Using 10-lb. (4.5 Kg)
  - 4. Hammer and 18-inch (457 mm) Drop (Modified Proctor)
  - 5. D 2216 Laboratory Determination of Moisture Content of Soil
  - 6. D 2487 Classification of Soils for Engineering Purposes
  - 7. D 2922 Tests for Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)
  - 8. D 3017 Test for Moisture Content of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)
  - 9. D 4318 Test for Plastic Limit, Liquid Limit, & Plasticity Index of Soils

- B. American Association of State Highway and Transportation Officials (AASHTO) latest edition
  - 1. T 88 Mechanical Analysis of Soils

#### 1.5. QUALITY ASSURANCE

- A. A Geotechnical Engineer, selected and paid by owner, may be retained to perform construction inspection and testing on backfilling operations. This inspection will not relieve the Contractor from his responsibility to complete the work in accordance with the plans and specifications.

#### 1.6. SUBMITTALS

- A. Shop Drawings or details pertaining to Site Utilities are not required unless use of materials, methods, equipment, or procedures contrary to the Construction Drawings or these specifications are proposed. No work shall be performed until shop drawings, if required, have been accepted by the Owner and Engineer.
- B. The Contractor shall contact all utility companies and identify any requirements and provide written confirmation of the status of all utility construction to the Owner at the time of the preconstruction conference or no later than 30 days following the project possession date.

- C. Submit a sample of each type of offsite material that is to be used in backfilling.

#### 1.7. PROJECT RECORD DOCUMENTS

- A. Accurately record locations of all subsurface utilities, structures and obstructions encountered.
- B. Accurately record any as-built variation from the construction plans and specifications. The Contractor shall provide as-built drawings within 30 days of project completion.

### PART 2 - PRODUCTS

#### 2.1 MATERIALS

- A. Bedding Material: AASHTO No. 67 processed sand and gravel free from debris, clay lumps, organic, or other deleterious material, and complying with following gradation requirements:
  - 1. U. S. Sieve: Size Percent Passing (by weight)
    - a. 1 Inch: 100
    - b. 3/4 Inch: 90-100
    - c. 3/8 Inch: 20-55
    - d. No. 4: 0-10
    - e. No. 8: 0-5
- B. Backfill material as approved by the owner and/or the Geotechnical Engineer.

### PART 3 - EXECUTION

#### 3.1 PREPARATION

- A. Set all lines, elevations, and grades for utility and drainage system work and maintain for the duration of work. Provide careful maintenance of benchmarks, property corners, monuments, or other reference points.
- B. Protect and maintain in operating condition, existing utilities encountered during utility installation. Repair any damage to surface or subsurface improvements shown on Drawings.
- C. Verify location, size, elevation, and other pertinent data required to make connections between existing utilities and drainage systems, and proposed construction indicated on Drawings. Coordinate all building utility connection locations and elevations with architectural plans. Contractor shall comply with all local codes and regulations.
- D. Install dewatering systems that will be required to construct the proposed utilities to the design elevations and using the methods described herein. Water pumped out of excavations shall be disposed of on-site, and shall not be discharged directly to the city storm drainage system, city sanitary sewer system, watercourses, or wetlands.
- E. Over-excavate and properly prepare areas of subgrade that are not capable of supporting the proposed systems. These areas are to be stabilized by using acceptable backfill materials and/or additional bedding material placed and compacted as specified to the satisfaction of the Geotechnical Engineer.

#### 3.2 EXCAVATION

- A. Contact local utility companies before excavation begins. Dig trenches at proper width and depth for laying pipe, conduit, or cable and in accordance with utility company requirements. Cut trench banks for safety and remove stones as necessary to avoid point-bearing.
- B. All trench excavation side walls shall be sloped, shored, sheeted, braced or otherwise supported by means of sufficient strength to protect the workmen within them in accordance with the applicable rules and regulations established for construction by the Department of Labor, Occupational Safety and Health Administration (OSHA), and by local ordinances. Lateral travel distance to an exit ladder or steps shall not be greater than 25 feet in trenches 4 feet or deeper.
- C. Trench width requirements below the top of the pipe shall not be less than 12" nor more than 18" wider than outside surface of any pipe or conduit that is to be installed. All other trench width requirements for pipe, conduit, or cable shall be the minimum practical width that will allow for proper compaction of trench backfill and satisfy safety and utility company regulations.
- D. Accurately grade trench bottom to an elevation 6 inches below the pipe, as per bedding details in construction drawings. Provide uniform bearing and support for each section of pipe on bedding material at every point along the entire length, except where necessary to excavate for bell holes, pipe joints, or other required connections. Dig bell holes and depressions for joints after trench bottom has been graded. Dig no deeper, longer, or wider than needed to make the joint connection properly.

- E. During excavation, stockpile excavated material suitable for backfilling in an orderly manner far enough from the trench to avoid overloading, slides, or cave-ins.
- F. Remove excavated materials from the site which are not suitable for backfill.
- G. Any abandoned structures utilities or debris discovered during excavation shall be removed and disposed of, or capped.
- H. Utility alignments have been designed to avoid expected obstructions wherever possible. If unanticipated significant obstructions are encountered during utility installation work immediately notify the Owner and Engineer.
- I. Prevent surface water from flowing into trenches or other excavations by temporary grading or other methods, as required. Remove accumulated water in trenches or other excavations by pumping or other acceptable methods. Water shall not be directly pumped to the city sewer system, drainage system, watercourses, or wetlands.
- J. Utility installation shall meet the following minimum pipe installation depths, or applicable codes and ordinances, measured from finished grade or the paved surface:
  - 1. Storm Sewer: Elevations and grades as indicated on Drawings.
  - 2. Electrical Conduits: 24" minimum to top of secondary service conduits, 36" minimum to the top of primary service conduits, or as required by NEC 300-5, NEC 710-36 codes, or the local utility company requirements, whichever is deeper.
  - 3. Telephone Conduits: 18" minimum to top of conduit, or as required by the local utility company, whichever is deeper.
  - 4. Gas Mains and Service: 30" minimum to top of pipe, or as required by the local utility company, whichever is deeper.

### 3.3 PIPE BEDDING

- A. Accurately cut trenches for pipe or conduit to designated line and grade 6 inches below the bottom of the pipe, to width as specified previously. Compact trench bottoms a minimum of 95% of the maximum dry density as determined by ASTM D1557, Modified Proctor Test.
- B. Over-excavate wet or unstable soil, if encountered, from trench bottom as necessary to provide a suitable base for continuous and uniform bedding.
- C. Place bedding material and compact in 6 inch loose lifts to obtain at least 95% of the maximum dry density. Accurately shape bedding material to conform to lower portion of pipe barrel. After pipe installation, place and compact bedding material as specified above in maximum 6 inch loose layers to the springline of the pipe.

3.4 BACKFILLING

- A. After pipe or conduit has been installed, bedded and tested as necessary, backfill trench to finish grade in 12-inch thick loose lifts of approved fill soils, compacting and testing each lift as specified above.
- B. Systematically backfill to allow maximum time for natural settlement. Do not backfill over porous, wet, frozen or spongy subgrade surfaces. Should these conditions exist, the areas should be removed, replaced and re-compacted.

3.5 COMPACTION

- A. Exercise proper caution when compacting immediately over top of pipes or conduits.
- B. Maintain optimum moisture content of fill materials to attain required compaction density.

END OF SECTION 31 23 33

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

## **SECTION 31 25 00 - SOIL EROSION AND SEDIMENT CONTROL**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section "Summary."

#### **1.2 SCOPE OF WORK**

- A. Temporary and permanent soil erosion control systems.

#### **1.3 REFERENCE STANDARDS**

- A. The Connecticut Department of Environmental Protection's (CTDEP) Guidelines for Soil Erosion and Sediment Control, latest edition

#### **1.4 QUALITY ASSURANCE**

- A. The Contractor shall carefully adhere to the construction sequence that is shown on the Contract Drawings.
- B. The Contractor shall follow Soil Erosion and Sediment Control Notes that are shown on the Contract Drawings.
- C. The Contractor shall make frequent inspection of temporary soil erosion controls and maintain them in working order until permanent soil erosion controls are established.

#### **1.5 ENVIRONMENTAL REQUIREMENTS**

- A. The Contractor shall protect adjacent properties and water resources from soil erosion and sediment damage throughout construction.

### **PART 2 - PRODUCTS**

#### **2.1 MATERIALS**

- A. Quick-growing grasses such as wheat, rye or oats in accordance with Contract Drawings.
- B. Fencing for siltation control as specified on the Contract Drawings.
- C. Erosion control matting: Tensar SC250 or approved Equal.
- D. Temporary mulches such as loose straw, netting, wood, cellulose, or agricultural silage.
- E. Fence stakes shall be a minimum of 5 feet in length and be either metal stakes or 2 in x 2 in hardwood stakes driven 2' - 0", as per drawings, into the ground.

- F. Riprap and crushed stone as specified on the Contract Drawings.
- G. Filter fabric as specified on the Contract Drawings, or approved Equal.

### PART 3 - EXECUTION

#### 3.1 PREPARATION

- A. Review site conditions and sediment control plans.
- B. Review the soil erosion and sediment control plans as they apply to current conditions. Any proposed deviation from the plans must be submitted to the Owner's Engineer in writing 72 hours prior to commencing that work.

#### 3.2 SOIL EROSION CONTROL AND SLOPE PROTECTION IMPLEMENTATION

- A. Place soil erosion control systems in accordance with the Contract Documents prior to any earthwork construction.
- B. Limit the surface area of erodible earth material exposed by clearing and grubbing, excavation, borrow and embankment operations through construction phasing and by following the Soil Erosion and Sediment Control Plan.
- C. The Contractor will be required to incorporate all permanent soil erosion control features into the project at the earliest practical time to minimize the need for temporary controls. Cut slopes shall be permanently seeded and mulched as the excavation proceeds to the extent considered desirable and practical. Equip catch basins with filter fabric inlet protection immediately upon construction.
- D. The temporary soil erosion control systems installed by the Contractor shall be maintained as directed by the Engineer to control siltation at all times during the life of the contract. The Contractor must respond to any maintenance or additional work ordered by the Engineer within a 48 hour period.
- E. Slopes that erode easily shall be temporarily seeded as the work progresses with quick growing grass grains of wheat, rye or oats unless otherwise specified in the Landscape Specifications. In areas where seeding is ineffective, as determined by the Owner's Engineer or other governing authorities, the Contractor shall provide erosion control matting as specified on Contract Drawings at no additional cost to the Owner.
- F. All soil erosion control measures shall be maintained until all permanent improvements to the site are complete unless otherwise directed by the Engineer.
- G. The contractor is responsible for phasing the sedimentation and erosion control measures throughout construction.

END OF SECTION 31 25 00



## SECTION 31 25 01 – ENVIRONMENTAL CONTROLS

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### 1.2 SUMMARY

- A. Environmental controls shall include all labor, materials, equipment and performance of all operations in connection with environmental protection.
- B. Special notice is given that the work involved in this contract is located immediately adjacent to inland wetlands and Long Meadow Brook watershed, and the Contractor shall take all precautions and necessary measures to protect these areas at all times.

#### 1.3 DEFINITIONS

- A. Resource Areas: Those areas, conditions or features which, when disturbed by construction activities, create an adverse environmental impact. Such areas include, but are not necessarily limited to densely wooded areas, wetland areas, streams, brooks, rivers, and other water crossings and steep slopes.
- B. Form 816 refers to State of Connecticut, Department of Transportation, “Standard Specifications for Roads, Bridges and Incidental Construction, Form 816”, 2004 addition, with 2005 Supplement.

#### 1.4 SUBMITTALS

- A. Submit under provisions of Division 1.

### PART 2 - PRODUCTS (Not Applicable)

### PART 3 - EXECUTION

#### 3.1 SEDIMENTATION AND EROSION CONTROL

- A. The Contractor shall follow the requirements of Section, “Sedimentation and Erosion Control” and the “Connecticut Guidelines for Soil Erosion and Sedimentation Control”, as amended.

### 3.2 PROTECTION OF AIR AND WATER RESOURCES

- A. During the progress of the work, the Contractor shall conduct his operations and maintain the area of his activities, including sweeping and sprinkling of water as necessary, so as to minimize the creation and dispersion of dust. If the Engineer decides that it is necessary to use calcium chloride for more effective dust control then the Contractor shall furnish and apply the material as directed.
- B. Fuels, lubricants or other hazardous materials shall not be stored in any resource areas.
- C. Fuel, lubricants and other hazardous material shall be stockpiled within an area of positive containment. The area shall have no open communication with surface water bodies or other resource areas, shall have a base of relatively impermeable material and shall have an adequate supply of materials required for spill clean up.

In the event that any such waste is spilled onto the ground, the Contractor shall immediately notify the Owner, promptly clean up the spillage and all contaminated soil, and dispose of the cleanings as hazardous waste material. If a spill occurs, the clean-up activities shall take precedence over normal construction activities in order that damage to the environment is minimized.

- D. All hazardous materials containers shall be properly marked and their contents identified. All fuel oil, lubricant, gasoline, and hydraulic fluid containers shall be fixed in place on the transport vehicle when the vehicle is in motion.
- E. The construction project shall be in compliance with all Federal, State, and local laws with respect to hazardous materials.
- F. All clean up and disposal operations shall comply with all applicable Federal, State, and local statutes, regulations and ordinances and anti-pollution laws.

### 3.3 NOISE ABATEMENT

- A. Construction equipment including generator and compressors shall be enclosed or equipped with mufflers, silencers or miscellaneous to minimize noise.
- B. The Contractor shall limit construction noise in accordance with EPA latest standard criteria and local requirements.

### 3.4 UTILITIES

- A. The Contractor shall comply with all requirements of all applicable Federal, State, and local regulations and all permits issued for the Contract.

END OF SECTION 31 25 01

## SECTION 32 00 00 – EXTERIOR IMPROVEMENTS

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### 1.2 SUMMARY

- A. This Section includes the following:
  - 1. Project Signage and Posts
  - 2. Metal Bollards
- B. Related Sections: The following Sections contain requirements that relate to this Section:
  - 1. Division 32 Section “Concrete Paving”.
  - 2. Division 32 Section “Asphalt Paving”.
  - 3. Division 32 Section “Turf and Grasses”.
  - 4. Division 32 Section “Plants”.

#### 1.3 DEFINITIONS

- A. Form 816: “Standard Specifications for Roads, Bridges and Incidental Construction”, State of Connecticut, Department of Transportation, Form 816, 2004 edition, with 2005 supplement.

#### 1.4 SUBMITTALS

- A. Shop Drawings: Contractor shall provide fully dimensioned shop drawings and manufacturer’s technical literature for all improvements and confirm fabrication, reinforcing, and anchoring systems for approval.

### PART 2 - PRODUCTS

#### 2.1 PROJECT SIGNAGE

- A. 3/32” thick sign face – sheet aluminum signs in conformance with Form 816, Article M.18.13.
- B. Graphic image, text, and sign to conform to State Statute and project requirements (see Drawings for schedule of graphics).

- C. Posts: 2" tubular steel, galvanized, with domed cap. Fastening hardware for all signs shall be galvanized, and compatible with pole materials. Sample submittal required.
- D. Existing Electronic Message Board (located at the main entrance drive) to be relocated as shown, including the construction of new support piers.

## 2.2 METAL BOLLARDS

- A. Schedule 40 galvanized seamless pipe including concrete core and dome.
- B. Provide plastic bollard sleeve with reflective tape; color to be approved
- C. Bollard sleeve to be similar to:
  - 1. "Post Guard", as manufactured by Encore Commercial Products, Inc., Southfield, MI, or approved equal.

## PART 3 - EXECUTION

### 3.1 JOB CONDITIONS

- A. Confirm completion of pavements and other improvements are properly sequenced prior to installation of specified improvements.

### 3.2 PROJECT SIGNAGE

- A. Install signs and posts at each designated location.
- B. Install signage plates and fabricated steel post/bollard assembly where and as detailed at handicap parking areas.
- C. Signs to be installed level and plumb, at a constant vertical alignment.

### 3.3 BOLLARDS

- A. Install bollards where and as detailed. Hold bollards at a constant alignment.

### 3.4 PROTECTION/CLEAN UP

- A. Protect all newly installed equipment until acceptance of the project.
- B. Replace or refinish the surfaces if damaged prior to acceptance.
- C. Clean up all debris from installation procedures.

END OF SECTION 32 00 00

## SECTION 32 12 16 – ASPHALT PAVING

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### 1.2 SUMMARY

- A. This Section includes the following:
  - 1. Inspection and acceptance of earthwork operations and base course installed under Division 31, Section “Earth Moving”.
  - 2. Asphalt paving, including patching and overlays.
  - 3. Pavement-markings.
- B. Related Sections include the following:
  - 1. Division 01 Section “Alternates”.
  - 2. Division 31 Section “Earth Moving”.
  - 3. Division 32 Section “Concrete Paving”.
  - 4. Division 32 Section “Asphalt Curbs”.
  - 5. Division 32 Section “Precast Concrete Curbs.”

#### 1.3 DEFINITIONS

- A. Form 816: “Standard Specifications for Roads, Bridges and Incidental Construction”, State of Connecticut, Department of Transportation, Form 816, 2004 edition, with 2005 supplement.

#### 1.4 SUBMITTALS

- A. Product Data for each product specified. Include technical data and tested physical and performance properties.
- B. Job-Mix Designs for each job mix proposed for the Work.
- C. Shop Drawings: Indicate pavement markings, lane separations, and defined parking spaces. Indicate dedicated handicapped spaces with international graphics symbol.
- D. Samples: 12 by 12 inches minimum, of paving fabric.

- E. Qualification data: For firms and persons specified in the “Quality Assurance” Article to demonstrate their capabilities and experience. Include lists of completed projects with project names and addresses, names and addresses of architects and owner, and other information specified.
- F. Material Certificates: Certificates signed by manufacturers certifying that each material complies with requirements.

#### 1.5 QUALITY ASSURANCE

- A. Installer Qualifications: Engage an experienced installer who has completed asphalt paving for a minimum of three years for general paving similar in material, design, and extent to that indicated for this Project and with a record of successful in-service performance.
- B. Manufacturer Qualifications: Engage a firm experienced in manufacturing asphalt paving similar to that indicated for this Project and with a record of successful in-service performance.
  - 1. Firm shall be a registered and approved paving mix manufacturer with authorities having jurisdiction or with the DOT of the state in which Project is located.
- C. Regulatory Requirements: Modify pavement details and provide additional thicknesses as required to conform to applicable standards for State and local authorities having jurisdiction for work on public property. Secure all permits that are required.
- D. Walks, parking spaces and loading zones constructed for use by persons with accessibility challenges shall conform to the applicable portions of the Americans With Disability Act Accessibility Guidelines (ADA) and the Connecticut State Building Code.
- E. Detectable warning surfaces must be installed as shown on the Construction Documents, in accordance with the Americans with Disabilities Act Accessibility Guidelines. The outside 24 inches of flush walkways shall contain a truncated-dome tactile surface, of contrasting color to the walk surface, 6 inches back from the curb line, for the full width of the flush surface.
- F. Asphalt-Paving Publications Requirements: Comply with AI’s “The Asphalt Handbook”, and ASTM and AASHTO requirements except where more stringent requirements are indicated herein.
- G. Pre-installation Conference: Conduct conference at Project site to comply with requirements of Division 1, Section “Project Coordination” Review methods and procedures related to asphalt paving including, but not limited to the following:
  - 1. Review proposed sources of paving materials, including capabilities and location of manufacturing plant.
  - 2. Review condition of substrate and preparatory work performed by other trades.
  - 3. Review requirements for protecting paving work, including restriction of traffic during installation period and for remainder of construction period.
  - 4. Review and finalize construction schedule for paving and related work. Verify availability for materials, paving Installer’s personnel, and equipment required to execute the Work without delays.

5. Review inspection and testing requirements, governing regulations, and proposed installation procedures.
6. Review forecasted weather conditions and procedures for coping with unfavorable conditions.

#### 1.6 DELIVERY, STORAGE, AND HANDLING

- A. Deliver pavement-marking materials to Project site in original packages with seal unbroken and bearing manufacturers' labels containing brand name and type of material, date of manufacture, and directions for storage.
- B. Store pavement-marking materials in a clean, dry, protected location and within temperature range required by manufacturer. Protect stored materials from direct sunlight.

### PART 2 - PRODUCTS

#### 2.1 ASPHALT MATERIALS

- A. Binder Course: Form 816, Article M.04.03, Class 1.
- B. Surface Course: Form 816, Article M.04.03, Class 2.
- C. Tack Coat: CONN: ASTM D 977, emulsified asphalt slow setting, factory-diluted in water, of suitable grade and consistency for application.

#### 2.2 AUXILIARY MATERIALS

- A. Paving Geotextiles: Nonwoven polypropylene, specifically designed for paving application, resistant to chemical attack, rot and mildew.
- B. Pavement Markings:
  1. Parking lines, stop bars, Handicap Symbols and aisles: Fast Drying White Traffic Paint, per Form 816, Section M.07.20.
  2. Crosswalks: retro reflective thermoplastic preformed material, 90 mils thick, consisting of a homogeneous mixture of high quality polymeric thermoplastic binders, pigments, fillers and glass beads. Materials shall conform to AASHTO, M249-79 (86) except for material being preformed. Color shall be white.
  3. Driveway center lines (two-way traffic): Fast drying yellow traffic paint, as per Form 816, Section M.07.20.

### PART 3 - EXECUTION

#### 3.1 PROJECT CONDITIONS

- A. Environmental Limitations: Do not apply asphalt materials if substrate is wet or excessively damp or the following conditions are not met:
  - 1. Prime and Tack Coats: Minimum surface temperature of 60 deg F.
  - 2. Slurry Coat: Comply with weather limitations of ASTM D 3910.
  - 3. Bituminous Concrete Base Course: Minimum surface temperature of 40 deg F and rising at time of placement, or conform to State Highway Specifications.
  - 4. Bituminous Concrete Surface course: Minimum surface temperature of 60 deg F at time of placement, or conform to State Highway Specifications.
- B. Pavement-Markings: Proceed with pavement marking only on clean, dry surfaces and at a minimum ambient or surface temperature of 40 deg F for oil based materials, 50 deg F for water based materials, and not exceeding 95 deg F.
- C. Grade Control: Establish and maintain the required lines and grades, including crown, inverted crown, and cross-slopes, for each course during paving operations. Conform to tolerances listed in this specification.

#### 3.2 EXAMINATION

- A. Verify that base is dry and in suitable condition to support paving and imposed loads. Ensure proper drainage at all times.
- B. Proof-roll base using heavy, pneumatic-tire rollers to locate areas that are unstable or that require further compaction. Subbase surface to be smooth, free of irregularities, depressions, or unsuitable materials.
- C. Notify Architect in writing of any unsatisfactory conditions. Do not begin paving installation until these conditions have been satisfactorily corrected.
- D. Frame Adjustments:
  - 1. Verify frames for manholes, catch basins, and other such improvements, within areas to be paved, are at their proper elevation.
  - 2. Adjust frames if required. Provide temporary closures over openings until completion of rolling operations. Remove closures at completion of the work. Set covers to grade, flush with the surface of adjoining pavement surface.

#### 3.3 PATCHING AND REPAIRS

- A. Patching: Saw cut perimeter of patch and excavate existing pavement section to sound base. Re-compact new subgrade. Excavate rectangular patches, parallel and perpendicular to the direction of traffic, extending 12 inches into adjacent sound pavement, unless otherwise



indicated. Cut excavation faces vertically. Laminate courses. Feathering of edges and transitions between new and existing pavements is not acceptable.

1. Apply tack coat to faces of excavation and allow to cure before paving.
  2. Fill excavation with dense-graded, hot mix asphalt base mix and, while still hot, compact flush with adjacent surface.
  3. Partially fill excavation with dense-graded, hot-mix asphalt base mix and compact while still hot. Cover asphalt base course with compacted, hot-mix surface layer finished flush with adjacent surfaces.
- B. Crack and Joint Filling: Remove existing filler material from cracks or joints to a depth of ¼ inch. Refill with asphalt joint-filling material to restore watertight condition. Remove excess filler that has accumulated near cracks or joints.
- C. Tack Coat: Apply uniformly with a powered pressure system to existing surfaces of previously constructed asphalt or Portland cement concrete paving and to surfaces abutting or projecting into new, bituminous concrete pavement. Apply at a uniform rate of 0.05 to 0.15 gal./sq. yd. of surface. Excessive application of tack coat is not permissible and shall be removed.
1. Surface to receive tack coat shall be clean, free from silt, dust, soil, pavement grindings and other foreign matter and dry.
  2. Tack coat shall be a constant uniform sprayed application covering a minimum of 98% of the surface to be paved. Swirls or ribbon strips of tack coat are not acceptable. Contractor is responsible for correctly setting pressure, nozzle size and angle, spray bar height and emulsion temperature from applicator.
  3. Allow tack coat to cure (a minimum of 24 hours) undisturbed before paving. No one shall drive or walk across the surface while it is curing.
  4. Tack coat shall be applied to all asphalt surfaces whose application are five days or older or that have had excessive construction traffic that requires dust and debris removal.
  5. Avoid smearing or staining adjoining surfaces, appurtenances, and surroundings. Remove spillages and clean affected surfaces.

### 3.4 SURFACE PREPARATION

- A. General: Immediately before placing asphalt materials, remove loose and deleterious material from substrate surfaces. Ensure that prepared subgrade is ready to receive paving.
1. Sweep loose granular particles from surface of unbound-aggregate base course. Do not dislodge or disturb aggregate embedded in compacted surface of base course.

### 3.5 GEOTEXTILE INSTALLATION

- A. Apply bond coat, consisting of asphalt cement, uniformly to existing surfaces at a rate of 0.20 to 0.30 gal./sq. yd.
- B. Place paving geotextile promptly according to manufacturer's written instruction. Broom or roll geotextile smooth and free of wrinkles and folds. Overlap longitudinal joints 4 inches and transverse joints 6 inches.

1. Protect paving geotextile from traffic and other damage and place overlay paving the same day.

### 3.6 HOT-MIX ASPHALT PLACING

- A. Hot-mix Asphalt: Provide dense, hot-laid asphalt plant mixes approved by authorities having jurisdiction; designed according to the procedures in AI's "Mix Design Methods for Asphalt Concrete and Other Hot-Mix Types"; and complying with the requirements of Form 816, Section M.04.
- B. Machine place hot-mix asphalt mix on prepared surface, spread uniformly, and strike off. Place asphalt mix by hand to areas inaccessible to equipment in a manner that prevents segregation of mix. Place each course to required grade, cross section, and thickness, when compacted. Conform to Form 816 Section 4.06, including transport of material.
  1. Spread mix at minimum temperature of 250 deg F.
  2. Begin applying mix along centerline of crown for crowned sections and on high side of one-way slopes, unless otherwise indicated.
  3. Regulate paver machine speed to obtain smooth, continuous surface free of pulls and tears in asphalt-paving mat.
- C. Place paving in consecutive strips not less than 10 feet wide, except where infill edge strips of a lesser width are required.
  1. After first strip has been placed and rolled, place succeeding strips and extend rolling to overlap previous strips. Complete asphalt base course for a section before placing asphalt surface course.
- D. Promptly correct surface irregularities in paving course behind paver. Use suitable hand tools to remove excess material forming high spots. Fill depressions with hot-mix asphalt to prevent segregation of mix; use suitable hand tools to smooth surface.
- E. Protect installed curb, walls, and other improvements, during paving operations. Repair/replace/reset any item/ curb damaged during paving operation. Joint between bituminous pavement shall be of equal density to other areas of pavement.
- F. If the asphalt surface course is not installed immediately after the binder course is installed and stabilized, the Contractor assumes all responsibility for any damage, from whatever source, which may effect the binder course. All damage to this binder course will be removed and replaced by the Contractor, at no additional cost to the Owner. The Architect shall be the sole judge of the limits and extents of pavement and subgrade to be replaced.

### 3.7 JOINTS

- A. Construct joints to ensure continuous bond between adjoining paving sections. Construct joints free of depressions with same texture, density and smoothness as other sections of hot-mix asphalt course.
  1. Clean contact surfaces and apply tack coat.
  2. Offset longitudinal joints in successive courses a minimum of 12 inches.

3. Offset transverse joints in successive courses a minimum of 24 inches.
4. Construct transverse joints by bulkhead method or sawed vertical face method as described in AI's "The Asphalt Handbook".
5. Compact joints as soon as hot-mix asphalt will bear roller weight without excessive displacement.
6. Compact asphalt at joints to a density within 2 percent of specified course density.

### 3.8 COMPACTION

- A. General: Begin compaction as soon as place hot-mix paving will bear roller weight without excessive displacement. Compact hot-mix paving with hot, hand tampers or vibratory-plate compactors in area inaccessible to rollers.
  1. Complete compaction before mix temperature cools to 185 deg F.
- B. Breakdown Rolling: Accomplish breakdown or initial rolling immediately after rolling joints and outside edge. Examine surface immediately after breakdown rolling for indicated crown, grade, and smoothness. Repair surfaces by loosening displaced material, filling with hot-mix asphalt, and re-rolling to required elevations.
- C. Intermediate Rolling: Begin intermediate rolling immediately after breakdown rolling, while hot-mix is still hot enough to achieve specified density. Continue rolling until hot-mix asphalt course has been uniformly compacted to the following density:
  1. Average Density: 96 percent of reference laboratory density according to AASHTO T245 but not less than 94 percent nor greater than 100 percent.
  2. Average Density: 92 percent of reference maximum theoretical density according to ASTM D 2041, but not less than 90 percent nor greater than 96 percent.
- D. Finish Rolling: finish roll paved surfaces to remove roller marks while hot-mix asphalt is still warm.
- E. Edge Shaping: While surface is being compacted and finished, trim edges of pavement to proper alignment. Bevel edges while still hot, with back of rake or smooth iron. Compact thoroughly using tamper or other satisfactory method. Raveled or untamped edges will not be accepted.
- F. Repairs: Remove paved areas that are defective or contaminated with foreign materials. Remove paving course over area affected and replace with fresh, hot-mix asphalt. Compact by rolling to specified density and surface smoothness.
- G. Protection: After final rolling, do not permit vehicular traffic on pavement until it has cooled and hardened, and in no case sooner than 8 hours.
- H. Erect barricades to protect paving from traffic until mixture has cooled enough not to become marked.

### 3.9 INSTALLATION TOLERANCES

- A. Thickness: Compact each course to produce a surface smoothness within the following tolerances:
  - 1. Base Course: Plus  $\frac{1}{2}$  inch, no minus.
  - 2. Surface Course:  $\frac{1}{4}$  inch, no minus.
- B. Surface Smoothness: Compact each course to produce a surface smoothness within the following tolerances as determined by using a 10-foot straightedge applied transversely or longitudinally to paved areas:
  - 1. Base Course:  $\frac{1}{4}$  inch.
  - 2. Surface Source:  $\frac{1}{8}$  inch
  - 3. Crowned Surfaces: Test with crowned template centered and at right angle to crown. Maximum allowable variance form template is  $\frac{1}{4}$  inch. In no case will water be allowed to puddle or stand on any finished pavement.
  - 4. Ribbons/waves in longitudinal runways will not be accepted. Replace as directed.

### 3.10 PAVEMENT MARKINGS

- A. Do not apply pavement markings until layout, colors, and placement and pavement conditions have been approved by the Architect. Conform to Form 816, Section 12.09 and the manufacturer's recommendations and instructions for application. Remove existing lines from remaining pavements as required and approved by Owner. Painting out lines is not acceptable.
- B. Allow paving to cure for a minimum of 14 days or per manufacturer's requirements before starting pavement marking.
- C. Thoroughly sweep and clean surface to eliminate loose material and dust.
- D. Apply paint with mechanical equipment to produce pavement markings of dimensions indicated with uniform, straight edges. Avoid fogging and overspray. Note specific dimensions and layout requirements for markings:
  - 1. Parking Spaces – 4" wide.
  - 2. Handicap Symbol – 2" wide.
  - 3. Diagonal Aisle Stripping – 4" wide, 3' on center.
- E. Apply preformed thermoplastic crosswalks and stop bars, through the use of heat, in accordance with manufacturer's instructions.
- F. After applying paint, erect suitable barriers to prevent tracking of paint before drying. Retouch and paint all marking which become smeared, discolored, worn, or otherwise marred before final acceptance of the project. Remove any evidence of smearing of paint.

### 3.11 FIELD QUALITY CONTROL

- A. Testing Agency: Owner will engage a qualified independent testing agency to perform field inspections and tests and to prepare test reports.

1. Testing agency will conduct and interpret tests and state in each report whether tested Work complies with or deviates from specified requirements.
- B. Additional testing, at Contractor's expense, will be performed to determine compliance of corrected Work with specified requirements.
- C. Thickness: In-place compacted thickness of hot-mix asphalt course will be tested for compliance with smoothness tolerances.
- D. Surface Smoothness: Finished surface of each hot-mix asphalt course will be tested for compliance with smoothness tolerances.
- E. In-Place Density: Samples of uncompacted paving mixtures and compacted pavement and will be secured by testing agency according to ASTM D 979.
  1. Reference laboratory density will be determined by averaging results from 4 samples of hot-mix asphalt-paving mixture delivered daily to site, prepared according to ASTM D 1559, and compacted according to job-mix specifications.
  2. In-place density of compacted pavement will be determined by testing core samples according to ASTM D 1188 or ASTM D 2726.
- F. Remove and replace or install additional hot-mix asphalt where test results or measurements indicate that it does not comply with specified requirements.

END OF SECTION 32 12 16

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**

## **SECTION 32 12 17 — POROUS ASPHALT PAVEMENT**

### **PART 1 – GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### **1.2 SCOPE OF WORK**

- A. Work shall consist of the construction of all porous bituminous asphalt and related work, as indicated on the Contract Drawings and as specified herein. Porous Bituminous Asphalt work shall include, but not be limited to the following:
  - a. Subgrade preparation.
  - b. Construction of infiltration beds and placement of perforated pipes and geotextile.
  - c. Construction of porous bituminous asphalt surface course.

#### **1.3 REFERENCE STANDARDS**

- A. The compacted subgrade and subbase will be subject to testing by an Independent Testing and Inspection Agency to assure proper compaction as described in the Earthwork Specifications.

#### **1.4 SUBMITTALS**

- A. Mix Formula: The Contractor shall supply the Owner, prior to construction, a mix formula for the type of porous bituminous asphalt specified.

### **PART 2 - PRODUCTS**

#### **2.1 MATERIALS**

- A. Infiltration Bed — Infiltration bed shall be of the thickness specified on the drawings and consist of uniformly graded coarse aggregate, with a wash loss of no more than 0.5%.
- B. Non-Woven Geotextile — Non-Woven Geotextile shall consist of needle nonwoven polypropylene fibers and need the following properties:

Grab Tensile Strength (ASTM -D 4632) 120 lbs

Mullen Burst Strength (ASTM -D 3786) 225 psi

Flow Rate (ASTM -D 4491) 95 gal/m in/ft<sup>2</sup>

UV Resistance after 500 hours (ASTM -D 4355) 70%

Heat-set or heat-calendared fabrics are not permitted.

Acceptable types include Mirafi 140N, Amoco 4547, Geotex 451, or approved equals.

- C. Perforated Pipe — Continuously perforated PVC pipe with a smooth interior, and a minimum inside diameter of 6-inches.
- D. Porous Bituminous Asphalt — Bituminous surface course for porous paving shall be of the thickness specified on the drawings with a bituminous mix of 5.75% to 6% by weight dry aggregate. In accordance with ASTM D 6390, drain down of the binder shall be no greater than 0.3%. If more absorptive aggregates, such as limestone, are used in the mix, then the amount of bitumen is to be based on the testing procedures outlined in the National Asphalt Pavement Association's Information Series 131 — "Porous Asphalt Pavements" (2003) or ConnDOT equivalent.

### PART 3 - EXECUTION

#### 3.1 PREPARATION OF SUBGRADE

- A. The Contractor shall fine grade the subgrade to within 0.05 ft of the lines and grades shown on the Contract Drawings. The Contractor must take special care in areas where utilities may be at a minimum cover.
- B. After the subgrade has been fine graded, the existing subgrade shall NOT be compacted or subjected to excessive construction equipment traffic prior to geotextile and infiltration bed placement.
- C. The subgrade shall be prepared after all utilities and other subsurface structures have been placed and the backfill has been properly placed and compacted.
- D. The subgrade shall not be prepared during freezing weather or when frozen, or when it is unstable because of excessive moisture.
- E. When completed, the subgrade shall be at the proper grade and contour, even and free from depressions that may form water pockets. The subgrade shall be so maintained until the pavement is placed. Where erosion of subgrade has caused accumulation of fine materials and or surface ponding, this material shall be removed with light equipment and the underlying soils scarified to a minimum depth of 6-inches with a York rake (or equivalent) and light tractor. All fine grading shall be done by hand.

#### 3.2 CONSTRUCTION OF INFILTRATION BED

- A. Infiltration Bed shall not be constructed when the subgrade is frozen or when the subgrade is soft or unstable. Infiltration Bed shall not be constructed during rainy or freezing weather or with frozen material.
- B. The clean aggregate shall be placed in maximum 8-inch lifts, lightly compacted with a maximum 10-ton roller, and graded to within + 1/2 inch of the sections and grades shown on the Contract Drawings.



- C. The Contractor shall be responsible for the protection of adjacent structures in or above the proposed subgrade to preclude any damages during placement or compaction.
- D. Should the infiltration bed material become contaminated or for any reason become unsuitable prior to placement, the Contractor shall correct or replace the aggregate with satisfactory aggregate at no additional expense.

### 3.3 NON-WOVEN GEOTEXTILE

- A. Geotextile shall be placed immediately after approval of subgrade preparation. Geotextile is to be placed in accordance with manufacturer's standards and recommendations. Adjacent strips of geotextile shall overlap a minimum of 16 inches. It shall be secured at least 4 feet outside of the bed in order to prevent any runoff or sediment from entering the storage bed. The edge strip shall remain in place until all bare soils contiguous to beds are stabilized and vegetated. Excess geotextile along the edges can be cut back to the gravel edge once the site is fully stabilized.

### 3.4 PERFORATED PIPE

- A. Pipes shall be placed along the bed bottom parallel to the pavement surface.

### 3.5 POROUS BITUMINOUS ASPHALT

- A. Use neat asphalt binder modified with an elastomeric polymer to produce a binder meeting the requirements of PG 76-22 as specified in AASHTO M320. The elastomer polymer shall be styrenebutadiene-styrene (SBS), or approved equal, applied at a rate of 3% by weight of the total binder. The composite materials shall be thoroughly blended at the asphalt refinery or terminal prior to being loaded into the transport vehicle. The polymer modified asphalt binder shall be heat and storage stable.
- B. Add hydrated lime at dosage rate of 1.0% by weight of the total dry aggregate to mixes containing granite. Hydrated lime shall meet the requirements of ASTM C977. The additive must be able to prevent the separation of the asphalt binder from the aggregate and achieve a required tensile strength ratio (TSR) of at least 80% on the asphalt mix when tested in accordance with AASHTO T 283. The asphaltic mix shall be tested for its resistance to stripping by water in accordance with ASTM D -1664. If the estimated coating area is not above 95 percent, anti-stripping agents shall be added to the asphalt.
- C. Porous pavement shall not be installed on wet surfaces or when the ambient air temperature is 50 degrees Fahrenheit or lower. The temperature of the bituminous mix shall be between 300 degrees Fahrenheit and 350 degrees Fahrenheit (based on the recommendations of the asphalt supplier).

## PART 4 - MAINTENANCE

4.1 INSPECTION

- A. The surface shall be inspected several times within the first few months after construction. It shall also be inspected after large storms for surface ponding and clogging. All trash and debris observed during these inspections shall be removed.

4.2 SURFACE MAINTENANCE

- A. The surface shall be vacuumed twice per year with a commercial cleaning unit.
- B. The contractor shall not allow construction staging, soil/mulch storage, etc. on unprotected pavement surface.
- C. Planted areas adjacent to porous pavement shall be well maintained to prevent soil washout onto the pavement
- D. Do not apply abrasives such as sand or cinders on or adjacent to porous pavement during snow/ice removal.

4.3 REPAIR

- A. The surface shall be repaired using a conventional, non-porous patching mix if the damaged area is less than 50 square feet. Larger areas should be patched with approved porous asphalt.

END OF SECTION 32 12 17

## SECTION 32 13 13 – CONCRETE PAVING

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### 1.2 SUMMARY

- A. This Section includes exterior cast-in-place concrete pavement and cast-in-place curbs for the following:
  - 1. Concrete Curbing.
  - 2. Reinforced Concrete Slabs.
  - 3. Integral Concrete Curbs and Walkways.
  - 4. Joint Treatments.
  - 5. Pavement Markings.
  - 6. Concrete salt guard.
- B. Related Sections include the following:
  - 1. Division 31 Section “Earth Moving”.
  - 2. Division 32 Section “Asphalt Paving”.
  - 3. Division 32 Section “Precast Concrete Curbs”.

#### 1.3 DEFINITIONS

- A. Cementitious Materials: Portland cement alone or in combination with one or more of blended hydraulic cement, expansive hydraulic cement, fly ash and other pozzolans, ground granulated blast-furnace slag, and silica fume.
- B. Form 816: “Standard Specifications for Roads, Bridges and Incidental Construction”, State of Connecticut, Department of Transportation, Form 816, 2004 edition, with 2005 supplement.

#### 1.4 SUBMITTALS

- A. Product Data: For each type of manufactured material and product indicated.
- B. Design Mixes: For each concrete mix. Include alternate mix designs when characteristics of materials project conditions, weather, test results, or other circumstances warrant adjustments.
- C. Batch slips certifying concrete mix, air content, slump, and time of loading.

- D. Material Test Reports: From a qualified testing agency indicating and interpreting test results for compliance of the following with requirements indicated, based on comprehensive testing of current materials:
- E. Material Certificates: Signed by manufacturers certifying that each of the following materials complies with requirements:
  - 1. Cementitious materials and aggregate.
  - 2. Steel reinforcement and reinforcement accessories.
  - 3. Fiber reinforcement.
  - 4. Admixtures.
  - 5. Curing compounds.
  - 6. Applied finish materials.
  - 7. Bonding agent or adhesive.
  - 8. Joint fillers and sealants.
- F. Shop Drawings of all score and expansion joint layouts. All layouts shall include conformance to requirements of colored concrete patterns and project requirements.
- G. Submit Sample and data on plastic slip dowel system.

#### 1.5 QUALITY ASSURANCE

- A. Installer Qualifications: An experienced installer who has completed pavement work similar in material, design, and extent to that indicated for this Project and whose work has resulted in construction with a record of successful in-service performance.
- B. Manufacturer Qualifications: Manufacturer of ready-mixed concrete products complying with ASTM C 94 requirements for production facilities and equipment.
  - 1. Manufacturer must be certified according to the National Ready Mix Concrete Association's Plant Certification Program.
- C. Testing Agency Qualifications: An independent testing agency, acceptable to authorities having jurisdiction, qualified according to ASTM C 1077 and ASTM E 329 to conduct the testing indicated, as documented according to ASTM E 548.
- D. Source Limitations: Obtain each type or class of cementitious material of the same brand from the same manufacturer's plant and each aggregate from one source.
- E. ACI Publications: comply with ACI 301, "Specification for Structural Concrete", unless modified by the requirements of the Contract Documents.
- F. Concrete Testing Service: Engage a qualified independent testing agency to perform material evaluation tests and to design concrete mixes.
- G. Mockups: Cast mockups of full-size (minimum 12' long) sections of each type of concrete pavement to demonstrate typical joints surface finish, texture, and standard of workmanship.

1. Build mockups in the location and of the size indicated or, if not indicated, as directed by Architect.
  2. Obtain Architect's approval of mockups prior to pavement construction.
  3. Maintain approved mockups during construction in an undisturbed condition as a standard for judging the completed pavements. Demolish mockups after acceptance of work.
  4. Approved mockups may not be part of the completed work.
- H. Comply with requirements of Form 816, Article M.03.
- I. Walks, parking spaces and loading zones constructed for use by persons with accessibility challenges shall conform to the applicable portions of the Americans With Disability Act Accessibility Guidelines (ADA) and the Connecticut State Building Code.
- J. Detectable warning surfaces must be installed as shown on the Construction Documents, in accordance with the Americans with Disabilities Act Accessibility Guidelines. The outside 24 inches of flush walkways shall contain a truncated-dome tactile surface, of contrasting color to the walk surface, 6 inches back from the curb line, for the full width of the flush surface.
- K. Pre-installation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Meetings".
1. Before submitting design mixes, review concrete pavement mix design and examine procedures for ensuring quality of concrete materials. Require representatives of each entity directly concerned with concrete pavement to attend, including the following:
    - a. Contractor's superintendent.
    - b. Independent testing agency responsible for concrete design mixes.
    - c. Ready mix concrete producer.
    - d. Concrete subcontractor.

## 1.6 PROJECT CONDITIONS

- A. Traffic Control: Maintain access for vehicular and pedestrian traffic as required for other construction activities. Provide temporary barricades and warning lights as required.

## PART 2 - PRODUCTS

### 2.1 FORMS

- A. Form Materials: Plywood, metal, metal-framed plywood, or other approved panel-type materials to provide full-depth, continuous, straight, smooth exposed surfaces.
1. Use flexible or curved forms for curves of a radius 100 feet or less.
- B. Form-Release Agent: Commercially formulated form-release agent that will not bond with, stain, or adversely affect concrete surfaces and will not impair subsequent treatments of concrete surfaces. Conform to all State and local requirements for levels of toxicity.

## 2.2 STEEL REINFORCEMENT

- A. Epoxy-Coated Welded Wire Fabric: ASTM A 884/A 884M, Class A, plain steel. Flat sheets required.
- B. Reinforcement Bars: ASTM A 615/A 615M, Grade 60, deformed.
- C. Steel Bar Mats: ASTM A 184/A 184M; with ASTM A 615/A 615M, Grade 60, deformed bars; assembled with clips.
- D. Joint Dowel Bars: Galvanized smooth steel dowels, ASTM A 615/A 615M, Grade 60. Cut dowels true to length with ends square and free of burrs. Provide polypropylene plastic slip dowel sleeves system. System shall be similar to “speed dowel” by Aztec Concrete Accessories, or approved equal.
- E. Tie Bars: ASTM A 615/A, Grade 60, deformed.
- F. Hook Bolts: ASTM A 307, Grade A, internally and externally threaded. Design hook-bolt joint assembly to hold coupling against pavement form and in position during concreting operations, and to permit removal without damage to concrete or hook bolt.
- G. Bar Supports: Bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening reinforcement bars, welded wire fabric, and dowels in place. Manufacture bar supports according to CRSI’s “Manual of Standard Practice” from steel wire, plastic, or precast concrete or fiber-reinforced concrete of greater compressive strength than concrete, and as follows:
  - 1. Equip wire bar supports with sand plates or horizontal runners where base material will not support chair legs.
  - 2. For epoxy-coated reinforcement, use epoxy or other dielectric-polymer coated wire bar supports.
- H. Epoxy Repair Coating: Liquid two-part epoxy repair coating, compatible with epoxy coating on reinforcement.

## 2.3 CONCRETE MATERIALS

- A. General: Use the same brand and type of cementitious material from the same manufacturer throughout the Project. Batch mixing at site not acceptable.
- B. Compressive Strength: Minimum 4,000 psi at 28 days.
- C. Portland Cement: ASTM C 150, Type I or II.
- D. Aggregate: ASTM C 33, uniformly graded, from a single source, with coarse aggregate as per Form 816, Article M.03.01, Class “F”.
  - 1. Do not use fine or coarse aggregates containing substances that cause spalling.
- E. Water: ASTM C 94.

## 2.4 ADMIXTURES

- A. General: Admixtures certified by manufacturer to contain not more than 0.1 percent water-soluble chloride ions by mass of cement and to be compatible with other admixtures.
- B. Air-Entraining Admixture: ASTM C 260, 5-6%.
- C. Water-Reducing Admixture: ASTM C 494, Type A.
- D. High-Range, Water-Reducing Admixture: ASTM C 494, Type F.
- E. Water Reducing and Accelerating Admixture: ASTM C 494, Type E.
- F. Water Reducing and Retarding Admixture: ASTM C 494, Type D.

## 2.5 CURING MATERIALS

- A. Absorptive Cover: AASHTO M 182, Class 2, burlap cloth made from jute or kenaf, weighing approximately 9 oz./sq. yd. dry.
- B. Moisture-Retaining Cover: White polyethylene film or white burlap polyethylene sheet, ASTM C171; or resin-based, clear emulsion liquid dissipating cure which will not discolor the concrete, conforming to ASTM C309 Type I of ID, Class A & B and AASHTO M-148.
- C. Water: Potable

## 2.6 RELATED MATERIALS

- A. Expansion and Isolation Joint Filler Strips: ASTM D 1751, asphalt saturated, cellular fibers, as manufactured by Sealtight, W.R. Meadows, or approved equal.
  - 1. Thickness – one-half inch.
  - 2. Depth – to match full section of concrete pavement/curb.
- B. Removable Vinyl Joint Cap Strips: Compatible with filler strips width , as manufactured by Vinylex Corp. or approved equal. Provide in lengths equal to lengths of filler strips.
- C. Joint Sealer: Compatible with filler strips, two component polyurethane elastomeric type complying with FS-TT-S-00227, self leveling designed for pedestrian and vehicular traffic, as manufactured by Sika, Percora, or approved equal. Include primer and backing rods as required.
  - 1. Type: Class II, non-load bearing, for bonding freshly mixed to hardened concrete.
  - 2. Type: Class I and II, non-load bearing, for bonding hardened or freshly mixed concrete to hardened concrete.
  - 3. Type: Class IV and V, load bearing, for bonding hardened or freshly mixed concrete to hardened concrete.

## 2.7 CONCRETE MIXES

- A. Prepare design mixes, proportioned according to ACI 211.1 and ACI 301, for each type and strength of normal weight concrete determined by either laboratory trial mixes or field experience.
- B. Use a qualified independent testing agency for preparing and reporting proposed mix designs for the trial batch method.
  - 1. Do not use Owner's field quality-control testing agency as the independent testing agency.
- C. Proportion mixes to provide concrete with the following properties:
  - 1. Compressive Strength (28 Days): 4000 psi.
  - 2. Maximum Water-Cementitious Materials Ratio: 0.45.
  - 3. Slump Limit: 3 inches.
  - 4. Sacks of Cement (minimum): 7 sacks per cubic yard.
- D. Cementitious Materials: Limit percentage, by weight, of cementitious materials other than Portland cement according to ACI 301 requirements for concrete exposed to deicing chemicals.

## 2.8 CONCRETE MIXING

- A. Ready-Mixed Concrete: Comply with requirements and with ASTM C 94, and Form 816.

## 2.9 AUXILLARY MATERIALS

- A. Pavement Markings:
  - 1. Parking lines, stop bars, Handicap Symbols and aisles: Fast Drying White Traffic Paint, per Form 816, Section M.07.20.
  - 2. Crosswalks: retro reflective thermoplastic preformed material, 90 mils thick, consisting of a homogeneous mixture of high quality polymeric thermoplastic binders, pigments, fillers and glass beads. Materials shall conform to AASHTO, M249-79 (86) except for material being preformed. Color shall be white.
- B. Driveway center lines (two-way traffic): Fast drying yellow traffic paint, as per Form 816, Section M.07.20.

## PART 3 - EXECUTION

### 3.1 PREPARATION

- A. Proof-roll prepared surface to check for unstable areas and verify need for additional compaction. Proceed with pavement only after nonconforming conditions have been corrected and sub grade is ready to receive pavement. Do not install concrete over saturated, muddy or frozen base.
- B. Remove loose material from compacted base surface immediately before placing concrete.



### 3.2 EDGE FORMS AND SCREED CONSTRUCTION

- A. Set, brace, and secure edge forms, bulkheads, and intermediate screed guides for pavement and curbs to required lines, grades, and elevations. Install forms to allow continuous progress of work and so forms can remain in place at least 24 hours after concrete placement. At points where change of grades is more than 2% introduce approved vertical curve. No abrupt changes in grade will be accepted.
- B. Clean forms after each use and coat with form release agent to ensure separation from concrete without damage.
- C. Curb forms to be true to horizontal and vertical alignment. Forms to be true to radiuses specified.

### 3.3 STEEL REINFORCEMENT

- A. General: Comply with CRSI's "Manual of Standard Practice" for fabricating reinforcement and with recommendations in CRSI's "Placing Reinforcing Bars" for placing and supporting reinforcement.
  - 1. Apply epoxy repair coating to uncoated or damaged surfaces of epoxy-coated reinforcement.
- B. Clean reinforcement of loose rust and mill scale, earth, ice, or other bond-reducing materials.
- C. Arrange, space, and securely tie bars and bar supports to hold reinforcement in position during concrete placement. Maintain minimum cover to reinforcement.
- D. Install welded wire fabric in lengths as long as practicable. Lap adjoining pieces at least one full mesh, and lap splices with wire. Offset laps of adjoining widths to prevent continuous laps in either direction.
- E. Install fabricated bar mats in lengths as long as practicable. Handle units to keep them flat and free of distortions. Straighten bends, kinks, and other irregularities, or replace units as required before placement. Set mats for a minimum 2-inch overlap to adjacent mats.

### 3.4 JOINTS

- A. General: Construct construction, expansion, score joints, and tool edgings true to line with faces perpendicular to surface plane of concrete. Construct transverse joints at right angles to centerline, unless otherwise indicated.
  - 1. When joining existing pavement, place transverse joints to align with previously placed joints, unless otherwise indicated.
- B. Expansion Joints: Form isolation joints of preformed joint-filler strips abutting concrete curbs, catch basins, manholes, inlets, structures, walks, other fixed objects, and where indicated. Approval required prior to pour.

1. Locate expansion joints at intervals of 20 feet maximum, unless otherwise indicated.
  2. Extend joint fillers full width and depth of joint.
  3. If joint sealant is indicated, install removable vinyl cap strips and set top of cap strip flush with finished concrete surface.
  4. Place top of joint filler flush with finished concrete surface if joint sealant is not indicated.
  5. Furnish joint fillers in one-piece lengths. Where more than one length is required, lace or clip joint-filler sections together.
  6. Protect top edge of joint filler during concrete placement with metal cap after concrete has been placed on both side of joint.
  7. Install dowel bars and support assemblies at joints where and as indicated.
- C. Construction Joints: Set construction joints at side and end terminations of pavement and at locations where pavement operations are stopped for more than one-half hour, unless pavement terminates at isolation joints.
1. Provide preformed galvanized steel or plastic keyway-section forms or bulkhead forms with keys, unless otherwise indicated. Embed keys at least 1-1/2 inches into concrete.
  2. Continue reinforcement across construction joints, unless otherwise indicated. Do not continue reinforcement through sides of pavement strips, unless otherwise indicated.
  3. Provide tie bars at sides of pavement strips where indicated.
  4. Use a bonding agent at locations where fresh concrete is placed against hardened or partially hardened concrete surfaces.
  5. Use epoxy bonding adhesive at locations where fresh concrete is placed against hardened or partially hardened concrete surfaces.
- D. Score Joints: Form weakened-plane contraction joints, sectioning concrete into areas as indicated. Construct contraction joints for a depth equal to at least one-fourth of the concrete thickness, as follows:
1. Grooved Joints: Form contraction joints after initial floating by grooving and finishing each edge of joint with groover tool to the following radius. Repeat grooving of contraction joints after applying surface finishes. Eliminate groover marks (tool wings) on concrete surfaces. Maximum spacing 6'0" in any direction. Areas of concrete sidewalk replacement shall be patterned to match existing pavement. Joints shall be straight or true to radius shown – poor workmanship is just cause for rejection of pavement.
    - a. Radius: ¼ inch.
  2. Sawed Joints: Form contraction joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8-inch wide joints into concrete when cutting action will not tear, abrade, or otherwise damage surface and before developing random contraction cracks.
- E. Edging: Tool edges of pavement, gutters, curbs, and joints in concrete after initial floating with an edging tool to the following radius. Repeat tooling of edges after applying surface finishes. Eliminate tool marks on concrete surfaces.
1. Radius: ¼ inch.

- F. Rub all exposed vertical faces of curbs to eliminate blemishes, pockmarks, honeycombing, and all other defects. Plastering is not permitted.

### 3.5 CONCRETE PLACEMENT

- A. Inspection: Before placing concrete, inspect and complete formwork installation, reinforcement steel, and items to be embedded or cast in. Notify other trades to permit installation of their work. Protect adjacent work from damage, splatter, and all other concrete operations.
- B. Remove snow, ice, or frost from sub base surface and reinforcement before placing concrete. Do not place concrete on frozen surfaces.
- C. Moisten sub base to provide a uniform dampened condition at the time concrete is placed. Do not place concrete around manholes or other structures until they are at the required finish elevation and alignment.
- D. Comply with requirements and with recommendations in ACI 304R for measuring, mixing, transporting, and placing concrete.
- E. Do not add water to concrete during delivery, at Project site, or during placement, unless approved by Engineer.
- F. Deposit and spread concrete in a continuous operation between transverse joints. Do not push or drag concrete into place or use vibrators to move concrete into place.
- G. Consolidate concrete by mechanical vibrating equipment supplemented by hand spading, rodding, or tamping. Use equipment and procedures to consolidate concrete according to recommendations in ACI 309R.
  - 1. Consolidate concrete along face of forms and adjacent to transverse joints with an internal vibrator. Keep vibrator away from joint assemblies, reinforcement, or side forms. Use only square-faced shovels for hand spreading and consolidation. Consolidate with care to prevent dislocating reinforcement, dowels, and joint devices.
- H. Place concrete in two operations; strike off initial pour for entire width of placement and to the required depth below finish surface. Lay welded wire fabric or fabricated bar mats immediately in final position. Place top layer of concrete, strike off, and screed.
  - 1. Remove and replace portions of bottom layer of concrete that have been placed more than 15 minutes without being covered by top layer, or use bonding agent if approved by Architect.
- I. Screed pavement surfaces with a straightedge and strike off. Commence initial floating using bull floats or darbies to form an open textured and uniform surface plane before excess moisture or bleed water appears on the surface. Do not further disturb concrete surfaces before beginning finishing operations or spreading dry-shake surface treatments.
- J. Cold-Weather Placement: Comply with ACI 306.1 and as follows. Protect concrete work from physical damage or reduced strength that could be caused by frost, freezing actions, or low temperatures.

1. When air temperature has fallen to or is expected to fall below 40 deg F, uniformly heat water and aggregates before mixing to obtain a concrete mixture temperature of not less than 50 deg F and not more than 80 deg F at point of placement.
  2. Do not use frozen materials or materials containing ice or snow.
  3. Do not use calcium chloride, salt, or other materials containing antifreeze agents or chemical accelerators, unless otherwise specified and approved in mix designs.
- K. Hot-Weather Placement: Place concrete according to recommendations in ACI 305R and as follows when hot-weather conditions exist:
1. Cool ingredients before mixing to maintain concrete temperature at time of placement below 90 deg F. Chilled mixing water or chopped ice may be used to control temperature, provided water equivalent of ice is calculated to total amount of mixing water. Using liquid nitrogen to cool concrete is Contractor's option.
  2. Cover reinforcement steel with water-soaked burlap so steel temperature will not exceed ambient air temperature immediately before embedding in concrete.
  3. Fog-spray forms, reinforcement steel, and sub grade just before placing concrete. Keep sub grade moisture uniform without standing water, soft spots, or dry areas.

### 3.6 CONCRETE FINISHING

- A. General: Wetting of concrete surfaces during screeding, initial floating, or finishing operations is prohibited.
- B. Float Finish: Begin the second floating operation when bleed-water sheen has disappeared and the concrete surface has stiffened sufficiently to permit operations. Float surface with power driven floats, or by hand floating if area is small or inaccessible to paver units. Finish surfaces to true planes. Cut down high spots, and fill low spots. Rfloat surface immediately to uniform granular texture.
1. Medium-to-Fine-Textured Broom Finish: Draw a soft bristle broom across float-finished concrete surface perpendicular to line of traffic to provide a uniform, fine-line texture (standard). Provide cleanly finished fine textured broom finish on all colored concrete pavements including varying directions of the brooming.
  2. Medium-to-Coarse-Textured Broom Finish: Provide a coarse finish by striating float-finished concrete surface 1/16 to 1/8 inch deep with a stiff-bristled broom, perpendicular to line of traffic (handicap access ramps).
- C. Detectable Warning Surface Tile: Complete installation of concrete surface finish in accordance with these specifications.
1. The factory-installed plastic sheeting must remain in place during the entire installation process, to prevent the splashing of concrete onto the finished surface of the tile.
  2. When preparing to set the tile, it is important that NO concrete be removed in the area to accept the tile. It is imperative that the installation technique eliminates any air voids under the tile. Holes around the tile perimeter allow air to escape during the installation process. Concrete will flow through the large holes in each vane on the underside of the tile. This will lock the tile solidly into the cured concrete.
  3. The concrete shall be poured and finished true and smooth to the required dimensions and slope prior to the tile placement. Immediately after finishing concrete, an electronic level

should be used to check that the required slope is achieved. The tile shall be placed true and square to the curb edge in accordance with the contract drawings. The Cast-In-Place Tiles shall be tamped (or vibrated) into the fresh concrete to ensure that the field level of the tile is flush to the adjacent concrete surface. The contract drawings indicate that the tile field level (base of truncated dome) is flush to adjacent surfaces to permit proper water drainage and eliminate tripping hazards between adjacent finishes.

4. Immediately after tile placement, the tile elevation is to be checked to adjacent concrete. The tile elevation and slope should be set consistent with contract drawings to permit water drainage to curb as the design dictates.
5. While concrete is workable, a 3/8" radius edging tool shall be used to create a finished edge of concrete, then a steel trowel shall be used to float the concrete around the tile's perimeter, flush to the field level of tile.
6. During and after the tile installation and the concrete curing stage, it is imperative that there is no walking, leaning or external forces placed on the tile to rock the tile, causing a void between the underside of tile and concrete.
7. Following tile placement, review installation tolerances to contract drawings and adjust tile before the concrete sets. Two suitable weights of 25 lb each shall be placed on each tile as necessary to ensure solid contact of the underside of tile to concrete.
8. Following the curing of the concrete, protective plastic wrap is to be removed from the tile face by cutting the plastic with a sharp knife, tight to the concrete/tile interface. If concrete bled under the plastic, a soft wire brush will clean the residue without damage to the tile surface.

### 3.7 CONCRETE PROTECTION AND CURING

- A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures. Comply with Form 816, Section 4.01.03, and ACI 306.1 for cold-weather protection and follow recommendations in ACI 305R for hot-weather protection during curing.
- B. Evaporation Retarder: Apply evaporation retarder to concrete surfaces if hot, dry, or windy conditions cause moisture loss approaching 0.2 lb/sq. ft. x h before and during finishing operations. Apply according to manufacturers written instructions after placing, screeding, and bull floating or darbying concrete, but before float finishing.
- C. Begin curing after finishing concrete, but not before free water has disappeared from concrete surface.
- D. Curing Methods: Cure concrete by moisture curing, moisture-retaining-cover curing, or a combination of these as follows:
  1. Moisture Curing: Keep surfaces continuously moist for not less than seven days with the following materials:
    - a. Water.
    - b. Continuous water-fog spray.
    - c. Absorptive cover, water saturated, and kept continuously wet. Cover concrete surfaces and edges with 12-inch lap over adjacent absorptive covers.
  2. Moisture-Retaining-Cover Curing: Cover concrete surfaces with moisture-retaining cover for curing concrete, placed in widest practicable width, with sides and ends lapped

at least 12 inches, and sealed by waterproof tape or adhesive. Immediately repair any holes or tears during curing period using cover material and waterproof.

### 3.8 PAVEMENT TOLERANCES

#### A. Comply with tolerances of ACI 117 and as follows:

1. Elevation:  $\frac{1}{4}$  inch.
2. Thickness: Plus  $\frac{3}{8}$  inch, minus  $\frac{1}{4}$  inch.
3. Surface: Gap below 10-foot long, unlevelled straightedge not to exceed  $\frac{1}{4}$  inch.
4. Lateral Alignment and Spacing of Tie Bars and Dowels: 1 inch.
5. Vertical Alignment of Tie Bars and Dowels:  $\frac{1}{4}$  inch.
6. Alignment of Tie-Bar End Relative to Line Perpendicular to Pavement Edge: Length of dowel  $\frac{1}{4}$  inch per 12 inches.
7. Alignment of Dowel-Bar End Relative to Line Perpendicular to Pavement Edge: Length of dowel  $\frac{1}{4}$  inch per 12 inches.
8. Joint Spacing: 3 inches.
9. Contraction Joint Depth: Plus  $\frac{1}{4}$  inch, no minus.
10. Joint Width: Plus  $\frac{1}{8}$  inch, no minus.

B. Cross slope of pavement is 2.0% unless otherwise indicated. In no case will water be allowed to stand or puddle on any finished pavement.

C. Cross slope of pavements in all areas designated as an accessible route or for use by handicapped individuals will not exceed 2%.

### 3.9 JOINT AND CONCRETE SEALANT INSTALLATION

A. Apply a deep penetrating water and salt barrier such as Consolideck Saltguard WB as manufactured by Prosoco Inc. Clean all concrete prior to application as per manufacturer's recommendations. Do not dilute material. Apply evenly with sprayer or roller in a single saturating coat per mfr. Application shall be enough to keep surface wet for 2-3 minutes before penetrating. Do not over apply. Coverage rates may vary based on porosity and texture.

B. Install joint sealants in all expansion joints in accordance with the manufacturer's installation instructions. Clean and prime joints. Remove dirt and loose coatings.

C. Apply sealant in continuous beads, without open joints, voids, or air pockets. Hand tool and finish all joints.

D. Confine materials to joint areas with masking tape or other precautions. Insure joint sealing is cleanly executed with no override onto adjacent pavement.

E. Remove excess compound promptly as work progresses and clean adjoining surfaces. Protect until full cured.

F. In rough surfaces of joints of uneven widths, hold joint sealant well back into joints.

### 3.10 FIELD QUALITY CONTROL

- A. Testing Agency: Owner will engage a qualified testing and inspection agency to sample materials, perform tests, and submit test reports during concrete placement. Sampling and testing for quality control may include those specified in this Article.
- B. Testing Services: Testing shall be performed according to the following requirements:
1. Sampling Fresh Concrete: Representative samples of fresh concrete shall be obtained according to ASTM C172, except modified for slump to comply with ASTM C 94.
  2. Slump: ASTM C 143; one test at point of placement for each compressive-strength test, but not less than one test for each day's pour of each type of concrete. Additional tests will be required when concrete consistency changes.
  3. Air Content: ASTM C 231, pressure method; one test for each compressive-strength test, but not less than one test for each day's pour of each type of concrete. Additional tests will be required when concrete consistency changes.
  4. Concrete Temperature: ASTM C 1064; one test hourly when air temperature is 40 deg F and below and when 80 deg F and above, and one test for each set of compressive-strength test, unless otherwise indicated. Cylinders shall be molded and stored for laboratory-cured test specimens unless field-cured test specimens are required.
  5. Compression Test Specimens: ASTM C 31/C 31M; one set of four standard cylinders for each compressive-strength test, unless otherwise indicated. Cylinders shall be molded and stored for laboratory-cured test specimens unless field-cured test specimens are required.
  6. Compressive-Strength Tests: ASTM C 39; one set for each day's pour of each concrete class exceeding 5 cu. Yd., but less than 25 cu. Yd., plus one set for each additional 50 cu. yd. One specimen shall be tested at 7 days and two specimens at 28 days; one specimen shall be retained in reserve for later testing if required
  7. When frequency of testing will provide fewer than five compressive-strength tests for a given class of concrete, testing shall be conducted from at least five randomly selected batches or from each batch if fewer than five are used.
  8. When total quantity of a given class of concrete is less than 50 cu. yd., Architect may waive compressive-strength testing if adequate evidence of satisfactory strength is provided.
  9. When strength of field-cured cylinders is less than 85 percent of companion laboratory-cured cylinders, current operations shall be evaluated and corrective procedures shall be provided for protecting and curing in-place concrete.
  10. Strength level of concrete will be considered satisfactory if average of sets of three consecutive compressive-strength test results equal or exceed specified compressive strength and no individual compressive-strength test result falls below specified compressive strength by more than 500 psi.
  11. Contractor is to provide an as-built field survey of all surfaces designated as "Accessible Routes", "Handicapped Parking Areas" and all areas specifically designated for handicapped accessibility. Survey shall clearly document that the as-built conditions are in full compliance with the Americans With Disability Act Accessibility Guidelines (ADA) and the Connecticut State Building Code.
- C. Test results shall be reported in writing to Architect, concrete manufacturer, and Contractor within 24 hours of testing. Reports of compressive-strength tests shall contain Project identification name and number, date of concrete placement, name of concrete testing agency, concrete placement, name of concrete testing agency, concrete type and class, location of

concrete batch in pavement, design compressive strength at 28 days, concrete mix proportions and materials, compressive breaking strength, and type of break for both 7- and 28 day tests.

- D. Nondestructive Testing: Impact hammer, sonoscope, or other nondestructive device may be permitted by Architect but will not be used as the sole basis for approval or rejection.
- E. Additional Tests: Testing agency shall make additional tests for the concrete when test results indicate slump, air entrainment, concrete strengths, or other requirements have not been met, as directed by Architect. Testing agency may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C 42, or by other methods as directed.

### 3.11 REPAIRS AND PROTECTION

- A. Remove and replace concrete pavement that is broken, damaged, or defective, or does not meet requirements in this Section.
- B. Drill test cores where directed by Architect when necessary to determine magnitude of cracks or defective areas. Fill drilled core holes in satisfactory pavement areas with Portland cement concrete bonded to pavement with epoxy adhesive.
- C. Protect concrete from damage. Exclude traffic from pavement for at least 14 days after placement. When construction traffic is permitted, maintain pavement as clean as possible by removing surface stains and spillage of materials as they occur.
- D. Maintain concrete pavement free of stains, discoloration, dirt, and other foreign material. Sweep concrete pavement not more than two days before date scheduled for Substantial Completion inspections.

### 3.12 PAVEMENT MARKINGS

- A. Do not apply pavement-marking paint until layout, colors, and placement have been verified with Architect.
- B. Allow concrete pavement to cure for 28 days and be dry before starting pavement marking.
- C. Sweep and clean surface to eliminate loose material and dust.
- D. Apply paint with mechanical equipment to produce pavement markings of dimensions indicated with uniform, straight edges. Apply at manufacturer's recommended rates to provide a minimum wet film thickness of 15 mils.

END OF SECTION 32 13 13



## **SECTION 32 16 13.26 — PRECAST CONCRETE CURB**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### **1.2 SUMMARY**

- A. This Section includes the following:
  - 1. Precast concrete curb.
- B. Related Sections include the following:
  - 1. Division 01 Section “Alternates”.
  - 2. Division 32 Section “Asphalt Paving”.
  - 3. Division 32 Section “Concrete Paving”.
  - 4. Division 32 Section “Asphalt Curbs”.

#### **1.3 DEFINITIONS**

- A. Form 816: “Standard Specifications for Roads, Bridges and Incidental Construction”, State of Connecticut, Department of Transportation, Form 816, 2004 edition, with 2005 supplement.

#### **1.4 SUBMITTALS**

- A. Submit material certificates signed by the material producer and the contractor, certifying that the concrete mixture complies with the specified requirements.
- B. Submit fabrication shop drawings for approval prior to execution of the work.

### **PART 2 - PRODUCTS**

#### **2.1 PRECAST CONCRETE CURB**

- A. Form 816, Article 8.11, conforming to dimensions detailed on the drawings.
- B. For straight curbing, 80 percent of the curbs shall be furnished in lengths of not less than six feet, and the remaining 20 percent in lengths of not less than 4 feet, interspersed at random.
- C. Form 816, Sections 8.12.04 and Section 8.12.05 do not apply.

PART 3 - EXECUTION

3.1 PRECAST CONCRETE CURB

- A. Installation methods shall conform to Form 816, Section 8.12.03.
- B. Top of curb elevations shall not vary more than 1/8 inch between adjoining curbs. The plane of the top curb shall follow the line and grade indicated on the Drawings.
- C. The gap between abutting curb sections shall be butted as tight as possible, but in no case shall the gap exceed 1/4 inch. Caulk gap, color to match curb.
- D. Slope curb profile with transition pieces at handicap curb cuts and ends of curb runs that do not abut other improvements.
- E. Smoothly blend curbing to walks, and other curbs and drainage structures.

END OF SECTION 32 16 13.26

## SECTION 32 16 19 – ASPHALT CURBS

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### 1.2 SUMMARY

- A. This Section includes the following: asphalt curbs.
- B. Related Sections include the following:
  - 1. Division 01 Section “Alternates”.
  - 2. Division 32 Section “Asphalt Paving”.
  - 3. Division 32 Section “Concrete Paving”.
  - 4. Division 32 Section “Precast Concrete Curb”.

#### 1.3 SUBMITTALS

- A. Submit material certificates signed by the material producer and the Contractor certifying that the asphalt concrete mixture complies with the specified requirements.
- B. Submit profiles of templates detailed for approval prior to execution of work.

#### 1.4 DEFINITIONS

- A. Form 816: “Standard Specifications for Roads, Bridges and Incidental Construction”, State of Connecticut, Department of Transportation, Form 816, 2004 edition, with 2005 supplement.

### PART 2 - PRODUCTS

2.1 ASPHALTIC CONCRETE: Form 816 Article M.04.01 Class ‘3’.

2.2 TACK COAT: CT: ASTM D 977, emulsified asphalt or ASTM D 2397, cationic emulsified asphalt, slow setting, factory-diluted in water, of suitable grade and consistency for application.

### PART 3 - EXECUTION

3.1 GENERAL: Conform to Form 816, Section 8.15 including the application of a tack coat prior to the curb installation.

3.2 INSTALLATION

- A. Construct curb by machine extrusion to the sections shown on the detail. Carefully maintain line and grade. Areas of deviation are to be removed and replaced without extra compensation.
- B. Taper curb on a 30-degree angle wherever curbing ends.
- C. Smoothly blend curbing to walks, curbs, and drainage structures.

3.3 PROTECTION

- A. Protect all curb from damage or displacement until Final Acceptance.
- B. Any curb deemed unacceptable by the Architect, must be completely removed and replaced by the Contractor, at no additional cost to the Owner.
- C. The Architect shall be the sole judge of the extent of unacceptable curb to be removed and replaced.

END OF SECTION 32 13 33

## SECTION 32 31 03 – METAL GUIDE RAIL

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### 1.2 SUMMARY

- A. This Section includes the following:
1. Galvanized Steel Posts.
  2. Type R-B 350 Metal Beam Guiderail
  3. Block Outs
  4. Concrete Footings at Terminals.
- B. Related Sections include the following:
1. Division 31 Section “Earth Moving”.
  2. Division 32 Section “Topsoil”.
  3. Division 32 Section “Lawns”.
  4. Division 32 Section “Concrete Paving”.

#### 1.3 DEFINITIONS

- A. Form 816: “Standard Specifications for Roads, Bridges and Incidental Construction”, State of Connecticut, Department of Transportation, Form 816, 2004 edition, with 2005 supplement.

Shop Drawings: Contractor shall provide fully dimensioned shop drawings and manufacturer’s technical literature for all improvements and confirm fabrication, reinforcing, and anchoring systems for approval.

#### 1.4 QUALITY ASSURANCE

- A. Allowable Tolerances: Guiderail shall not deviate more than ½” from grade in each section.

### PART 2 - PRODUCTS

#### 2.1 METAL BEAM GUIDE RAIL: Form 816, Article M9.10

- A. Posts and Spacer Blocks: Galvanized Steel I Beam with block outs per CTDOT.

- B. Rail Type: RB, Galvanized Metal Beam W Rail
- C. Provide terminal at exposed end of rail per CTDOT. Match existing new guiderail on site.
- D. Metal guiderail shall match existing new galvanized steel rail along walkway down to school, above the athletic fields.

## 2.2 ACCESSORIES

- A. Provide miscellaneous steel hardware, concrete and accessories as required. All hardware shall be hot dipped galvanized, for exterior, high humidity, unless otherwise approved and conform to applicable provisions of Form 816, Section M.10.02.9.

## 2.3 CONCRETE

- A. Provide concrete consisting of Portland cement per ASTM C 150, aggregates per ASTM C 33, and potable water. Mix materials to obtain concrete with a minimum 28 day compressive strength of 3500 psi. Us at least four sacks of cement per cu. Yd., 1-inch maximum size aggregate, 3 inch maximum slump.
- B. Provide standard cylindrical cardboard tube liners for full depth of footing, where required by Architect if excavations are not held vertical and smooth.

## PART 3 - EXECUTION

### 3.1 JOB CONDITIONS

- A. Confirm pavements, lawns and other improvements are completed prior to installation of specified improvements.
- B. Smoothly finish grade around all posts. Compact backfill and topsoil to prevent differential settlement. Do not allow water to stand adjacent to post bases.

### 3.2 GUIDE RAIL

- A. Install as per [Form 816, Section 9.10] and as detailed. Maintain constant and consistent horizontal and vertical alignment.
  - 1. Trim all bolts that project more than 1/4" beyond face of secured nut/washer assembly.
- B. Protect until acceptance of project. Replace or refinish the surfaces if damaged, prior to acceptance. Clean up all debris from installation.
- C. Install concrete footings at terminal posts and min 20' O.C.

END SECTION 32 31 03

## SECTION 32 31 13 – CHAIN LINK FENCES AND GATES

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### 1.2 SUMMARY

- A. This Section includes the following:
  - 1. System “A” – Standard chain link fencing system, including aluminum coated steel chain link fabric.
- B. Related Sections include the following:
  - 1. Division 31 Section “Earth Moving”.
  - 2. Division 32 Section “Topsoil”.
  - 3. Division 32 Section “Concrete Paving”.

#### 1.3 SUBMITTALS

- A. General: Submit the following according to the Conditions of the Contract and Division 1 Specification Sections.
- B. Product data in the form of manufacturer’s technical data, specifications, and installation instructions for each type of fence system, including gate posts, fabric, gates, and accessories, including mill certificates.
- C. Shop drawings showing location of fence, gates, each post, and details of post installation, extension arms, gate swing, hardware, and accessories.

#### 1.4 QUALITY ASSURANCE

- A. Installer Qualifications: Engage an experienced Installer who has completed fence systems similar in material, design, and extent to that indicated for this Project and with a record of successful in-service performance.
- B. Single Source Responsibility: Obtain each type of chain link fences and gates, including accessories, fittings, and fastenings, from a single source.

1.5 PROJECT CONDITIONS

- A. Field Measurements: Verify layout information for fences and gates shown on the Drawings in relation to the property survey and existing structures. Verify dimensions by field measurements.

PART 2 - PRODUCTS

2.1 FABRIC

- A. Selvage: Knuckled on both selvages for all fabrics.
- B. Steel Chain Link Fence Fabric: Fabricated in one piece widths for fencing 12 feet and less in height to comply with Chain Link Fence Manufacturers Institute (CLMI) "Product Manual" and with requirements indicated below.
  - 1. System "A":
    - a. Mesh and Core Wire Size: 2 inch mesh, 0.192 inch diameter gage – backstops, dugouts, and shot put cage typical).
    - b. Mesh and Core Wire Size: 2 inch mesh, 0.148 inch diameter gage – typical).
    - c. Coating: ASTM A 817, Type 1, aluminized.
    - d. Locking fence inserts in areas as noted on the plans. Color to be as approved by the Architect.

2.2 FRAMING

- A. Round member sizes are given in actual outside diameter (OD) to the nearest thousandth of inches. Round fence posts and rails are often referred to in ASTM standard specifications by nominal pipe sizes (NPS) or the equivalent trade sizes in inches. The following indicates these equivalents all measured in inches:

| <u>Actual OD</u> | <u>NPS Sizes</u> | <u>Trade Size</u> |
|------------------|------------------|-------------------|
| 1.315            | 1                | 1-3/8             |
| 1.660            | 1-1/4            | 1-5/8             |
| 1.900            | 1-1/2            | 2                 |
| 2.375            | 2                | 2-1/2             |
| 2.875            | 2-1/2            | 3                 |
| 4.000            | 3-1/2            | 4                 |
| 6.625            | 6                | 6-5/8             |
| 8.625            | 8                | 8-5/8             |



- B. All posts shall be of sufficient length to allow specified setting into concrete footings.
- C. Type II Round Posts: cold-formed, electric-welded steel pipe conforming to heavy industrial requirements of ASTM F 1043, Group IC, with minimum yield strength of 50,000 psi, either protective coating system below according to ASTM F 1043, and weights per foot as follows:
  - 1. Coatings: system A: Outside with a minimum of 0.9 oz. of zinc per sq. ft. after welding, a chromate conversion coating and a clear crosslinked polymer overcoat. Interior of pipe to contain a minimum of 0.9 oz of zinc per sq. ft. or a minimum 0.3 mil thick, 87 percent zinc pigmented nominal coating, capable of providing galvanic protection.

| <u>Actual OD</u> | <u>Weight (lb/ft)</u> | <u>NPS Size</u> |
|------------------|-----------------------|-----------------|
| 1.315            | 1.35                  | 1               |
| 1.660            | 1.84                  | 1-1/4           |
| 1.900            | 2.28                  | 1-1/2           |
| 2.375            | 3.12                  | 2               |
| 2.875            | 4.64                  | 2-1/2           |
| 4.000            | 6.56                  | 3-1/2           |

- D. Top Rail: Manufacturer’s longest lengths (17 to 21 feet) with swedged-end or expansion-type coupling, approximately 6 inches long for joining. Provide rail ends or other means for attaching top rail securely to each gate corner, pull, and end post. Minimum length of any top rail section – 10’ – 0”.

  - 1. Round Steel: 1.660 inch OD Type II steel pipe.

- E. Steel posts for fabric heights up to 6 feet:
  - 1. Round Line or Intermediate Posts: 2.375 inch OD Type II steel pipe.
  - 2. Round End, Corner, and Pull Posts: 3.00 inch OD Type II steel pipe.
- F. Steel posts for fabric heights over 6 feet:
  - 1. Round Line or Intermediate Posts: 2.875 Type II steel pipe.
  - 2. Round End, Corner, and Pull Posts: 4.00 inch OD Type II steel pipe.
- G. Swing Gate Posts: Furnish posts to support single gate leaf, or one leaf of a double-gate installation, according to ASTM F 900, sized as follows for steel and aluminum pipe posts:
  - 1. Steel posts for fabric height over 6 feet and gate leaf width:
    - a. Up to and including 6 Feet wide: 4.0 inch OD pipe weighting at least 4.64 lb per ft.
    - b. Over 6 to 12 Feet: 4.000 inch OD pipe weighing at least 8.65 lb per ft.
    - c. Over 12 to 24 Feet: 6.625 inch OD pipe weighing at least 10.02 lb per ft.

- d. Over 18 to 24 Feet: 8.625 OD pipe weighing at least 27.12 lb per ft.

## 2.3 FITTINGS AND ACCESSORIES

- A. Material: System A to comply with ASTM F 626. Mill finished aluminum or galvanized iron or steel to suit manufacturer's standards.
1. Preformed Units: Sizes to fit applications indicated, selected from manufacturer's standard thicknesses, widths, and lengths.
  2. Aluminum: Die cast conforming to ASTM B 26, aluminum alloy 360 or sand cast conforming to ASTM B 85, aluminum alloy 365, ZG61A, or Tenzalloy.
- B. Post and Line Caps: Provide weathertight closure cap for each post. Provide line post caps with loop to receive tension wire or top rail. Base of Post Cap to override post a minimum of 2".
- C. Post Brace Assembly: Manufacturer's standard adjustable brace. Use material specified below for brace, and truss to line posts with 3/8-inch diameter rod and prefabricated adjustable tightener. Field bent applications are not accepted. Provide manufacturer's standard galvanized-steel, cast iron or cast aluminum cap for each end.
1. Round Steel: 1-5/8 inch OD Type I or II steel pipe.
- D. Bottom, Auxiliary and Center Rail: Same material as top rail. Provide manufacturer's standard galvanized steel, cast iron or cast aluminum cap for each end. Bottom rails required on all fence systems 8' – 0" or more in height. Bottom and center rails required on all fences 10' – 0" or more in height.
- E. Tension or Stretcher Bars: Hot-dip galvanized steel with a minimum length 2 inches less than the full height of fabric, a minimum cross section of 3/16 inch by 3/4 inch, and a minimum of 1.2 oz. of zinc coating per sq. ft. Provide one bar for each gate and end post, and two for each corner and pull post, except where fabric is integrally woven into the post.
- F. Tension and Brace Bands: 3/4 inch wide minimum hot dip galvanized steel with a minimum of 1.2 oz. Of zinc coating per sq. ft.
1. Tension Bands: 0.074 inch thick (14 gage) minimum.
  2. Brace Bands: 0.105 inch thick (12 gage) minimum.
- G. Tension Wire: 0.177 inch diameter metallic coated steel marcelled tension wire conforming to ASTM A 824 with finish to match fabric. Bottom tension wire is required on all fences less than 8 feet in height.
- H. Tie Wires: 0.106 inch diameter (12 gage) galvanized steel with a minimum of 0.80 oz. per sq. ft. of zinc coating according to ASTM A641, Class 3 or 0.148 inch diameter (9 gage) aluminum wire alloy 1350-H19 or equal, to match fabric wire. Finish to match fabric.
- I. Drive Anchors: As manufactured by Anchor Fencing or approved equal.

## 2.4 CONCRETE/FOOTINGS

- A. Concrete: Provide concrete consisting of portland cement per ASTM C 150, aggregates per ASTM C 33, and potable water. Mix materials to obtain concrete with a minimum 28 day compressive strength of 3500 psi. Use at least four sacks of cement per cu. yd., 1-inch maximum size aggregate, 3 inch maximum slump.
- B. Provide standard cylindrical cardboard tube liners for full depth of footing, where required by Architect if excavations are not held vertical and smooth.

## 2.5 GATES

- A. Fabricate perimeter frames of gates from same material and finish as fence framework. Assemble gate frames by mitering corners and welding, prior to galvanizing or finishing. Provide horizontal and vertical members to ensure proper gate operation and attachment of fabric, hardware, and accessories. Space frame members maximum of 8 feet apart unless otherwise indicated.
  1. Fabric: Same as for fence unless otherwise indicated. Secure fabric at vertical edges with tension bars and bands and to top and bottom of frame with tie wires.
  2. Bracing: Install diagonal cross-bracing consisting of 1.660 o.d. pipe on all gates to ensure frame rigidity without sag or twist.
- B. Swing Gates: Comply with ASTM F 900.
  1. Steel: Gates up to 8 feet wide:
    - a. Fabricate perimeter frames of 1.90 inch minimum OD Type II steel pipe, with mitred and welded corners. Fabricate prior to galvanizing.  
  
[Note: Gates over 8 feet wide require custom design and specification.]
  2. Gate Hardware: Provide galvanized hardware and accessories for each gate according to the following:
    - a. Hinges: Heavy Industrial duty box style, properly sized to suit gate size, non lift off type, offset to permit 180 degree gate opening. Provide a minimum of 2 hinges for each leaf; gates over 6 foot nominal height, provide sufficient hinges to support weight of gate, without sag.
    - b. Latches for gates shall be a paddle device, specifically manufactured for operation by individuals with motion restrictions in their upper body limbs. The force to activate the latch shall be no greater than 5 pounds. On two leaf gates, one leaf shall be fixed with a drop rod, while the other leaf shall have the paddle device, mounted on both sides of the leaf. The assembly shall contain a mechanism for locking the gates. The latch shall be similar to Adams Rite Dead Latch, #4710 and Paddle Assembly, #4590, as manufactured by Master Halco Company and distributed by Atlas Fence Company, Canton, Connecticut, or approved equal.
    - c. Keeper: Provide a keeper for vehicle gates that automatically engages gate leaf and holds it in the open position until manually released.

- d. Gate Stops: Provide gate stops for double gates consisting of mushroom type flush plate with anchors, set in concrete, and designed to engage a center drop rod or plunger bar. Include a locking device and padlock eyes as an integral part of the latch, permitting both gate leaves to be locked with a single padlock.
  - e. Ferrule for plunger bar type gate keeper. Provide 3" depth stainless steel ferrules of the correct diameter in both the open and closed positions for all plunger bar type gate keepers. Core and epoxy ferrule (3" depth) in place if finished surface is concrete or provide a concrete footing and support (min. 12"x12"x12") for ferrule if finished surface is either asphalt or earth. Top of ferrules shall be flush with finished surface.
  - f. Fabricate stops on all track gate hinges to prohibit gates opening in the running track area.
- 2.6 GROUT: exterior Portland-cement based non-shrinking grout with 8,000 psi compression strength at 7 days, similar to Super Por-rok, by Minwax Company and distributed by Lambert Corporation, or approved equal.

### PART 3 - EXECUTION

#### 3.1 INSTALLATION

- A. General: Install fence to comply with the project details and ASTM F 567. Do not begin installation and erection before final grading is completed, unless otherwise permitted.
  - 1. Apply fabric to outside of framework. Install fencing on boundary lines inside of property line established by survey as required by Division 1.
- B. Excavation: Drill or hand excavate (using post hole digger) holes for posts to diameters and spacing indicated, in firm, undisturbed or compacted soil. Excavation to be vertical – tapered excavations are not permitted. Install posts and foundations for fences in paved areas, prior to the installation of pavement material. Augering holes in pavement for fence post installation will NOT be permitted.
  - 1. Excavate holes for each post to minimum diameter recommended by fence manufacturer, but not less than four times the largest cross section of post.
  - 2. Unless otherwise indicated, excavate hole depths approximately 3 inches lower than post bottom, with bottom of posts set not less than 48 inches below finish grade surface.
  - 3. Provide full-length tube form liners if directed by Architect, due to inconsistent faces of excavation.
- C. Setting Posts: Center and align posts in holes as detailed. Space a maximum of 10 feet o.c., unless otherwise indicated.
  - 1. Protect portion of posts above ground from concrete splatter. Moisten soil prior to placing concrete. Place concrete around posts in a continuous pour, and vibrate or tamp for consolidation. Check each post for vertical and top alignment, and hold in position during placement and finishing operations.

- a. Unless otherwise indicated, hold concrete footings 2 inches below grade and trowel to a crown to shed water.
2. Provide terminal/corner posts wherever fence changes direction more than 10 degrees, at abrupt changes in grade, and at 300' maximum intervals.
3. If ledge rock is encountered, the posts shall be set in holes drilled into rock at least 18" in depth and grouted with an approved non shrink and non metallic grout to hold post firmly in correct position.
  - a. Hole size – 1" larger than O.D. of post pipe.
  - b. Grout consistency shall be flowable and soupy to completely fill voids between post and ledge.
4. Setting posts: Remove loose and foreign materials from sides and bottoms of holes, and moisten soil prior to placing concrete.
  - a. Keep: exposed concrete surfaces moist for at least three (3) days after placement, or cure with membrane curing materials or other acceptable curing method.
  - b. Concrete Strength: Allow concrete to attain at least 75% of its minimum 28 day compressive strength, but in no case sooner than 7 days after placement, before rails, tension wire, or fabric and wires are installed.
- D. Top Rails: Run rail continuously through line post caps, bending to radius for curved runs and at other posts terminating into rail end attached to posts or post caps fabricated to receive rail. Provide expansion couplings as recommended by fencing manufacturer.
- E. Center Rails: Install center rails in one piece between posts and flush with post on fabric side, using rail ends and special offset fittings where necessary. Install center rail at both sides of all corner and brace posts. Install continuous center rail on all fences over 8' feet in height.
- F. Bottom Rails: Similar to top rails. On fences 8 feet high, install one bottom rail, 3 inches above bottom of fabric. On fences higher than 8 feet high, install a second bottom rail, 21 inches above the lower one.
- G. Bracing Assemblies: Install braces at end and gate posts and at both sides of corner and pull posts, and every 150' OC on continuous line posts. Locate horizontal braces at midheight of fabric on fences with top rail and at two-thirds fabric height on fences without top rail. Install all posts are plumb when diagonal rod is under proper tension.
- H. Bottom Tension Wire: Install tension wire within 6 inches of bottom of fabric before stretching fabric and tie to each post with not less than same gage and type of wire. Pull wire taut, without sags. Fasten fabric to tension wire with 0.120 inch diameter (11-gage) hog rings of same material and finish as fabric wire, spaced a maximum of 12 inches on center. Tension wire must pass by vertical posts, on the same side as the fabric.
- I. Top Tension Wire: Install tension wire within 6 inches of top of fabric before stretching fabric and tie to each post with not less than same gage and type of wire. Pull wire taut, without sags. Fasten fabric to tension wire with 0.120 inch diameter (11-gage) hog rings of same material and finish as fabric wire, spaced a maximum of 24 inches on center. Tension wire must pass by vertical posts, on the same side as the fabric.

- J. Fabric: Leave 1-1/2 inches between finish grade and bottom selvage at all installations, including tennis courts. Pull fabric taut and tie to posts, rails, and tension wires. Install fabric on playing or security side of fence, and anchor to framework so that fabric remains under tension after pulling force is released.
- K. Tension or Stretcher Bars: Thread through fabric and secure to end, corner, pull, and gate posts with tension bands spaced not over 15 inches o.c.
- L. Tie Wires: Use wire of proper length to secure fabric firmly to posts and rails. Bend ends of wire to minimize hazard to persons or clothing.
  - 1. Maximum Spacing: Tie fabric to line posts 12 inches o.c. and to top rails and braces 18 inches o.c.
- M. Fasteners: Install nuts for tension bands and carriage bolts on the side of the fence opposite the fabric side. Peen ends of bolts or score threads to prevent removal of nuts for added security.

### 3.2 GATE INSTALLATION

- A. Install gates plumb, level, and secure for full opening without interference. Install ground set items in concrete for anchorage. Adjust hardware for smooth operation and lubricate where necessary. Install gates according to manufacturer's instructions, plumb, level, and secure.

END OF SECTION 32 31 13

## SECTION 32 91 01 – TOPSOIL

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### 1.2 SUMMARY

- A. This Section includes the following:
1. Testing, amending, screening, placing and finish grading all stockpiled and borrow topsoil.
  2. Provide all borrow topsoil necessary to properly complete all lawn and planting operations.
- B. Related Sections include the following:
1. Division 31 Section “Site Clearing”.
  2. Division 31 Section “Earth Moving”.
  3. Division 32 Section “Turf and Grasses”.

#### 1.3 QUALITY ASSURANCE

- A. All work shall comply with all codes, rules, regulations, laws and ordinances for the City of Danbury, State of Connecticut, and all other authorities having jurisdiction.
- B. Topsoil:
1. Testing: Representative samples of all stockpiled and borrow topsoil shall be completely analyzed/tested to determine:
    - a. Nutrient analysis using the Modified Morgan extractant for soil available P, K, Ca, and Mg.
    - b. Soil pH.
    - c. Organic content-determined by loss of weight on ignition.
    - d. Particle size analysis-sand, silt, and clay-analysis shall be determined using the hydrometer method of particle size analysis with size fractions based upon sized limits established by USDA.
    - e. Laboratory recommendations required for topsoil to achieve optimum nutrient levels for the establishment of lawn, trees and shrubs or special plantings (i.e. wetlands replication).
  2. Testing shall conform to “Recommended Soil Testing Procedures for the Northeastern United States”, Bulletin #493

3. Before delivery of any borrow topsoil, furnish the Architect with a 5 gallon sample of material.
4. Topsoil testing costs shall be borne by the Contractor.
5. Testing laboratory shall be:  
Soil Nutrient Analysis Laboratory  
Department of Plant Science  
University of Connecticut  
2019 Hillside Road, U-102  
Storrs, Ct 06269-1102
6. Contractor may submit a written request to utilize an alternate testing laboratory, to the Owner and Architect for approval. This request must include the qualifications of the proposed alternate laboratory. This laboratory may not be retained by the Contractor until written permission is received from the owner and Architect.

- C. Submit list of machinery to be used during subgrade preparation and topsoil operations. NO rubber tired machinery will be permitted except for light-weight, farm-tractor grade machinery with wide tires designed for turf use. All heavy machinery must be track-drive.

#### 1.4 SUBMITTALS

- A. Submit topsoil test results to the Architect for review. The Architect will be the sole judge of acceptability.
- B. 5-lb sample to the Architect for visual conformance confirmation.

#### 1.5 PRODUCT HANDLING

- A. Coordinate delivery of borrow topsoil such that it is placed as delivered and no stockpiling is required.

### PART 2 - PRODUCTS

#### 2.1 BORROW TOPSOIL

- A. Shall be a sandy loam, or fine loamy sand (per USDA Soil Classification index), with a minimum 70% sand content by weight not to contain materials harmful to plant life, to be clean, fertile, friable, and well draining. All topsoil to be free of any subsoil earth clods, sod, stones over 3/4" in any dimension, (topsoil for athletic field construction shall be free of stones over 1/2" diameter), sticks, roots, weeds, litter and other deleterious material. Topsoil shall be uniform in quality and texture and contain organic matter and mineral elements necessary for sustaining healthy plant growth.
- B. Topsoil shall have the following optimum ranges unless otherwise approved by the Architect.
  1. Organic Matter Content: 3 – 7%
  2. Acidity range: pH 5.5 to pH 7.4



- C. Nutrient levels shall be achieved by the Contractor's addition of amendments to the topsoil to meet the optimum nutrient levels specified in the testing laboratory report.
- D. Contractor shall provide approved borrow topsoil as required to complete this project.

## 2.2 STOCKPILED TOPSOIL

- A. Stockpiled topsoil shall conform to all requirements of paragraph 2.1. Topsoil material must be 3/4" screened. The contractor is only required to screen and stockpile the quantity of topsoil as required for this project. Excess screened and unscreened topsoil material shall remain the property of the Contractor and shall be removed from the site. Supplement existing topsoil as required as noted in the Borrow Topsoil section.
- B. Provide amendments to stockpiled topsoil (organic material, sand, etc.) to produce topsoil in conformance with project requirements.
- C. Waste products from screening operations are the property of the Contractor and shall be removed from the site at the Contractor's expense.

## PART 3 - EXECUTION

### 3.1 SHAPING AT ALL NEW LAWN AREAS

- A. After rough grading has been completed, shape and grade lawn subgrade areas to lines and levels as noted on the drawings and as required based on total amounts of approved topsoil to allow placement of uniform depth of topsoil. Adjustments may be necessary due to field conditions. Provide all shaping adjustments at no additional cost to the Owner.
- B. Cultivate and loosen the subgrade soil to 18" depth with a subsoiler or other approved machinery to correct over-compaction.
- C. After shaping of lawn subgrades remove all sticks, stones, or foreign material two (2) inches or greater in dimension. Remove debris and stone off-site.

### 3.2 TOPSOIL SPREADING

- A. Do not apply topsoil to the prepared subgrade without approval by the Architect. Once approved, no vehicular traffic will be allowed on finish subgrade. Topsoil will not be permitted to be spread until topsoil test reports have been submitted and approved. Topsoil shall not be delivered or worked in a frozen or muddy condition.
- B. Uniformly distribute and spread topsoil over all graded lawn areas to conform smoothly to the lines, grades, and elevations shown or otherwise required. If directed conduct field density tests to demonstrate friable subgrade conditions. All general lawn areas to have a minimum of 6" of topsoil after compaction. All athletic fields shall have a minimum of 8 inches of topsoil, after compaction. All approved stockpiled topsoil is to be spread unless otherwise directed by the Owner. Maintain consistent depths of material throughout the project area. Install topsoil in athletic fields by dumping topsoil at the sideline/edges, and pushing towards the center of each

field, utilizing equipment no larger than a small farm tractor. Keep all heavy equipment and trucks off the topsoil. Take care not to disturb approved subgrade.

1. Manually supply topsoil around all trees to remain. Avoid damage to root systems.
- C. Topsoil shall be spread in (2) equal lifts. Bottom lift shall be thoroughly mixed with the loosened subgrade by disking, harrowing, or other approved means, to a depth of 4 inches into the subgrade, to create a transition layer.
- D. Place topsoil only when it can be immediately followed by lawn development operations.
- E. Supply and replace topsoil to eroded, settled or damaged areas until all lawn areas are stabilized. Care shall be taken not to damage grass or pavement areas in the replacement to topsoil.

### 3.3 PROTECTION

- A. Remove weeds prior to lawn development operations. No weeds shall be allowed to go to seed.
- B. Keep heavy equipment, trucks, etc. off areas that have received topsoil, at all times.
- C. If compaction occurs, scarify to the full depth of the topsoil and regrade topsoil.

### 3.4 EXCESS TOPSOIL

- A. Material not approved for reuse remains the property of the Contractor and is to be removed from the site.

END OF SECTION 32 91 01

## SECTION 32 92 00 – TURF AND GRASSES

### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### 1.2 SUMMARY

- A. The work of this Section includes the following:
  - 1. Fine grading and preparing lawn areas.
  - 2. Furnishing and applying soil amendments.
  - 3. Furnishing and applying fertilizers.
  - 4. Furnishing and applying slope seed mixtures.
  - 5. Furnishing and applying wildflower seed mixtures.
  - 6. Replanting unsatisfactory or damaged lawns.
  - 7. Maintenance of all lawns until acceptance.
- B. Related Sections include the following:
  - 1. Division 31 Section “Site Clearing”.
  - 2. Division 31 Section “Earth Moving”.
  - 3. Division 32 Section “Topsoil”.
  - 4. Division 32 Section “Plants”.

#### 1.3 DEFINITIONS

- A. Form 816: “Standard Specifications for Roads, Bridges and Incidental Construction”, State of Connecticut, Department of Transportation, Form 816, 2004 edition, with 2005 supplement.

#### 1.4 SUBMITTALS

- A. General: Submit each item in this Article according to the Conditions of the Contract and Division 01 Specification Sections.
- B. Product data for the following:
  - 1. Fertilizers.
  - 2. Limestone.
  - 3. Chemical preservatives and controls – also confirm that each of the materials proposed to be applied are permitted for use by the State of Connecticut.
- C. Certification of grass seed from seed vendor for each grass-seed mixture and sod grown stating the botanical and common name and percentage by weight of each species and variety, and

percentage of purity, germination, and weed seed. Include the year of production and date of packaging. Submit topsoil test of sod source to determine compatibility of sod material with project topsoil (borrow & stockpiled).

- D. Qualification data for firms and persons specified in the "Quality Assurance" Article to demonstrate their capabilities and experience. Include lists of completed projects with project names and addresses, names and address of Architects and Owner, and other information specified.
- E. Material test reports from qualified independent testing agency indicating and interpreting test results relative to compliance of the following materials with requirements indicated.
  - 1. Analysis of existing surface soil.
  - 2. Analysis of imported topsoil.
- F. Planting schedule indicating anticipated dates and locations for each type of seeding or sodding.
- G. Maintenance instructions recommending procedures to be established by Owner for maintenance of lawns during an entire year. Submit before expiration of required maintenance periods.
- H. The Contractor must include, in the Schedule of Values, a separate line item for "Maintenance of Lawns". This item will include all costs assigned by the Contractor, for the expenditure of labor and materials anticipated from the time of lawn establishment, until acceptance.

#### 1.5 QUALITY ASSURANCE

- A. Installer Qualifications: Engage an experienced Installer who has completed lawn development work similar in material, design, and extent to that indicated for this Project and with a record of successful grass establishment.
  - 1. Installer's Field Supervision: Require Installer to maintain an experienced full-time supervisor on the Project site during times that grass planting is in progress.
- B. Examine work to receive lawn development and notify the Architect of any defects. Specifically review the topsoil placement (depths, grades, and condition). Commencement of this work implies acceptance by Contractor of preparatory work by others.
- C. Pre-installation Conference: Conduct conference at Project site to comply with requirements of Division 1 Section "Project Meetings".

#### 1.6 DELIVERY, STORAGE, AND HANDLING

- A. Seed, Fertilizer and Lime: Deliver in original sealed, labeled, and undamaged containers, showing weight, analysis, and name of manufacturer.
- B. Protect materials from deterioration during delivery and while stored at site.

1.7 GUARANTEE

- A. Duration of guarantee shall be until the completion of the specified maintenance period and until Owner's final acceptance of all lawn areas.

1.8 CHEMICAL CONFORMANCE

- A. All chemical applications shall conform to the State of Connecticut statutes and Borough's Integrated Pest Management (IPM) plans.
- B. Contractor shall provide all necessary data and information to the Owner for amending or filing an IPM plan, including, but not limited to proposed chemicals and EPA number, applicator name and license number, and proposed application dates.
- C. All fertilizer, pesticide and herbicide applications must conform to the IPM, or in the absence thereof, must conform to the regulations of the State of Connecticut, in addition to any and all conditions listed in Division 1, Section "Project Environmental Permits" of this Specification.

PART 2 - PRODUCTS

2.1 SEED

- A. Grass Seed: Fresh, clean, dry, new-crop seed complying with the Association of Official Seed Analysts' "Rules for Testing Seeds" for purity and germination tolerances.
  - 1. Seed Mixture: Provide seed of grass species and varieties, proportions by weight, and minimum percentages of purity, germination, and maximum percentage of weed seed as indicated on Schedules at the end of this Section.

2.2 LIME

- A. ASTM C 602, class T, agricultural ground limestone containing a minimum 50 percent total oxides (calcium oxide plus magnesium oxide), with a minimum 50 percent passing a 100 mesh sieve, and 98% passing a 20-mesh sieve, for powder form of lime.
  - 1. Provide lime in the form of dolomitic limestone.

2.3 FERTILIZER

- A. Phosphorus: Commercial, soluble; guaranteed analysis of 0-46-0.
- B. Starter Fertilizer: Commercial-grade complete fertilizer of neutral character, consisting of fast release water soluble nitrogen, derived from natural organic sources of urea ammonium phosphate, or similar material.
  - 1. Composition: Nitrogen, phosphorous, and potassium in amounts recommended in soil reports from a qualified soil-testing agency, 14.28.14 guaranteed analysis.

- C. Secondary-Fertilizer: Granular fertilizer consisting of 50 percent water-insoluble nitrogen, phosphorus, and potassium with guaranteed analysis of 15.15.15.
- D. Tertiary Fertilizer: guaranteed analysis of 46-0-0.

#### 2.4 MULCHES

- A. Straw Mulch: Provide air-dry, clean, mildew-and seed-free, salt hay or threshed straw of wheat, rye, oats, or barley.
- B. Peat Mulch: Provide peat moss in natural, shredded, or granulated form, of fine texture, with a pH range of 4 to 6 and a water-absorbing capacity of 1100 to 2000 percent.
- C. Fiber Mulch: Biodegradable dyed-wood cellulose-fiber mulch, nontoxic, free of plant growth or germination inhibitors, with maximum moisture content of 15 percent and a pH range of 4.5 to 6.5.
- D. Nonasphaltic Tackifier: Colloidal tackifier recommended by fiber-mulch manufacturer for slurry application, nontoxic and free of plant growth or germination inhibitors.

#### 2.5 EROSION CONTROL MATERIALS

- A. Material shall be a lightweight, nonwoven erosion control/revegetation blanket comprised primarily of virgin wood fiber. The blanket shall be manufactured by blending thermal mechanically – defibrated wood fiber with a small percentage of recycled synthetic fibers and forming them into a drapeable blanket. An accelerated photodegradable polypropylene netting shall be laminated to the surfaces of the blanket.
- B. Material shall be similar to “Futerra”, as manufactured by Conwed Fibers of Statesville, North Carolina, or approved equal.

#### 2.6 SALT MARSH HAY

- A. Naturally harvested salt marsh hay, certified weed free.

#### 2.7 CHEMICAL PREVENTATIVE AND CONTROLS

- A. Commercial materials labeled for turf maintenance, State of Connecticut and EPA registered and approved for turf application.

#### 2.8 WATER

- A. Potable: The Contractor is responsible for furnishing all water necessary to complete the establishment and maintenance of lawns until acceptance by Owner. This requirement includes providing all water for irrigated lawn areas, if any, until the irrigation system is activated.

### PART 3 - EXECUTION

#### 3.1 EXAMINATION

- A. Examine areas to receive lawns and grass for compliance with requirements and for conditions affecting performance of work of this Section. Do not proceed with installation until unsatisfactory conditions have been corrected.

#### 3.2 COORDINATION AND SCHEDULING

- A. Planting Season: Sow lawn seed and install sod during normal planting seasons for type of lawn work required. Correlate planting with specified maintenance periods to provide required maintenance from date of Substantial Completion.
- B. Weather Limitations: Proceed with planting only when existing and forecast weather conditions are suitable for work.
- C. Construct lawns between April 1 and June 1, and between August 15 and October 1, unless otherwise approved.
- D. Examine areas to receive seeding or sod and notify Architect of any problems prior to commencing work. Specifically review the topsoil placement (depths, grades and conditions). Commencement of this work implies acceptance by Contractor of preparatory work of others.

#### 3.3 PREPARATION

- A. Protect structures, utilities, sidewalks, pavement, and other facilities, trees, shrubs, and plantings from damage caused by lawn development operations.
  - 1. Protect adjacent and adjoining areas from hydroseed overspraying.
- B. Provide erosion control measures to prevent erosion or displacement of soils and discharge of soil bearing water runoff or airborne dust to adjacent properties and walkways.

#### 3.4 TOPSOIL PREPARATION - GENERAL

- A. Apply lime, and phosphorus at the rates recommended by the topsoil tests in all areas where topsoil has been installed. Cultivate topsoil to its full depth by scarifying or other disking methods to thoroughly incorporate amendments into the topsoil. Maintain a loose friable seed bed. At no time will rubber tired loaders or graders having greater compaction than a small farm tractor be allowed on topsoil. Keep all heavy equipment and trucks off prepared topsoil. Do not prepare while ground is wet or frozen.
- B. Provide additional topsoil where and as required to properly meet all proposed finish grades.
- C. Remove any weeds, debris, foreign matter and stones having any dimension greater than 3/4 inch. Remove from property.

- D. Fine grade to a smooth uniform surface. The entire area shall present an even grade with no depressions where water will stand. Any protective fencing around existing trees shall be removed and disposed of by the Contractor at this time. Topsoil shall be smoothly blended to existing finish grades around erosion control devices and adjacent existing conditions, maintain existing surface drainage patterns. Round-off all top and toe of slopes. Reinstall erosion control devices and protective fencing as required.
- E. Approval of surface by Architect shall be obtained before seeding or sodding operations begin. Where directed, perform bulk density and nuclear compaction readings to monitor degree of soil compaction/seed bed friability.

### 3.5 LAWN DEVELOPMENT

- A. General: All disturbed areas not developed otherwise shall be developed as lawn as indicated on the Drawings and as specified.

### 3.6 SEEDING GENERAL LAWN AREAS

- A. Ensure that the soil has been prepared in accordance with Topsoil Paragraph of this Section. All disturbed areas not developed otherwise shall be developed as lawn.
- B. Seeding shall be done when wind does not interfere with uniform distribution of hydroseeding mixture.
- C. Sow seed at following rates:
  - 1. Seeding Rate: 5 lb per 1000 sq. ft.
- D. Hydroseeding of general lawn areas, only, is permitted. Mix specified seed, fertilizer, and maximum 10% of fiber mulch in water, using equipment specifically designed for hydroseed application. Continue mixing until uniformly blended into homogenous slurry suitable for hydraulic application.
  - 1. Mix slurry with non-asphaltic tackifier.
  - 2. Apply slurry uniformly to all areas to be seeded in a 2-step process. Apply first slurry application at the minimum rate required to obtain specified seed-sowing rate.
  - 3. Apply second slurry cover coat of fiber mulch at a rate of 1000 pounds per acre.

### 3.7 EROSION PREVENTATIVES

- A. Install erosion control material on all seeded slopes one foot (1') vertical to three (3) feet horizontal or steeper, or any seeded areas which receive concentrated run-off water, and areas as required by the Architect or Owner. Joints in these materials shall overlap no less than one foot (1') and the material shall be secured as recommended by the manufacturer.



### 3.8 WATERING LAWN AREAS

- A. Maintain a moist seed and sod bed at all times. Water seedbed daily with 1/4" water/day using three sets, keeping the surface moist. Apply complete coverage to insure proper germination/root growth conditions. Maintain soil moisture at or near field capacity during the period of germination and seeding development.
- B. Protect all lawn areas with barricades, if necessary, to keep all traffic off the area. Repair all damage to lawn areas including topsoil replacement, at no additional cost to Owner.
- C. Adjust watering requirement as required at request of Owner and after a full ground cover has been achieved.

### 3.9 MAINTENANCE

- A. Begin maintenance of lawns immediately after each area is planted and continue until lawn is accepted.
  - 1. When lawn has not been accepted at the end of growing season, or if lawn is not fully established at that time, continue maintenance during the next growing season.
- B. Maintain and establish all lawns by watering, fertilizing, weeding, mowing, trimming, replanting bare or eroded areas and remulch to produce a uniformly smooth lawn.
- C. Replant bare areas with same materials specified for lawns.
- D. Add new mulch in areas where mulch has been disturbed sufficiently to nullify its purpose. Anchor as required to prevent displacement.
- E. Crabgrass and broadleaf weed control.
  - 1. General: Treat all lawn areas with crabgrass or broadleaf weed control in conformance with manufacturer's recommendations as required (after diagnosis of weed/crabgrass presence).
  - 2. Time: Conform to the manufacturer's recommendations.
  - 3. Rate: Conform to the manufacturer's recommendations.
- F. Disease Control
  - 1. General: Treat any diseased lawn areas with disease control in conformance with the manufacturer's recommendations as required (after diagnosis of disease organisms).
  - 2. Time: Conform to the manufacturer's recommendations.
  - 3. Rate: Conform to the manufacturer's recommendations.
- G. Mow lawns as soon as there is enough top growth to cut with reel mower set at mowing height of 1-1/2 " (bench height). Repeat mowing as required to maintain specified height without cutting more than 30 percent of the grass height on maximum 5 day interval. Remove no more than 30 percent of grass-leaf growth in initial or subsequent mowings. Do not mow when grass is wet. Schedule mowing when grass attains a 2" height. Subsequent mowing to maintain following grass height. Subsequent mowings to maintain following grass height.

1. Mow grass from 1-1/2 to 2 inches high.
2. Maintain reel blade and bed knife in sharp condition and evenly matched to provide a clean cut.

H. Secondary Fertilization: Apply secondary fertilization to entire lawn areas two (2) weeks after seeding.

I. Tertiary Fertilizations: Apply three (3) tertiary fertilizations at two week intervals (4, 6, and 8 weeks after seeding) to entire lawn areas.

J. Additional Fertilizations: Continue fertilizations as required to establish a weed free dense stand of grass.

### 3.10 EXISTING LAWN RENOVATION

A. Renovate existing lawn damaged by Contractor's operations, such as storage of materials or equipment and movement of vehicles.

1. Reestablish lawn where settlement or washouts occur or where minor regrading is required.

B. Remove sod and vegetation from diseased or unsatisfactory lawn areas; do not bury in soil.

C. Remove topsoil containing foreign materials resulting from Contractor's operations, including oil drippings, fuel spills, stone, gravel, and other construction materials, and replace with new topsoil.

D. Mow, dethatch, core aerate, and rake existing lawn.

E. Remove weeds before seeding. Where weeds are extensive, apply selective herbicides as required, Do not use pre-emergence herbicides.

F. Remove waste and foreign materials, including weeds, soil cores, grass, vegetation, and turf, and legally dispose of them off Owner's property.

G. Till stripped, bare and compacted areas thoroughly to a soil depth of 6 inches.

H. Apply soil amendments and initial fertilizers required for establishing new lawns and mix thoroughly into top 4 inches of existing soil. Provide new planting soil to fill low spots and meet finish grades.

I. Apply seed and protect with straw mulch as required for new lawns.

J. Water newly planted areas and keep moist until new lawn is established.

### 3.11 ACCEPTABLE LAWNS

- A. The Architect shall inspect all work for acceptance of lawns **upon written request** of the Contractor. The request shall be received at least 10 days before the anticipated date of inspection.
  - 1. Lawn areas will not be accepted in “pieces”, unless specifically agreed to by the Owner.
  - 2. If the lawn is in acceptable condition, the Contractor’s maintenance responsibility will end. If, in the opinion of the Architect, the grass stand is unacceptable, the Contractor’s complete maintenance responsibilities shall continue until an acceptable stand of grass is achieved.
- B. All lawns will be considered eligible for inspection and acceptance provided all requirements, including maintenance, have been met and a healthy, uniform, dense stand of grass is established, free of weeds, bare spots and surface irregularities, with coverage exceeding 90 percent over any 5 square feet selected by the Architect. The Architect will be the sole judge of acceptability. Lawns must be free of weeds, crabgrass, and other undesirable plants, with no disease present. Sodded lawns shall be free of open joints and uneven surfaces. Acceptance will not be made until all damaged areas, including areas outside the property limits, have been restored to original conditions.
- C. Replant lawns that do not meet requirements and continue maintenance until lawns are satisfactory. Upon stabilization of lawn areas, remove erosion control devices and protective fencing. Reseed bare areas as required.

### 3.12 WINTERIZATION

- A. At the end of the growing season, prior to the on-set of Winter, all newly-seeded areas, open earthen areas, or stockpiled earth materials, must be protected from erosion. This protection must form a continuous blanket over these areas. Protection may be:
  - 1. a hydro-seed mulch with a non-asphaltic tackifier, or;
  - 2. straw mulch spread uniformly at a rate of 2 tons per acre to form a continuous blanket 1-1/2 inches in loose depth over the areas with a slope not exceeding 1:6.

### 3.13 CLEANUP AND PROTECTION

- A. Promptly remove soil and debris created by lawn work from paved areas. Clean wheels of vehicles before leaving site to avoid tracking soil onto surface of roads, walks, or other paved areas. Broom clean all walks and pavements.
- B. Erect barricades and warning signs as required to protect newly planted areas from traffic, vandalism, and unauthorized use. Maintain barricades throughout maintenance period until lawn is established and accepted by the Owner.

### 3.14 LAWN MATERIAL INSTALLATION

- A. Lawns: Provide materials in not less than the following quantities:

1. Weight of lime per 1000 sq. ft: as per topsoil test report.
2. Weight of phosphorous per 1000 sq. ft.: as per topsoil test report.
3. Weight of commercial fertilizer per 1000 sq. ft.: as per topsoil test report.
4. Cellulose Pulp 'Fiber: 32# /1,000 SF.
5. Grass Seed: 150 lbs/acre.
6. Starter Fertilizer: 310 lbs./acre.
7. Secondary Fertilizer: 300#/acre.
8. Tertiary Fertilizer 50#/acre, providing 22# of nitrogen/acre.

3.15 SEED

- A. Provide fresh, clean, new –crop seed; blue tag certified complying with the tolerance for purity and germination established by the Office of Seed Analysis of North America. Provide seed of the grass species, proportions and maximum percentages of weed seed.
- B. Provide seed in cleaned, sealed, properly labeled containers. Seed that is wet, moldy, or otherwise damaged will not be accepted. Handle seed to manufacturer recommendations for exposure to extremes of heat, cold, or moisture.
- C. Lawn Seed Quality:
  1. Weed Seed: maximum of 0.50%, no noxious weed seed.
  2. Purity: minimum of 97% pure.
  3. Crop: maximum 0.50%
  4. Germination Rate: minimum 85%.

D. Mixture for General Lawn Areas:

| TYPE OF SEED                 | PERCENT BY WEIGHT |
|------------------------------|-------------------|
| Perennial Ryegrass           | 30%               |
| 50% Manhattan                |                   |
| 50% Saturn                   |                   |
| Fine leaf or Creeping Fescue | 25%               |
| 50% Pennlawn                 |                   |
| 50% Jamestown II             |                   |
| Kentucky Bluegrass           | 45%               |
| 50% Glade                    |                   |
| 50% Cobart                   |                   |

3.16 SLOPE SEED MIX

- A. Refer to Form 816, Section M.13.04.

END OF SECTION 32 92 00

## **SECTION 32 93 00 — PLANTS**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”

#### **1.2 SUMMARY**

- A. This Section includes the following:
  - 1. Providing and installing all plant materials.
  - 2. Source inspection
  - 3. Plant pit excavation and preparation and installation of all backfill mixtures.
  - 4. Planting all trees, shrubs, perennials, and groundcovers, including finishing operations, and transplanting of designated material.
  - 5. Planting pond enhancement and wildlife enhancement/restoration areas.
  - 6. Mulch for all plant bed and saucer areas.
  - 7. Protection, maintenance and replacement of plant material and related items.
- B. Related Sections include the following:
  - 1. Division 32 Section “Topsoil.”
  - 2. Division 32 Section “Turf and Grasses”.

#### **1.3 QUALITY ASSURANCE**

- A. Standards:
  - 1. All plants shall meet or exceed the specifications of Federal, State of Connecticut and County laws requiring inspection for plant disease and insect control.
  - 2. Quality, size and ball size shall conform with the latest edition of ANSI Z60.1 By the American Nursery & Landscape Association (AN & LA) and its amendments.
  - 3. All plants shall be certified true to name by the nursery source. Sealed certificates from the nursery source shall be submitted prior to any plant material installation. One plant of each species shall be tagged with the name and size of the plant in accordance with the standards of practice of the American Nursery & Landscape Association. Botanical names shall take precedence over common names.
- B. Qualifications of Installers
  - 1. Provide at least one person who shall be thoroughly familiar with the type of materials being installed and shall direct all work performed under this Section.

- C. Nursery Coordination:
  - 1. Each specific plant type shall be provided from a single nursery source unless otherwise approved.
- D. Environmental enhancement plantings must conform to the conditions issued by the Inland Wetlands and Watercourses Commission.

#### 1.4 SUBMITTALS

- A. Product Literature:
  - 1. Tree wrap.
  - 2. Fertilizers, including bone meal and dehydrated manure.
  - 3. Tree anchors.
  - 4. Anti-desiccant.
  - 5. Peat moss/amendments.
- B. Samples: Shredded Bark Mulch
- C. Topsoil: Testing reports/analysis, as per Division 2 Section "Topsoil": must be submitted prior to preparation of planting mixtures.
- D. At completion of the installation of all plant materials, the Contractor shall submit a "**Certification of Planting**", on company letterhead stationary, indicating compliance with Drawings and Specifications in the installation of plant materials. This certification must be submitted to the Landscape Architect for approval.

#### 1.5 NURSERY SOURCE INSPECTION AND ACCEPTANCE OF PLANT MATERIAL

- A. All plant material(s) are subject to inspection and acceptance by the Architect at the nursery source or place of growth. Do not dig plant material until inspected, tagged and approved by the Architect. Contractor must provide all transportation and shall accompany the architect for all source inspections.
- B. All plant material when inspected at the nursery source by the Architect is not to be "heeled-in" or "out-ground". Stockpiled material is not acceptable unless otherwise approved by the Architect.
- C. All plant material is also subject to reinspection and approval by the Architect once the plant material has been delivered to the project site. All plant material shall arrive at the site with the Architect's permanent tags. Any plant material rejected by the Architect shall be immediately removed from the project site and replaced with acceptable plant material at no additional cost to the Owner.
- D. All plant material must be accompanied by nursery inspection certificates, as required by State of Connecticut or Federal Regulations.

## 1.6 PLANT LIST

- A. The Plant List appears on the Drawings and is for the Contractor's information only and no guarantee is expressed or implied that quantities therein are correct or that the list is complete. Contractor shall guarantee that all plant materials shown on the Drawings are included in the final project. The submission of a bid by the Contractor acknowledges that the plant material types and sizes shown on the Contract Documents are available.

## PART 2 - PRODUCTS

### 2.1 TREES, SHRUBS, GROUND COVER, AND PERENNIALS

- A. Nursery grown unless otherwise noted. Transplanted material stored from previous site demolition/preparation operations.
- B. Hardy under climatic conditions similar to those in the locality of the project.
- C. Typical of their species or variety, with a normal habit of growth. Sound, healthy and vigorous. Well-branched and densely foliated when in leaf, free of disease, insect pests, eggs or larvae. Shall have healthy well-developed root systems. All trees shall have straight single trunks with their main leader intact unless otherwise stated. Stock shall have uniform height and spread to assure symmetry in planting.
- D. Substitutions will be permitted only upon written approval by the Architect.
- E. Sizes shall conform to the measurement specified on the Drawings. Take caliper measurements 6" above ground for trees up to 4" caliper size, 12" above ground for larger sizes. Measure main body of tree or shrub for height and spread; do not measure branches tip to tip. Plants larger than specified on the drawings may be used if approved by the Architect. Use of such plants shall not increase the Contract price.
- F. Quantities: If there is a discrepancy between plants shown on the drawings and quantities given, the greater number will prevail. Discrepancies will not entitle the Contractor to and extra.

### 2.2 PLANT PIT BACKFILL MIXTURES

- A. General: Provide mixtures as required. Bulk mix on-site, no off-site mixing allowed.
- B. Planting Mixture
  - 1. 1 Part dehydrated cow manure
  - 2. 2 Parts peat moss
  - 3. 5 Parts topsoil

### 2.3 TOPSOIL

- A. As per Division 32, Section "Topsoil".

## 2.4 FERTILIZERS

- A. Deliver fertilizers in unimpaired condition, in sealed containers fully labeled according to applicable State of Connecticut Law.
  - 1. Bonemeal shall be finely ground commercial raw bonemeal having a minimum analysis of one (1) percent nitrogen and eleven (11) percent phosphoric acid.
  - 2. Plant fertilizers shall be a complete plant food with a guaranteed analysis of 10.10.10 unless otherwise approved by the Architect. Fertilizer shall contain 50% slow release nitrogen and 50% quick release.

## 2.5 PEAT

- A. Domestic or imported product consisting of partially decomposed vegetable matter of natural occurrence.

## 2.6 DEHYDRATED COW MANURE

- A. Dehydrated cow manure shall be Bovine, containing not more than 25 percent by volume of straw, sawdust, or other bedding materials; free of toxic substances, stones, sticks, soil, weed seed and material harmful to plant growth.

## 2.7 STAKES

- A. 2" X 2" rough sawn or 3" diameter by minimum eight (8) foot long pointed cedar, oak or pressure treated stakes.

## 2.8 GUY WIRE FOR STAKING

- A. Two strand 11 gauge twisted bonded "Black" vinyl coated galvanized steel wire as manufactured by Colorguard Corporation (201) 526-0255 or approved equal.

## 2.9 TURNBUCKLES

- A. Galvanized steel of size and gauge to provide tensile strength equal to that of the wire.

## 2.10 FRICTION GUARDS FOR STAKING

- A. Black rubber reinforce hose not less than 1/2" I.D.

## 2.11 CLOTH TIES

- A. At the Contractor's option, in lieu of the guy wires, turnbuckles and friction guards specified above, the trees may be guyed to wooden stakes utilizing flat, woven polypropylene, 3/4 inch tie material, specifically manufactured for tree guying. Material shall have 900 pound breaking strength and be white in color. Guy fabric shall be similar to Arbor Tie, by Deep Root Partners, L.P., New York, NY, or approved equal.



2.12 FLAGS

- A. Shall be plastic, color – orange, min. 3” x 10”.

2.13 TREE ANCHORING SYSTEM

- A. Similar to prepackaged kit components and accessories as manufactured by Foresight Products, Inc. Duckbill Model 68DTS. At special restricted areas, noted on Drawings, utilize Model 88BK, or approved equal.

2.14 MULCH

- A. Shall be finely shredded pine or cedar bark mulch. Sample to be approved.

2.15 TREE WRAPPING MATERIAL

- A. Six inch wide heavy duty, untreated burlap tree wrap as supplied by Good Product Sales, Inc., Kenilworth, New Jersey, (201) 245-5055 or approved equal. Twine for tying to be not less than 2 ply jute. Tape not permitted.
- B. At Contractor's option, tree wrap material may be creped paper, consisting of two 30 pound layers of Kraft paper, laminated with a 25 pound layer of asphalt, similar to Clark's Tree wrap, or approved equal.

2.16 ANTI-DESICCANT

- A. “Vaporguard” as manufactured by Miller Chemical Fertilizer Corporation; Hanover, Pennsylvania or approved equal.

2.17 WATER

- A. Potable. This Contractor is responsible for furnishing all water necessary to complete the establishment and maintenance of all plantings associated with this project until accepted by Owner. This requirement includes providing all water in irrigated areas, if any, until irrigation system is activated.

2.18 SAFETY BARRICADE

- A. Refer to Section “Site Clearing” of this specification.

### PART 3 - EXECUTION

#### 3.1 PRODUCT HANDLING

##### A. Delivery and Storage:

1. Deliver all items to the job site in their containers with all labels intact and legible at the time of inspection. Root balls shall not be cracked or broken. Notify Architect of delivery schedule at least two (2) days in advance so plant material may be inspected upon arrival at job site. Remove unacceptable plant material immediately from job site. Do not prune plants prior to delivery.
2. Use all means necessary to protect plant materials before, during, and after installation and to protect the work and materials of all other trades.
3. If planting is delayed more than 6 hours after delivery, set trees and shrubs in shade, protect from weather and mechanical damage, and keep roots moist. Cover root ball with mulch, peat moss, etc. Water and feed plant foliage and roots as often as necessary to maintain plant viability.

B. Replacements: In the event of damage, immediately make all repairs and replacements necessary to no additional cost to the Owner.

C. Delivery: Deliver fertilizer to site in original unopened containers bearing manufacturer's guaranteed chemical analysis, name, trade name and conformance to state law.

#### 3.2 PLANTING SEASON

A. Progress with planting only under favorable weather conditions. Planting will not be permitted when ground is frozen or excessively moist. Time of planting is at the discretion of the Contractor except as noted.

#### 3.3 JOB CONDITIONS

A. Examine the areas and conditions under which work of this Section will be performed. Correct conditions detrimental to the proper and timely completion of the work. Do not proceed until unsatisfactory conditions have been corrected. Coordinate work with other related site work that is not included in this Contract. Maintain proper sequencing of operations. Commencement of work implies acceptance by Contractor of preparatory work by others.

- B. The Contract drawings show the approximate locations of utility structures in the area of proposed landscape development. Exercise care when digging in these areas. The Contractor is responsible for any damage and shall replace or repair any damage at the Contractor's expense. Changes in the locations of plant material due to utility obstructions shall not be cause for extra compensation.
- C. Notify the Architect at least two (2) days prior to commencing any of the planting operation included in this Section.
- D. Plant locations on the Drawings are approximate and are to be used only as a guide. Contractor shall provide all field engineering services to accurately stake out locations for all plants outlines of plant beds. Do not begin excavation until Architect has approved specific layout. Relocate the planting, without extra compensation if directed prior to final installation.
- E. Upon completion of planting remove from the site all excess soil, mulch, materials and debris resulting from work operations of this Section. Restore to original conditions all damaged pavements, structures and lawn areas resulting from landscaping operation. Broom clean all walks and pavements. Dispose of all debris off-site in a satisfactory legal manner.
- F. Maintain the site area in a neat and clean condition at all times.

### 3.4 PLANTING MIXTURE

- A. Provide planting mixtures for specific plants, shrubs, and groundcover, as specified. Thoroughly mix all amendments to topsoil prior to commencing planting operations.
- B. Schedules.
  - 1. Groundcover Areas: 12" depth
  - 2. Perennial Plantings: 12" depth
  - 3. Continuously Excavated Shrub Beds: 18" depth.

### 3.5 PLANTING AND TRANSPLANTING PROCEDURES

- A. Balled and Burlapped Planting:
  - 1. Stake all plant locations in the field as per the planting plan. Obtain Architect's approval of all plant locations.
  - 2. Excavate plant pits as detailed, remove excess excavated material. Scarify bottom and sides of each plant pit. Tree pits minimum 24" greater in diameter than the plant ball, and 6" deeper except as detailed. Shrub excavations shall be minimum 12" greater in diameter than ball and 6" deeper.
  - 3. All plant pits must be free draining. Notify the Architect if positive drainage does not exist.
  - 4. Set all plants in the center of plant pits, plumb and straight and as detailed on the Drawings.
  - 5. Handle balled and burlapped plants from the ball only.
  - 6. Face each plant to give best appearance and as accepted by the Architect.

7. Carefully remove only surplus bindings and synthetic material that do not readily decompose. Cut off or fold back top third of burlap away from the plant. Remove portions of any wire baskets, if present.
8. Backfill all pits 2/3 their depth with prepared plant backfill mixture, water thoroughly and allow to settle, then tamp around to fill all voids and air pockets. Complete backfilling to conform to required elevation after settlement. Do not allow excavated material to be mixed with plant backfill material. Minimum 3 guys per tree.
9. Form saucer and install mulch over entire plant pit and saucer area as detailed.
10. Transplant designated materials to locations indicated. Conform to current AN & LA standards, including root ball size determination.

### 3.6 CONTINUOUS EXCAVATION

- A. All perennial and shrub plant beds to be continuously excavated to depths required to allow installation of specified backfill mixture.
- B. Backfill completely with specified Plant Mix.
- C. Install plants as per Planting and Transplanting paragraph of this Section.

### 3.7 FERTILIZERS FOR PLANTS IN SAUCERS

- A. Fertilize each plant area or plant saucer area at a uniform rate, as per topsoil test report and manufacturer's recommendations.

### 3.8 FINISHING OPERATIONS

- A. Guying and Staking Trees:
  1. Guy, stake and anchor each tree as shown on the applicable drawings immediately after planting. Fasten anchors to trees with cable and run through a rubber hose (friction guard) and tighten cables or guy wires. Each friction guard shall be placed around a minimum of 3 main stems on all multi-stemmed plants. Keep trees plumb and taut. Guying procedures may be modified only if acceptable to the Architect.

2. Place rubber hoses of sufficient length to prevent injury to tree trunks around cables or guy wires.
  3. Guying cables and wires not to interfere with lower limbs and to be equally spaced and under same tension. Place tree stakes as detailed. Installed guy wires at least 6 feet above finish grade for all trees of 3' caliper and over. Install guy wires at least 5' above finish grade for all and trees of less than 3" caliper.
  4. Install orange flagging tape on all guy wires for plants located in open lawn areas or adjacent to pedestrian walkways.
- B. Wrapping: Wrap all deciduous trees immediately after planting. Wrap the trunks of all trees spirally from the ground line to above the lowest main branches. Overlap wrapping material by 50% and securely tie in at least five places including the top, middle and bottom. Use twine for tying. Tape not permitted.
- C. Mulching: Mulch all plant and shrub beds with a four (4) inch deep layer of bark mulch, except as noted for groundcover areas. Each saucer to be left in neat orderly condition.
- D. Anti-Desiccant: Spray all trees with one (1) application of anti-desiccant in accordance with manufacturer's directives. Apply protective film over all parts of branches, twigs and foliage. Spray as per manufacturer's recommendations.
- E. Watering Plants: Thoroughly water all plants to a maximum root depth immediately after planting and as necessary to guarantee the plant material.
- F. Pruning: The amount of pruning to be limited to the minimum necessary to remove dead wood or injured twigs or branches. All cuts to be made flush, leaving no stubs. Prune all deciduous trees and shrubs in accordance with current AN & LA standards, and to the requirements of the Architect.
- G. The Contractor shall provide Safety Barricade fencing at all areas along walks where planting may be susceptible to damage by pedestrian traffic, specifically at walk intersections, high traffic areas, and areas determined by the Landscape Architect. The fence shall remain in place and be maintained by the Contractor until the Landscape Architect or Owner determines that the plant material has developed sufficiently to deter or withstand pedestrian traffic.

### 3.9 REPAIR OF LAWN AREAS

- A. Repair all lawn areas damaged/disturbed during all planting operations. Keep pavements clean and work area in an orderly condition.
- B. Provide sediment and erosion control measures as required to protect unestablished areas from erosion.

### 3.10 DISPOSAL OF SURPLUS AND WASTE MATERIALS

- A. Remove surplus soil and waste material, including excess subsoil, unsuitable soil, trash and debris and legally dispose of it off the Owner's property.

3.11 MAINTENANCE

- A. Required maintenance period begins immediately after planting and includes all transplanted materials. Contractor shall continue maintenance until **Architect's approval of 'Certification of Planting'** and the commencement of the guarantee period.
- B. Maintenance responsibilities include pruning, cultivating, watering, weeding, fertilizing, restoring plant saucers, tightening and repairing stakes and guy supports, and resetting to proper grades or vertical position, as required to establish healthy, viable plantings. Restore or replace damaged tree wrappings.
- C. Correct defective work as soon as possible after detection. Obviously dead plant material shall be removed immediately, regardless of replacement plant timing. Correct dangerous conditions immediately.

3.12 GUARANTEE REQUIREMENTS

- A. The planting guarantee period for all plants will begin upon the Architect's approval of 'Certification of Planting' submitted by the Contractor at completion of the planting.
- B. The planting guarantee shall be one year from acceptance of 'Certification of Planting', and shall warranty all plants against defects including death and unsatisfactory growth, except for defects caused by neglect or abuse by the Owner, or incidents that are beyond the Contractor's control.
- C. Plant material is eligible to receive final acceptance one (1) year from the date of the 'Certification of Planting' at Substantial Completion. Planting done in late Fall (after November 1<sup>st</sup>), shall be maintained through the following spring's leafing, at which time, if acceptable, the guarantee periods shall begin.

3.13 FINAL INSPECTION AND ACCEPTANCE

- A. Final Acceptance will be made if all plants meet the guarantee requirements as specified. A sum sufficient to cover the cost of possible replacement plantings will be withheld from the Contractor if plant material is not accepted.

END OF SECTION 32 93 00

## **SECTION 33 41 00 -STORM SEWER SYSTEMS**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. The Contractor, Subcontractors, and/or suppliers providing goods and services referenced in or related to this Section shall also be bound by the Related Documents identified in Division 01 Section “Summary.”
- B. Section 020100 – Protection of Existing Utilities
- C. Section 312333 - Trench Excavation and Backfill for Utilities
- D. Section 312500 – Soil Erosion and Sediment Control
- E. Borough of Naugatuck Engineering Department requirements.
- F. All necessary construction permits.
- G. Contract Documents

#### **1.2 SECTION INCLUDES**

- A. Work under this section shall consist of providing all labor, plant facilities, materials, tools, equipment, shop drawings and supervision necessary and required to install all of the storm drainage facilities as specified in accordance with the Contract Documents. This work shall include but not be limited to:
  - 1. Installation of the drainage system consisting of manholes, catch basins, pipes, and all necessary and required accessory items and operations.
  - 2. Installation of drainage facilities including connection to existing drainage facilities.

#### **1.3 REFERENCE STANDARDS**

- A. American Society for Testing and Materials (ASTM) latest edition.
  - 1. A706 Type 1R
  - 2. C14 Concrete Sewer, Storm Drain, and Culvert Pipe.
  - 3. C55 Concrete Building Brick.
  - 4. C76 Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe.
  - 5. C443 Joints for Circular Concrete Sewer and Culvert Pipe, Using Rubber Gaskets.
  - 6. C478 Precast Reinforced Concrete Manhole Sections.

7. C923 Resilient Connectors between Reinforced Concrete Manhole Structures and Pipes.
8. D1557 Test Methods for Moisture-Density Relations of Soils and Soil-Aggregate Mixtures Using 10 lb (4.54 Kg) Rammer and 18 inch (457 mm) Drop.
9. D2922 Test Methods for Density of Soil and Soil - Aggregate in Place by Nuclear Methods (Shallow Depth).
10. D3017 Test Methods for Moisture Content of Soil and Soil-Aggregate Mixtures.

B. American Association of State Highway and Transportation Officials (AASHTO)- latest edition

1. International Masonry Industry All-Weather Council (IMIAC): Recommended Practices and Guide Specification for Cold Weather Masonry Construction.

1.4 QUALITY ASSURANCE

- A. An Engineer, selected and paid by the Owner (herein referenced to as “Owner’s Engineer”), may be retained to perform construction inspection on-site based on measurement, visual observation, and judgment.
- B. Visual field confirmation may be performed by the Owner’s Engineer as part of the construction testing requirements.
- C. All costs related to re-inspection due to failures shall be paid for by the Contractor at no additional expense to Owner. The Owner reserves the right to direct any inspection that is deemed necessary. Contractor shall provide free access to site for inspection activities.

1.5 SUBMITTALS

- A. Product Data: Provide manufacturer's certificate for castings, pipe and accessories to certify that products meet or exceed specified requirements.
- B. Submit shop drawings of the precast structures to the Owner’s Engineer for review prior to fabrication. Shop drawings shall include dimensions, reinforcing, joint treatment, invert elevations and invert locations.

1.6 PROJECT RECORD DOCUMENTS

- A. Accurately record actual locations of pipe runs, connections, catch basins, and invert elevations.
- B. Identify and describe unexpected variations to subsoil conditions and location of uncharted utilities.

1.7 COORDINATION

- A. Coordinate the Work with termination of storm sewer connection to existing storm sewer system.



## PART 2 - PRODUCTS

### 2.1 SEWER PIPE MATERIALS AND ACCESSORIES

- A. Reinforced Concrete Pipe (RCP): Straight and flared end sections complying with requirements of ASTM C 76, Class III unless another class type is indicated on the Contract Documents, installed with flexible plastic (Bitumen) gaskets at all joints. Gaskets shall comply with AASHTO M-198 75I, Type B, and shall be installed in strict accordance with pipe manufacturer's recommendations.
- B. Corrugated High-Density Polyethylene Pipe (HDPE): AASHTO M294 Type S for pipe and fittings. Material shall meet ASTM D1298 Type III, Category 4, Grade P33, Class C, or ASTM D3350 cell Classification 32442OC. Pipe shall be manufactured by Advanced Drainage Systems, Inc. with watertight joints according to the requirements of ASTM D3212 or approved equal. Installation shall be in accordance with ASTM D2321.
- C. Polyvinyl Chloride Pipe (PVC) On-site pipe and fittings shall comply with ASTM D 3034, rated SDR 35 unless otherwise specified on the Contract Documents or required by the local utility. Pipe shall be continually marked with manufacturer's name, pipe size, cell classification, SDR rating, and ASTM D 3034 classification.
  - 1. Pipe joints shall be integrally molded bell ends per ASTM D 3034, Table 2, with factory supplied elastomeric gaskets and lubricant.
- D. Aluminized Steel Type 2 Corrugated Steel Pipe (CMP): Pipe shall meet the requirements of ASTM A929 or AASHTO M274. The minimum gage for pipe materials shall be 16 gage for diameters of 10-24 inches, 14 gage for diameters of 30-48 inches, 12 gage for diameters of 54-96 inches and 10 gage for diameters of 102 inches and larger, but not less than the gage otherwise indicated on the drawings. Each pipe shall be clearly marked to show class or gauge, date of manufacture, and name or trademark of the manufacturer. Joints for corrugated metal pipe, pipe arches and fittings shall be minimum ten inches wide outside collars or coupling bands of aluminized steel angles riveted near the ends and bolted through angles to draw the bands tight for silt-tight designations. Additionally, a seven inch wide by 3/8 inch thick one piece continuous neoprene gasket per ASTM D1056 shall be provided at watertight designations.
- E. Ductile Iron Pipe (DIP)
  - 1. 1. Ductile Iron Pipe: Centrifugally cast in metal or sand molds in accordance with A.N.S.I. Specification A21.51, minimum thickness Class 52, unless otherwise required.
  - 2. 2. Ductile Iron Pipe Joint Device: Conform to requirements of A.N.S.I. A.21.11 and shall be of a type that employs a single elongated groove gasket to effect a joint seal such as United States Pipe Company's "Tyton" joint, James B. Clow and Sons, Inc. "Bell-Tite", or equal.
  - 3. 3. The outside of the pipe shall be coated with a uniform thickness of a hot applied coal tar approximately 1 mil. thick.

- F. Furnish factory fabricated ells, tees, reducer, wyes, couplings, increasers, crosses, transitions, access manholes and end caps of the same type and class of material as the conduit, or of material having equal or superior physical and chemical properties.

## 2.2 CATCH BASINS, INLETS, MANHOLES AND COMPONENTS

- A. General: All manholes, catch basins and drain inlets shall be built in accordance with, and in the locations shown on the Contract Documents. All structures will require shop drawings approved by the Owner's Engineer and Town Engineer.
- B. No concrete or masonry shall be placed when the temperature is below forty (40) degrees Fahrenheit, or when indications are for lower temperatures within twenty-four (24) hours, unless protection of concrete and masonry is approved by the Owner's Engineer. Damage to the structure because of freezing shall be corrected by the Contractor at his own expense, to the satisfaction of the Owner's Engineer.
- C. Manholes, catch basins and drain inlets shall be constructed as soon as the pipe laying reaches the location of the structures. Should the Contractor continue his pipe laying without making provisions for completion of the structures, the Owner's Engineer shall have the authority to stop the pipe laying operations until the structure is completed.
- D. Any structure which is mislocated or oriented improperly shall be removed and re-built in its proper location, alignment and orientation at the Contractor's expense.
- E. Precast Concrete Manholes: AASHTO M199-93/ASTM C478-90b. Manhole diameter shall be selected to accommodate the inflow and outflow pipes.
- F. Pour-in-place or Precast Reinforced Concrete Catch Basins (Control Structures): AASHTO M199-93/ASTM C478-90b rated for H20 loading, with minimum concrete strength of 3,000 psi. Inlet size shall be selected to accommodate the inflow and outflow pipes.
  - 1. Manhole Barrel: Reinforced precast concrete in accordance with ASTM C478 with gaskets in accordance with ASTM C923 & C361
    - a. Construct manholes of precast concrete sections as required by Contract Documents to size, shape, and depth indicated, but never less than 4-ft inside diameter.
  - 2. Mortar and Grout: Mortar for finishing and sealing shall be Class "C". Honeycombing less than two (2) inches deep shall be repaired using Class "D" mortar.
  - 3. Brick Transition Reinforcement: Formed steel 8-gage wire with galvanized finish.
  - 4. Foundations: All foundations shall rest on firm soil of uniform bearing and stone subbase as shown on Contract Documents.
  - 5. Inverts: Brick or smooth concrete invert channels shall be constructed in all manholes and in all catch basins and drain inlets which do not have sumps, to insure a smooth flow of water through the structure.

6. The invert channel shall be constructed to the elevations shown on the Contract Documents and/or as approved by the Owner's Engineer. Channels shall slope smoothly and evenly from the entrance pipe to the outlet pipe.
7. Frames, Cover, and Gratings: Frames, Covers and/or gratings for manholes, catch basins, and drain inlets shall be of the type and size indicated on the Contract Documents. Frames shall be well bedded in mortar and shall be set accurately to the correct alignment and grade.
8. Ladder Rungs: Forged Aluminum to dimensions shown on Contract Documents to be Alco steps 6061T6 or approved equal.
9. Precast Structures: Precast structures shall be installed only after shop drawings have been approved by Owner's Engineer and shall meet the requirements of ASTM C478.
10. Grout around pipes which protrude through the walls of the structure and on all joints shall contain "Antihydro", or other approved additive to insure water tightness. Cement grout shall contain two parts cement to one part sand and additive in accordance with manufacturer's recommendations. Mortar shall be applied to the bottom 1/3 of the opening before the pipe is inserted.
11. The top grade of the precast concrete corbel section shall be set sufficiently below finished grade to permit a maximum of seven (7) and a minimum of two (2) courses of 8-inch brick to be used as risers to adjust the grade of the casting. Manhole frames shall be set on a grout pad as specified herein above.
12. Provide precast manhole shaft construction with eccentric cone top section and lipped male/female rubber gasket joints or mortar joints.
13. Brick shall be new units conforming to AASHTO Designation M-91, latest revision, Grade MS.
14. Mortar shall conform to ASTM C270, Type M.
15. Pipe joints for rigid pipes shall be made with mortar, grout, gaskets, or as recommended by the pipe manufacturer.
16. Manholes and Pipe constructed within the Right-of-Way shall be manufactured and installed in accordance with all applicable Standard Specifications and the Contract Documents.

### PART 3 - EXECUTION

#### 3.1 EXAMINATION

- A. Verify that trench cut and excavation is ready to receive work and excavations, dimensions, and elevations are as indicated on Contract Documents.

### 3.2 INSPECTION

- A. Contractor to perform video inspection to verify condition of all existing storm drainage pipes and structures to remain. Contractor to repair or replace pipe or structures as directed if deemed to be in poor condition by owner or engineer.

### 3.3 PREPARATION

- A. Hand trim excavations to required elevations. Correct over-excavation with fine aggregate.
- B. Remove large stones or other hard matter which could damage piping or impede consistent backfilling or compaction.
- C. Protect benchmarks, property corners, and other survey monuments from damage or displacement. If marker needs to be removed it shall be referenced by licensed land surveyor and replaced, as necessary, by same.

### 3.4 GENERAL

- A. The Contractor shall install all drainage structures and pipe in the locations shown on the Contract Documents and/or as approved by the Owner's Engineer. Pipe shall be of the type and sizes specified and shall be laid accurately to line and grade. Structures shall be accurately located and properly oriented.
- B. Excavation and Backfill shall be in accordance with Section 312333 of these specifications.
- C. Storage and Handling of Pipe - All pipe shall be protected against impact, shock and free fall, and only equipment of sufficient capacity and proper design shall be used in the handling of the pipe. Storage of pipe on the job shall be in accordance with the pipe manufacturer's recommendations.
- D. Damage to Pipe - Pipe which is defective from any cause, including damage caused by handling, and determined by the Owner's Engineer as unrepairable, shall be unacceptable for installation and shall be replaced at no cost to the Owner as directed by the Owner's Engineer.
- E. Pipe that is damaged or disturbed through any cause prior to acceptance of the Work, shall be repaired, realigned or replaced as directed by the Owner's Engineer, at the Contractor's expense.

### 3.5 BEDDING

- A. Excavate pipe trench and place bedding material in accordance with Section 312333 for work of this Section.

### 3.6 INSTALLATION - PIPE

- A. Laying Pipe: Each length of pipe shall be laid with firm, full and even bearing throughout the entire length, in a trench prepared and maintained in accordance with Section 312333 of these Specifications and Contract Documents. Pipe shall be laid upgrade unless otherwise approved by the Owner's Engineer.

- B. Concrete pipe over 24-inches in diameter shall be laid with the lift holes on top of the pipe. After the pipe is installed, the lift holes shall be sealed with suitable concrete plugs to the satisfaction of the Owner's Representative. No lift holes will be permitted in pipes 24-inches in diameter and smaller.
- C. Bell and spigot pipe shall be laid with the bell end upgrade. The pipe shall be joined so that there will be uniform space around the pipe. Trimming of the pipe shall not be allowed.
- D. Every length of pipe shall be inspected and cleaned of all dirt and debris before being laid. Prior to placing a length of pipe, the end of the previously laid length shall be carefully and thoroughly wiped smooth and clean to obtain an even and close fitting joint.
- E. No length of pipe shall be laid until the preceding lengths of pipe have been thoroughly embedded in place, so as to prevent movement or disturbance of the pipe.
- F. Place pipe on minimum 6-inch thick bed of compacted bedding or as detailed on the Contract Documents.
- G. Install pipe, fittings, and accessories in accordance with ASTM C12, ASTM D2321, manufacturer's instructions and/or state or local requirements. Seal joints to be watertight.
- H. Lay pipe to slope gradients noted on Contract Documents with maximum variation from true slope of 1/8-inch in 10-ft.
- I. Place and compact bedding aggregate at sides and to the springline of the pipe as per these Specifications.
- J. Refer to Section 312333 of these Specifications for backfill requirements. Do not displace or damage pipe when compacting.
- K. Full Lengths of Pipe: Only full lengths of pipe shall be used in the installation except that partial lengths of pipe may be used at the entrance to structures where necessary to obtain a proper connection to the structure.
- L. Pipe Entrances to Structures: All pipe entering structures (e.g.: manholes, catch basins, etc.) shall be cut flush with the inside of the structure, and the cut ends of the pipe and surface of the structure shall be properly rounded and finished so that there will be no protrusion, ragged edges, or imperfections that will impede the flow of water or affect the hydraulic characteristics of the installation.
- M. Only full sections of pipe shall be used where entering a structure which will be exposed to view, such as endwalls, headwalls, end sections, etc.
- N. Bedding and Backfilling: The type of materials to be used in bedding and backfilling and the method and placement shall conform to the requirements of these Specifications.
- O. Protection During Construction: The Contractor shall protect the installation at all times during construction, and movement of construction equipment, vehicles and loads over and or adjacent to any pipe shall be performed at the Contractor's risk.

- P. Tolerance: Pipe shall be laid accurately to the line and grade shown on the Contract Documents and/or as approved by the Owner's Engineer. Allowable tolerances shall be 1/2-inch on grade and 1-inch on line in any section of pipe between structures. Deviations from these tolerances shall be a basis for rejection of the line of pipe by the Owner's Engineer. Any line which has been rejected shall be rebuilt to correct line and grade by the Contractor at his own expense.

### 3.7 INSTALLATION - CATCH BASINS, MANHOLES AND CONTROL STRUCTURES

- A. Form bottom of excavation clean and smooth to correct elevation.
- B. Form and place cast-in-place concrete base pad, with provision for storm sewer pipe to be placed at proper elevation.
- C. Place precast reinforced concrete sections with provision for storm sewer pipe sections at the location and elevation specified on the Contract Documents.
- D. Level top surface of each precast concrete shaft sections as assembly progresses.
- E. Establish elevations and pipe inverts for inlets and outlets as indicated.
- F. Lay brick masonry in running bond with full 3/8-inch mortar joints to receive casting assembly. Level casting frame in grout to receive grated inlet or manhole cover.

### 3.8 PLACING PRE-CAST MANHOLE BARREL SECTIONS

- A. Place base pad to proper elevation and location and trowel top surface level for placement of manhole barrel.
- B. Place manhole barrel plumb and level to correct elevations and anchor to base pad.
  - 1. After completion of slab foundation the first joint of manhole barrel shall be lowered into position, grooved end first, and set level and plumb on concrete base. Align and adjust to proper grade prior to placing and forming invert which shall be poured immediately after setting of first section of manhole barrel.
  - 2. Prior to setting subsequent manhole barrel sections, apply primer to tongue and groove ends and allow to set in accordance with manufacturer recommendations. Place "Ram-nek", or equivalent, plastic rope on tongue end. Lower next section into position, and remove excess material from interior of structure. Add additional material on exterior of joint, if necessary, for completely watertight joint.

### 3.9 PIPE JOINTS

- A. Mortar Joints (RCP): After each length of RCP is laid, the lower portion of the bell shall be filled with mortar, and the succeeding length shall be laid in place so that the inner surfaces of the abutting lengths are flush. The remainder of the joint shall be completely filled with mortar and sufficient additional mortar used to form a bead around the joint flush with the outside diameter of the bell. The inside of the joint shall be wiped and finished smooth. Joints shall be thoroughly wet before the mortar is placed.

- B. Cold Applied Joint Sealer (RCP): Bell and spigot or tongue and groove RCP shall be wiped clean and dry before applying the sealer to the pipe joint. Before the pipes are placed in contact with each other, the spigot end or tongue end of the pipe shall be completely covered with an excess of sealer, and then the pipe shall be laid to the established line and grade so that the inside surfaces of abutting pipe are flush.

### 3.10 REMOVAL OF EXISTING UTILITIES

- A. The Contractor shall remove and legally dispose of off-site all abandoned utilities encountered during installation of the storm drainage facilities.

### 3.11 CLEANING AND REPAIR

- A. The Contractor will be required to clean the entire drainage system of all debris and obstructions both during construction and at the end of construction prior to acceptance. This shall include, but not be limited to, removal of all formwork from structures, concrete and mortar droppings, construction debris and dirt. The system shall be thoroughly flushed clean and the Contractor shall furnish all necessary hose, pumps, pipe and other equipment that may be required for this purpose. No debris shall be flushed into existing storm drains, wetlands, or streams; all debris shall be removed from the system and disposed of in accordance with all governing agencies.
- B. After the system has been cleaned, the Contractor shall thoroughly inspect the system along with the Owner's Engineer and all repairs shown to be necessary shall be promptly made by the Contractor.
- C. All Work of cleaning and repair as specified herein shall be performed at the Contractor's expense and to the complete satisfaction of the Owner's Engineer.

### 3.12 FINAL INSPECTION

- A. Upon completion of the Work and before final acceptance by the Owner, the entire drainage system shall be subject to a final inspection in the presence of the Owner's Engineer and Borough Engineer. The Work shall not be considered as complete until all requirements for line, grade, cleanliness, and workmanship have been completed to the satisfaction of the Owner's Engineer and the Town Engineer.

END OF SECTION 33 41 00

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**



**KAE**STLE BOOS  
a s s o c i a t e s , i n c

416 Slater Road, P.O. Box 2590, New Britain, CT 06050-2590  
Phone: 860-229-0361 ▲ Fax: 860-229-5303

325 Foxborough Boulevard, Suite 100, Foxborough, MA 02035  
Phone: 508-549-9906 ▲ Fax: 508-549-9907

Email: [kba@kba-architects.com](mailto:kba@kba-architects.com) ▲ Web: [www.kba-architects.com](http://www.kba-architects.com)

**DO NOT REMOVE  
THIS PAGE INTENTIONALLY LEFT BLANK**